

Estimate

ADDRESS ESTIMATE 11313

TOILET PARTITIONS PRICING DATE 04/16/2024

SALES REP JOB NAME ROB 619-387-8128 17029363 Rev 2

ACTIVITY	DESCRIPTION	QTY
MATERIAL TYPE	POWDER COATED STEEL	
STYLE	CEILING HUNG - 7' CEILING HT.	
COLOR	510 BLACK	
HARDWARE	STANDARD	
STALLS	INCLUDED	28
LEAD TIME	APPROXIMATELY 3-6 BIZ DAYS	
FREIGHT	ZIP CODE 21201 INCLUDED	

*** Sales tax will be added if shipping to: AZ, CA, FL, GA, IL, MD, MA, MI, MN, NJ, NY, NC, OK, TN, TX, VA, AND WA.

TOTAL

\$13,998.05

Accepted By


Accepted Date



POWDER COATED METAL COLOR CARD

QUICK SHIP COLORS

*Delivered in 3-6 Business Days

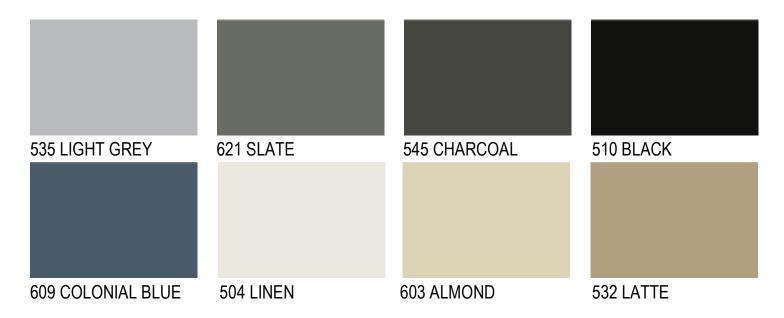

STANDARD COLORS

*Delivered in 12-18 Business Days






Drawing Notes


- · Compartment widths on drawings are shown at center line of panels.
- · Compartment depths on drawings are shown from front face of pilaster to finished wall.
- · Cut headrail in field to suit (if applicable).
- "X" on drawings indicates that backing is required.
- · Fabrication will not commence until approval has been received.
- · Material supplied will conform to the dimensions indicated on drawings.
- · Scale of drawings none.
- Improve on drawings indicates location of pilaster reinforcing channel(s).

hadrian-inc.com PAGE 1 OF 16

Project Title Steve Marindany Created By Rob Fry Last edit date 04/17/2024 Distributor Fry Specialty Inc.

Drawing Title MEN Date Printed 04/17/2024 Project Number P0724711

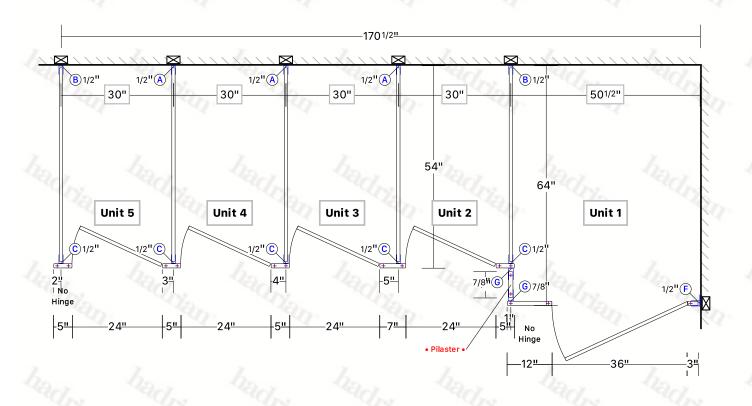




Location of urinal screen(s) may not be correctly reflected in this drawing

A H Bracket B F Bracket C U Clip (AS) Screen H Bracket Panel/Door height = 58" Unit LEGEND Panel/Door AFF = 12" F Pilaster F Bracket Pilaster 21/8" Channel **Product** Toilet Partitions Material Powder Coated Finish 510 - Black Partition Ceiling Hung Series Standard **AFF** 12" Hardware Standard Chrome Options None Sightline Option None Hinge Concealed Latch Concealed Ceiling Height 84"

 Project Title
 Steve Marindany
 Created By
 Rob Fry
 Last edit date
 04/17/2024
 Distributor
 Fry Specialty Inc.

 Drawing Title
 MEN
 Date Printed
 04/17/2024
 Project Number
 P0724711

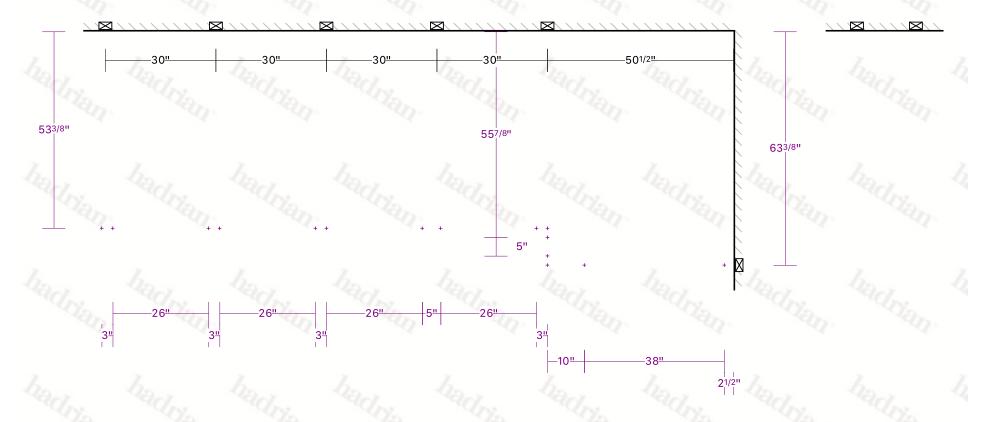



Unit Panel/Door height = 58"
Panel/Door AFF = 12"

Product Toilet Partitions
Series Standard
Sightline Option None

Material Powder Coated
AFF 12"
Hinge Concealed

Finish 510 - Black
Hardware Standard Chrome
Latch Concealed


Partition Ceiling Hung
Options None
Ceiling Height 84"


Drawing Title WOMEN

 Project Title
 Steve Marindany
 Created By
 Rob Fry
 Last edit date
 04/17/2024
 Distributor
 Fry Specialty Inc.


Project Number P0724711

Date Printed 04/17/2024

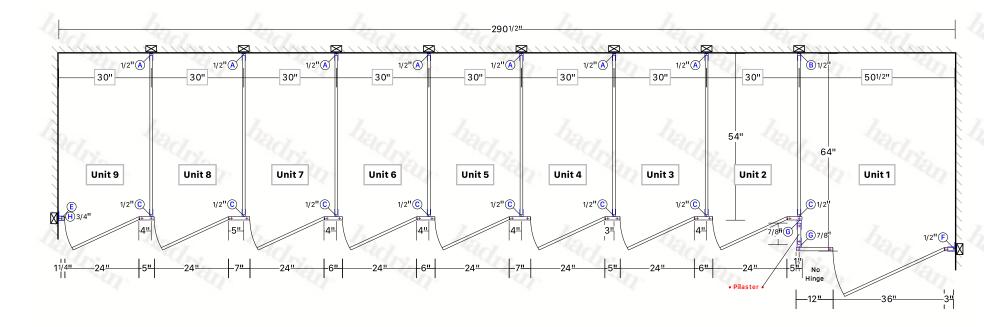

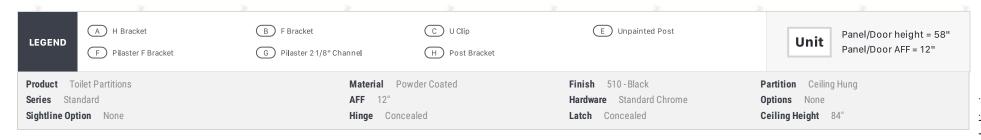

Project TitleSteve MarindanyCreated ByRob FryLast edit date04/17/2024DistributorFry Specialty Inc.Drawing TitleWOMENDate Printed04/17/2024Project NumberP0724711

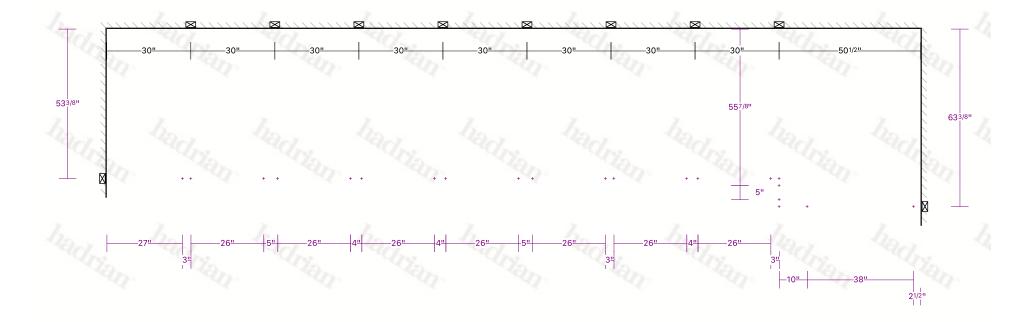

LEGEND

Product Toilet Partitions

Sightline Option None

Series Standard

Material Powder Coated

AFF 12"

Hinge Concealed

Finish 510 - Black
Hardware Standard Chrome
Latch Concealed

Partition Ceiling Hung
Options None
Ceiling Height 84"

Unit

Panel/Door height = 58"

Panel/Door AFF = 12"


 Project Title
 Steve Marindany


 Created By
 Rob Fry

 Last edit date
 04/17/2024

 Distributor
 Fry Specialty Inc.

Drawing TitleMEN # 2Date Printed04/17/2024Project NumberP0724711

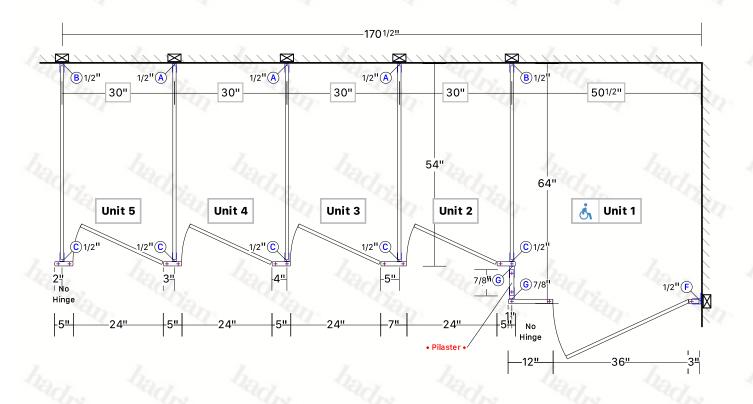




Location of urinal screen(s) may not be correctly reflected in this drawing

A H Bracket B F Bracket C U Clip (AS) Screen H Bracket Panel/Door height = 58" Unit LEGEND Panel/Door AFF = 12" F Pilaster F Bracket Pilaster 2 1/8" Channel **Product** Toilet Partitions Material Powder Coated Finish 510 - Black Partition Ceiling Hung Series Standard **AFF** 12" Hardware Standard Chrome Options None Sightline Option None Hinge Concealed Latch Concealed Ceiling Height 84"

Project TitleSteve MarindanyCreated ByRob FryLast edit date04/17/2024DistributorFry Specialty Inc.

Drawing TitleMEN # 2Date Printed04/17/2024Project NumberP0724711

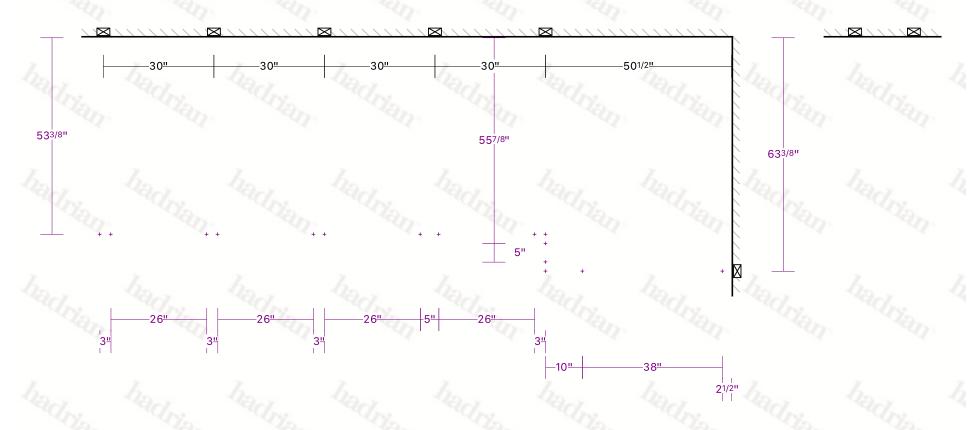

LEGEND

Unit

Panel/Door height = 58" Panel/Door AFF = 12"

Product Toilet Partitions
Series Standard
Sightline Option None


Material Powder Coated
AFF 12"
Hinge Concealed


Finish 510 - Black
Hardware Standard Chrome
Latch Concealed

Partition Ceiling Hung
Options None
Ceiling Height 84"

 Project Title
 Steve Marindany
 Created By
 Rob Fry
 Last edit date
 04/17/2024
 Distributor
 Fry Specialty Inc.


 Drawing Title
 WOMEN - 1
 Date Printed
 04/17/2024
 Project Number
 P0724711

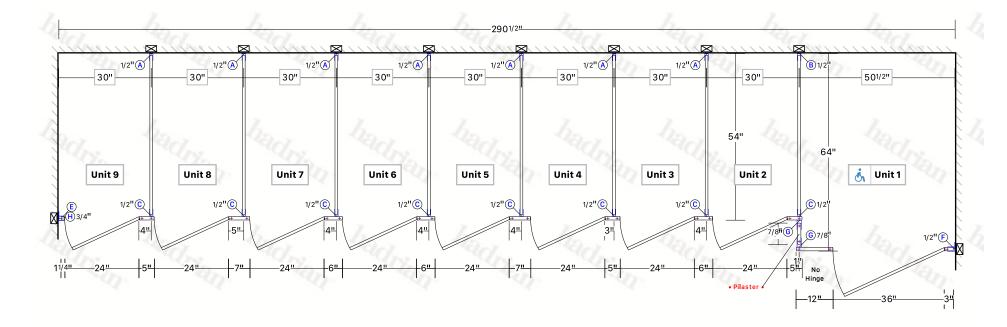

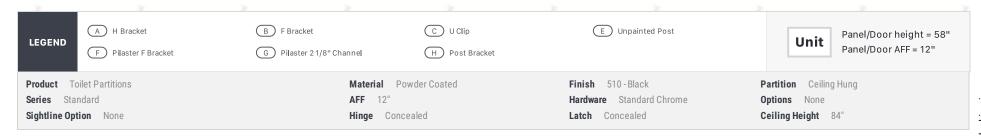

Project Title Steve Marindany Created By Rob Fry Last edit date 04/17/2024 Distributor Fry Specialty Inc.

Drawing TitleWO MEN - 1Date Printed04/17/2024Project NumberP0724711

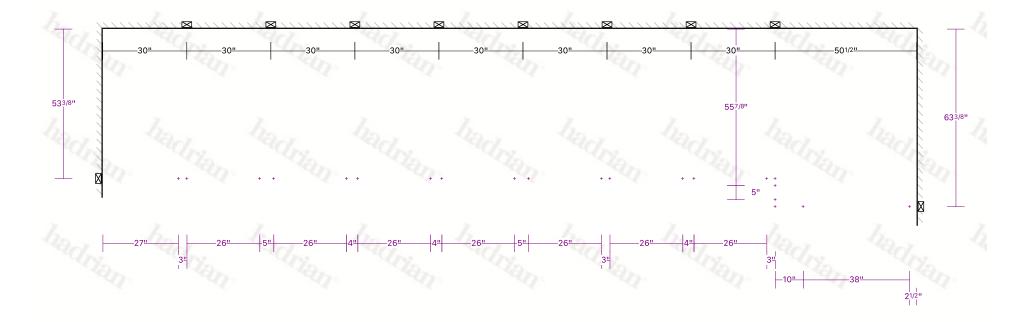

LEGEND

Unit

Panel/Door height = 58" Panel/Door AFF = 12"

 Product
 Toilet Partitions

 Series
 Standard

 Sightline Option
 None

Material Powder Coated
AFF 12"
Hinge Concealed

Finish 510 - Black

Hardware Standard Chrome


Latch Concealed


Partition Ceiling Hung
Options None
Ceiling Height 84"



Recommended Methods for Attaching to a Wall

The details below demonstrate the recommended methods for attaching panels and pilasters to common wall types. Other wall types may be encountered. In all cases, proper wall backing is required to achieve a successful toilet partition installation.

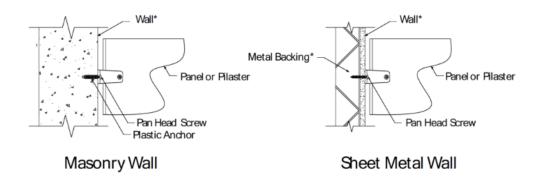



^{*}Not Supplied by Hadrian



Material Specification

CEILING HUNG - POWDER COATED METAL TOILET PARTITIONS - STANDARD

1.01 Construction Features

Doors, Panels and Pilasters shall be constructed of two sheets of panel flatness zinc - coated galvanneal steel, ASTM A653 GR33, laminated under pressure to a honeycomb core for sound deadening and rigidity. Formed edges to be welded together and inter-locked under tension with a roll - formed oval crown locking bar, mitred, welded and ground smooth at the corners. Honeycomb to have a maximum 25 mm(1") cell size.

1.02 Doors

Shall be 1461mm (57.5") high and 25mm (1") thick with cover sheets not less than 0.8mm (.030").

1.03 Panels

Shall be 1461mm (57.5") high and (1") thick with cover sheets not less than 0.8mm (.030").

1.04 Pilasters

Shall be 32mm (1.25") thick with cover sheets not less than 1.2mm (.048").

1.05 Pilaster Fastening Method

Pilasters shall be rigidly fastened to structural steel or pre-cast concrete supporting member (Note: wood support is not acceptable) by means of two heavy hanging studs permitting vertical adjustment between bottom of supporting member and finished ceiling line. Hadrian supplied ceiling studs MUST be used to create a secure installation. The bottoms of all pilasters shall be truly aligned, and the top connection shall be concealed by a 102mm (4") high, die-formed stainless steel pilaster shoe.

NOTE: The above specification does not include the supplying, installing, drilling or tapping of any of the structural members required in the ceiling for the support of these units. Only the stude are supplied for installation by others.

1.06 Hardware and Fittings

All panel and pilaster brackets and all door hardware shall be chrome plated zinc die castings.

Fasteners are zinc plated $12 \times 1-3/4$ " and $12 \times 5/8$ " TR-27 6-lobe security screws.

Doors shall be equipped with chrome plated zinc die cast gravity type hinges, mounted on upper and lower pilaster hinge brackets. Threaded top hinge pin shall be metal with a self-lubricating nylon sleeve. Door hinges shall be fully concealed within the thickness of the door and adjustable to permit the door to come to rest at any position when not latched.

Coat Hook and Bumper: Each door to be fitted with a combined coat hook and bumper. Finish to match other hardware items.

Latch to be a concealed, chrome plated zinc die casting with face mortised flush with edge strip of door.

The combined stop and keeper shall have a 19mm (0.75") diameter bumper locked in place. Finish to match other hardware items. Pilaster shoes to be stainless steel with a #4 brushed finish.

1.07 Finish

All sheet metal to be thoroughly cleaned, phosphated and finished with a high performance powder coating, baked on to provide a uniform smooth protective finish. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): MEN, WOMEN, MEN # 2, WOMEN - 1



WALL MOUNTED - POWDER COATED METAL URINAL SCREENS - STANDARD

1.01 Construction

Screens shall be constructed of two sheets of panel flatness zinc-coated galvanneal steel, ASTM A653 GR33, laminated under pressure to a honeycomb core for sound deadening and rigidity. Formed edges to be welded together and inter-locked under tension with a roll-formed oval crown locking bar, mitred, welded and ground smooth at the corners. Honeycomb to have a maximum 25mm (1") cell size.

1.02 Wall Mounted

Screens shall be 25mm (1") thick with cover sheets not less than 22-gauge (0.8mm / .030"). Screens shall be 457mm (18") or 610mm (24") deep by 1219mm (48") high and anchored into the wall approximately 305mm (12") off the floor.

1.03 Hardware & Fittings

Screens shall be fastened to the wall with double-ear brackets that are chrome plated zinc die cast. Floor mounted with pilaster and floor to ceiling mounted with post to be fastened to the front support with "U" brackets that are chrome plated zinc die cast.

1.04 Finish


All sheet metal to be thoroughly cleaned, phosphated and finished with a high performance powder coating, baked on to provide a uniform smooth protective finish. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): MEN, MEN # 2

hadrian-inc.com PAGE 12 OF 16



Metal Toilet Partitions Standard Series - Ceiling Hung - 12" [305mm] AFF Chrome - Concealed Latch & Concealed Hinge

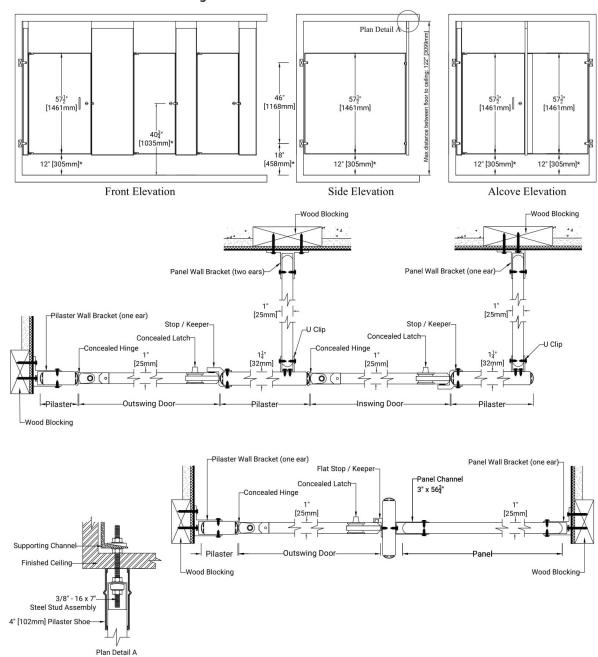

Important Notes:

Refer to final drawings for wood blocking information. Wood blocking is critical to ensure a rigid installation.

Structural steel or pre-cast concrete required as ceiling support. Wood support is not acceptable. Structural ceiling support and drilling for studs by others. Studs supplied by Hadrian but installed by others. Hadrian supplied ceiling studs MUST be used to create a secure installation.

See material specifications for material and hardware finishes.

hadrian-inc.com


^{*}Above finish floor dimensions may vary due to floor level and cam position




Metal Urinal Screens

Standard Series - Wall mounted 12" [305mm] AFF

Stirrup Bracket Installation

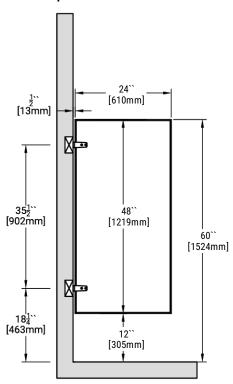



Available Panel Depths

18`` [457mm]

24`` [610mm]



Warranty Information

Hadrian Manufacturing Inc. ("Hadrian") provides the following warranty with respect to the Hadrian product(s) supplied for the project indicated above.

Subject to the terms set out herein, the product(s) are warranted against defects in material and workmanship from the date of receipt by the authorized Hadrian distributor for the warranty period outlined below:

3 years
5 years
25 years
25 years
2 years
5 years
2 years
1 year

The warranty is for Hadrian material only and excludes damages caused by installation errors, vandalism, improper usage, improper maintenance, exposure to harsh environments or chemicals (such as chlorine, bromine, etc.) or failure of the building structure to adequately support the product. Site preparations (i.e. wood blocking, etc.) must meet final drawing specifications and Hadrian's recommended maintenance procedure must be followed.

The exclusive remedy under this warranty shall, at Hadrian's discretion, be replacement or repair of the defective material. Hadrian will not pay any removal, installation or other labor costs associated with the repair or replacement. Replacement material will be warranted for the unused portion of the original warranty period.

No warranty of merchantability or fitness for a particular purpose is made or implied. In no event shall Hadrian be liable for any other costs or damages, including loss of profit, loss of revenue, indirect, incidental, special or consequential damages howsoever arising, whether under warranty, contract, statute, tort, equity or otherwise.

This warranty extends only to the original authorized Hadrian customer and is non-transferable. Warranty claims must be made during the applicable warranty period and initiated by contacting Hadrian at the following coordinates: USA: 440-942-9118 / CANADA: 905-333-0300.

The foregoing constitutes the entire warranty given by Hadrian and no one is authorized to change or expand this warranty on behalf of Hadrian.





Hadrian Manufacturing Inc., 965 Syscon Road, Burlington, ON, L7L 5S3 T: 905-333-0300 F: 905-333-1841 Hadrian Manufacturing Inc., 2550 - 61 Avenue SE, Calgary, AB, T2C 4V2 T: 905-333-0300 F: 905-333-1841 Hadrian Inc., 7420 Clover Avenue, Mentor, OH, 44060 T: 440-942-9118 F: 440-942-9618 Hadrian Inc., 3602 West Washington Street, Suite 200, Phoenix, AZ, 85009 T: 440-942-9118 F: 440-942-9618

08/2023

hadrian-inc.com



Maintenance Procedure

FOR POWDER COATED PAINTED FINISH

MAINTENANCE OF YOUR TOILET PARTITIONS SHOULD BE A PART OF YOUR REGULAR BUILDING PREVENTIVE MAINTENANCE PROCEDURE

- 1. Tighten any screws that have become loose due to vibrational forces or attempted vandalism.
- 2. Check the top door pin to be sure it is flush with the top of the hinge.
- 3. Be sure the surfaces are dry after being cleaned and rinsed with clear water (when required).
- 4. Partitions exposed to severe humidity should be washed and dried frequently. If partitions are in a shower room, a coat of paste wax is recommended on painted surfaces.
- 5. Periodically, remove any dirt, grime or foreign matter with a soft cloth.
- 6. Where surfaces reveal spotting resulting from hand perspiration, soil, or grease, a thorough cleaning with warm water and a mild detergent (ie. Ivory Soap), followed by rinsing, and removal of excess moisture, will renew the clean even surface, providing a pleasant sanitary appearance. (Use of cleaning agents containing abrasives such as household cleaning powder, steel wool, and harsh detergents or acids ARE NOT RECOMMENDED).
- 7. To maintain the brilliance of hardware, these components can be periodically improved by an application of non-abrasive cleaner with a damp cloth.
- 8. Where additional gloss and protection is desirable, light applications of commercial liquid or paste waxes are highly recommended.
- 9. If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.

hadrian-inc.com PAGE 16 OF 16



Estimate

ADDRESS ESTIMATE 11313

TOILET PARTITIONS PRICING DATE 04/16/2024

SALES REP JOB NAME ROB 619-387-8128 17029363 Rev 2

ACTIVITY	DESCRIPTION	QTY
MATERIAL TYPE	POWDER COATED STEEL	
STYLE	CEILING HUNG - 7' CEILING HT.	
COLOR	510 BLACK	
HARDWARE	STANDARD	
STALLS	INCLUDED	28
LEAD TIME	APPROXIMATELY 3-6 BIZ DAYS	
FREIGHT	ZIP CODE 21201 INCLUDED	

*** Sales tax will be added if shipping to: AZ, CA, FL, GA, IL, MD, MA, MI, MN, NJ, NY, NC, OK, TN, TX, VA, AND WA.

TOTAL

\$13,998.05

Accepted By

Accepted Date