



## Estimate

ADDRESS  
TOILET PARTITIONS PRICING

ESTIMATE 11300  
DATE 04/02/2024

SALES REP  
ROB 619-387-8128

JOB NAME  
Steveo Coh

ACTIVITY	DESCRIPTION	QTY
MATERIAL TYPE	POWDER COAT FOR TOILETS	
MATERIAL TYPE	SOLID PLASTIC FOR SHOWERS	
STYLE	FLOOR ANCHORED/OVERHEAD BRACED	
COLOR	<del>STANDARD TBA</del> Toilet Partitions: 535 Light Grey Shower Partitions: 219 Frost Granite	
HARDWARE	STANDARD	
STALLS	INCLUDED	14
SCREENS	WALL HUNG 24"X48"	1
DOORS	INCLUDED FOR SHOWERS	
LEAD TIME	APPROXIMATELY #BIZ DAYS	
FREIGHT	DELIVERED: 6-9 BIZ DAYS 92583	
	*LIFTGATE \$125.00 (REQUIRED IF LOADING DOCK OR FORKLIFT IS NOT AVAILABLE)	
	*NOTIFICATION CALL \$40.00	
	*RESIDENTIAL/CHURCH \$95.00	


\*\*\* Sales tax will be added if shipping to: AZ, CA, FL, GA, IL, MD, MA, MI, MN, NJ, NY, NC, OK, TN, TX, VA, AND WA.

SUBTOTAL	12,224.05
TAX (0%)	0.00
TOTAL	<b>\$12,224.05</b>

Accepted By

Accepted Date

## Drawing Notes

- Compartment widths on drawings are shown at center line of panels.
- Compartment depths on drawings are shown from front face of pilaster to finished wall.
- Cut headrail in field to suit (if applicable).
- "X" on drawings indicates that backing is required.
- Fabrication will not commence until approval has been received.
- Material supplied will conform to the dimensions indicated on drawings.
- Scale of drawings - none.
-  on drawings indicates location of pilaster reinforcing channel(s).



## POWDER COATED METAL COLOR CARD

### QUICK SHIP COLORS

\*Delivered in 3-6 Business Days



535 LIGHT GREY



621 SLATE




545 CHARCOAL




510 BLACK



609 COLONIAL BLUE



504 LINEN




603 ALMOND



532 LATTE

### STANDARD COLORS

\*Delivered in 12-18 Business Days




541 EXTRA WHITE



500 WHITE




585 SAHARA



581 MOSS GREEN



639 SAPPHIRE BLUE



607 BORDEAUX




576 RUBY RED

## SOLID PLASTIC COLOR CARD

\*Delivered in 6-9 Business Days



213 BONE



223 LINEN




239 GRAY



215 BURGUNDY



218 FOSSIL



238 ALMOND



231 SLATE



212 BLUEBERRY



222 HUNTER



225 MOCHA



211 BLACK



227 PAISLEY



217 CANYON GRANITE



219 FROST GRANITE

**Project Title** Stevo Coh - PC W/HDPE showers

**Created By** Rob Fry


**Last edit date** 04/16/2024

**Distributor** Fry Specialty Inc.

**Drawing Title** Womens Toilet Compartment

**Date Printed** 04/16/2024

**Project Number** P0712901

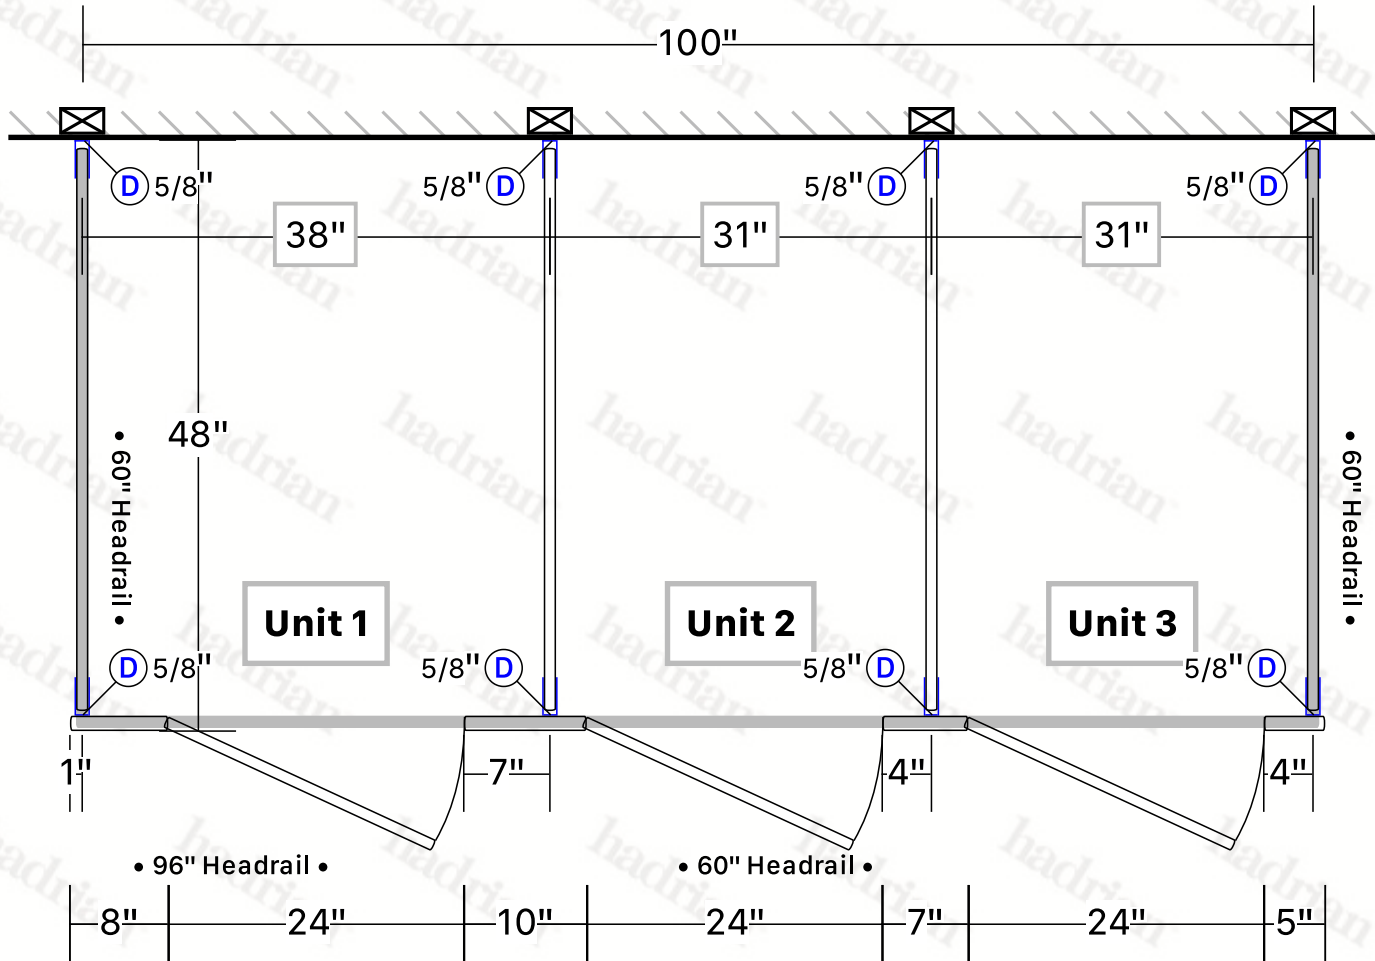

**LEGEND**

(D) 3" Deep Channel

**Unit**

Panel/Door height = 58"  
Panel/Door AFF = 12"

**Product** Toilet Partitions

**Series** Standard

**Sightline Option** Continuous Channels

**Material** Powder Coated

**AFF** 12"

**Hinge** Wrap

**Finish** 535 - Light Grey

**Hardware** Standard Chrome

**Latch** Concealed

**Partition** Headrail Braced

**Options** None

**Project Title** Stevo Coh - PC W/HDPE showers

**Created By** Rob Fry


**Last edit date** 04/11/2024

**Distributor** Fry Specialty Inc.

**Drawing Title** Womens Showers

**Date Printed** 04/11/2024

**Project Number** P0712901

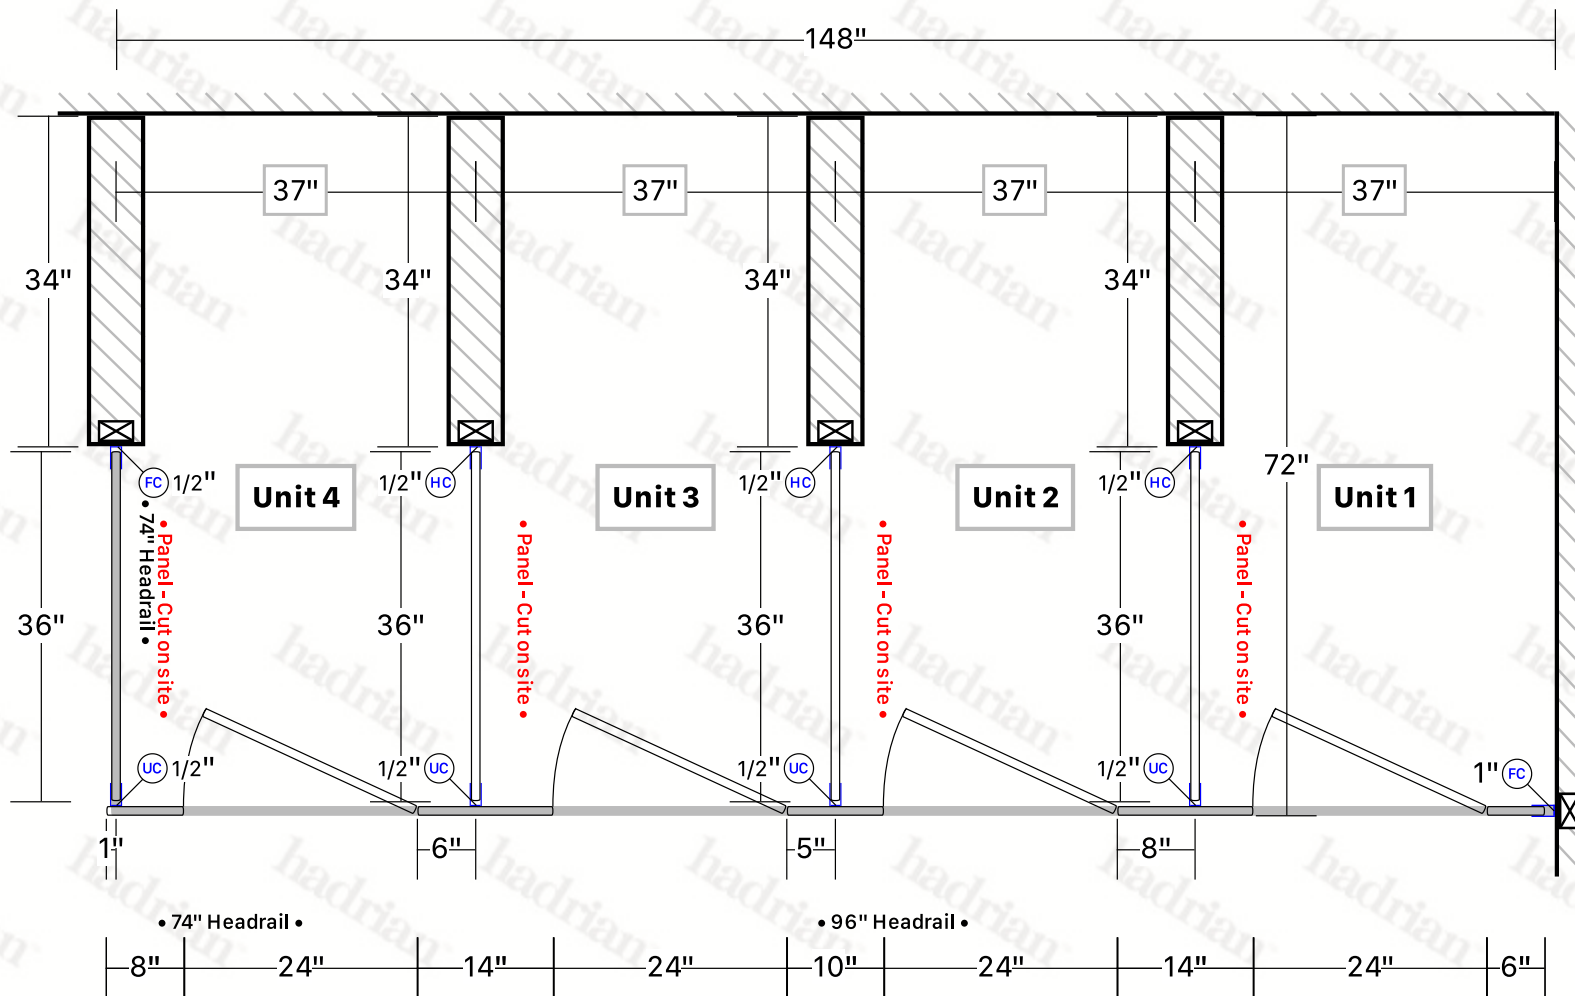

**LEGEND**

(FC) F Channel

(HC) H Channel

(UC) U Channel

**Unit**

Panel/Door height = 55"  
Panel/Door AFF = 14"

**Product** Toilet Partitions

**Series** Standard

**Sightline Option** None

**Material** Solid Plastic

**AFF** 14"

**Hinge** Wrap

**Finish** 219 - Frost Granite

**Hardware** Aluminum Channels

**Latch** Aluminum

**Partition** Headrail Braced

**Options** None

**Project Title** Stevo Coh - PC W/HDPE showers

**Created By** Rob Fry



**Last edit date** 04/16/2024

**Distributor** Fry Specialty Inc.

**Drawing Title** Mens Toilet Compartment

**Date Printed** 04/16/2024

**Project Number** P0712901

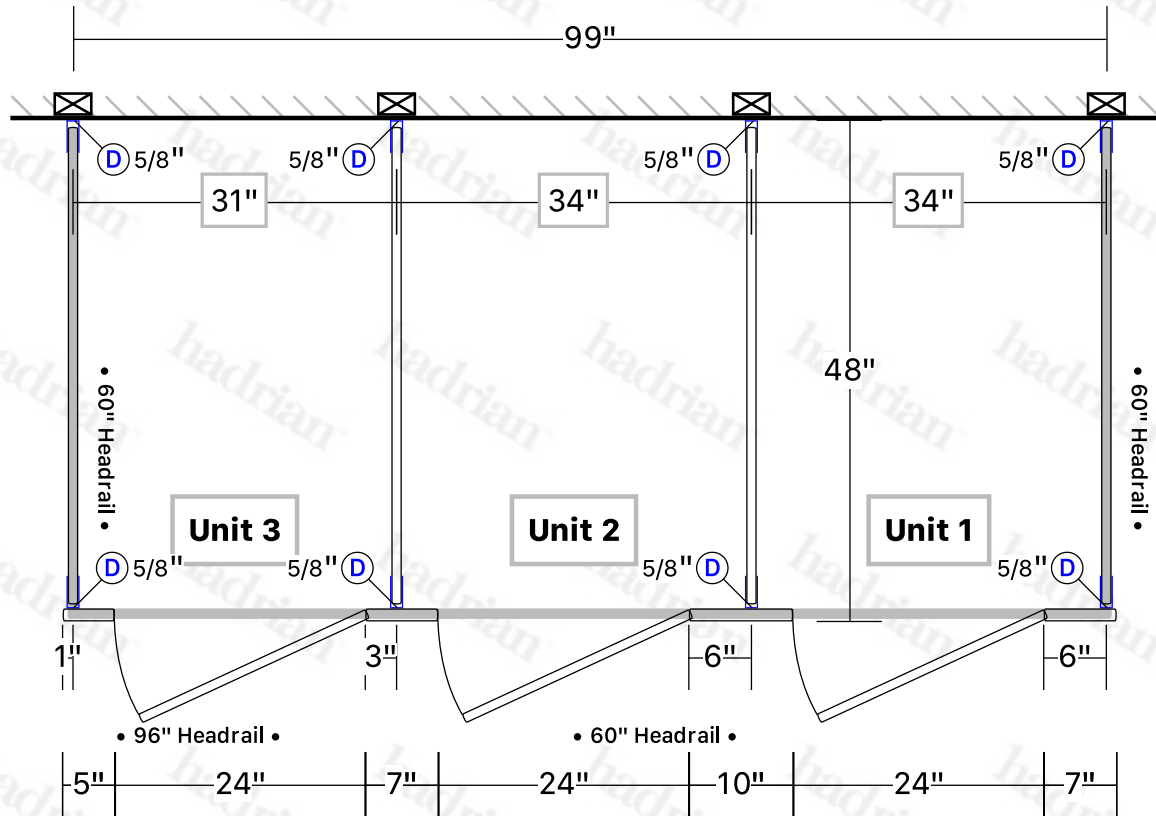

Location of urinal screen(s) may not be correctly reflected in this drawing

**LEGEND**

(D) 3" Deep Channel

(DS) Screen Channel

**Unit**

Panel/Door height = 58"  
Panel/Door AFF = 12"

**Product** Toilet Partitions

**Series** Standard

**Sightline Option** Continuous Channels

**Material** Powder Coated

**AFF** 12"

**Hinge** Wrap

**Finish** 535 - Light Grey

**Hardware** Standard Chrome

**Latch** Concealed

**Partition** Headrail Braced

**Options** None





# Material Specification

## HEADRAIL BRACED - POWDER COATED METAL TOILET PARTITIONS - STANDARD

### 1.01 Construction Features

Doors, Panels and Pilasters shall be constructed of two sheets of panel flatness zinc - coated galvalume steel, ASTM A653 GR33, laminated under pressure to a honeycomb core for sound deadening and rigidity. Formed edges to be welded together and inter - locked under tension with a roll - formed oval crown locking bar, mitred, welded and ground smooth at the corners. Honeycomb to have a maximum 25 mm(1") cell size.

### 1.02 Doors

Shall be 1461mm (57.5") high and 25mm (1") thick with cover sheets not less than 0.8mm (.030").

### 1.03 Panels

Shall be 1461mm (57.5") high and (1") thick with cover sheets not less than 0.8mm (.030").

### 1.04 Pilasters

Shall be 32mm (1.25") thick with cover sheets not less than 0.8mm (.030").

### 1.05 Headrail

Shall be 25mm (1") by 41mm (1.625") extruded anodized aluminum with anti-grip design. Wall thickness to be 1.5mm (.060") and shall be securely attached to wall and pilasters with manufacturer's fittings in such a way as to make a strong and rigid installation. All joints in headrails shall be made at a pilaster.

### 1.06 Pilaster Fastening Method

Pilasters shall be securely and rigidly fastened to the floor and fitted with a jack levelling screw for vertical adjustment. The floor fastening shall be concealed and protected by a 102mm (4") high, die-formed stainless steel pilaster shoe.

### 1.07 Hardware and Fittings

Panel-to-pilaster, panel-to-wall, and pilaster-to-wall connections are made with full-height channels, finished to match partitions.

Fasteners are zinc plated 12 x 1-3/4" and 12 x 5/8" TR-27 6-lobe security screws.

Doors shall be equipped with chrome plated zinc die cast gravity type hinges, mounted on upper and lower pilaster hinge brackets. Threaded top hinge pin shall be metal with a self-lubricating nylon sleeve. Door hinges shall be wrap-around style and adjustable to permit the door to come to rest at any position when not latched.

Coat Hook and Bumper: Each door to be fitted with a combined coat hook and bumper. Finish to match other hardware items.

Latch to be a concealed, chrome plated zinc die casting with face mortised flush with edge strip of door.

The combined stop and keeper shall have a 19mm (0.75") diameter bumper locked in place. Finish to match other hardware items.

Pilaster shoes to be stainless steel with a #4 brushed finish.

### 1.08 Finish

All sheet metal to be thoroughly cleaned, phosphated and finished with a high performance powder coating, baked on to provide a uniform smooth protective finish. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): Womens Toilet Compartment, Mens Toilet Compartment

# Material Specification

## HEADRAIL BRACED - SOLID PLASTIC TOILET PARTITIONS - STANDARD

### 1.01 Construction Features

Doors, panels and pilasters shall be certified Class B polyethylene solid plastic. The material shall contain no foaming agents, which can cause the formation of air pockets. The self-lubricating surface is resistant to marking and can be maintained effectively with ordinary household cleaners. Material is ideal for toilet partition installations, especially in high abuse and high moisture environments.

### 1.02 Doors

Shall be (25mm) 1" thick by (1397mm) 55" high and straight cut with fine radius edges.

### 1.03 Panels

Shall be (25mm) 1" thick by (1397mm) 55" high and straight cut with fine radius edges.

### 1.04 Pilasters

Shall be (25mm) 1" thick by (2083mm) 82" high and straight cut with fine radius edges.

### 1.05 Headrail

Shall be 32mm (1.25") by 44mm (1.75") extruded anodized aluminum with anti-grip design. Wall thickness to be 1.5mm (0.060") and shall be securely attached to wall and pilasters with manufacturer's fittings in such a way as to make a rigid installation. All joints in headrails shall be made at a pilaster.

### 1.06 Pilaster Fastening Method

Pilasters shall be securely and rigidly fastened to the floor with 3" (76mm) high stainless steel anchor shoes. Three heavy-duty aluminum brackets shall be used at the pilaster to wall connection.

### 1.07 Hardware and Fittings

Doors are installed with 1/8" thick heavy extruded clear anodized aluminum hinges, which wrap around both the door and pilaster. Hinges are fastened to door and pilaster with tamper-proof 6-lobe security head stainless steel thru-bolts and fastened to the edge of the door and pilaster with a #10 x 1" screw. Top hinges have adjustable nylon cams.

Strike-keeper and throw latch are extruded clear anodized aluminum.

The combined stop and keeper shall have a 19mm (0.75") diameter bumper locked in place. Finish to match other hardware items.

Doors shall be fitted with a zinc die cast, #4 brushed combined coat hook and bumper. Fasteners are theft-proof 6-lobe security head stainless steel screws. Hadrian door hardware meets ADA and Canadian barrier-free requirements.

Full height aluminum channels are used at the panel to wall, panel to pilaster, and pilaster to wall connections.

### 1.08 Finish

Doors, panels and pilasters shall be certified Class B polyethylene with uniform color throughout. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): Womens Showers, Mens Showers

## **WALL MOUNTED - POWDER COATED METAL URINAL SCREENS - STANDARD**

### **1.01 Construction**

Screens shall be constructed of two sheets of panel flatness zinc-coated galvalume steel, ASTM A653 GR33, laminated under pressure to a honeycomb core for sound deadening and rigidity. Formed edges to be welded together and inter-locked under tension with a roll-formed oval crown locking bar, mitred, welded and ground smooth at the corners. Honeycomb to have a maximum 25mm (1") cell size.

### **1.02 Wall Mounted**

Screens shall be 25mm (1") thick with cover sheets not less than 22-gauge (0.8mm / .030"). Screens shall be 457mm (18") or 610mm (24") deep by 1219mm (48") high and anchored into the wall approximately 305mm (12") off the floor.

### **1.03 Hardware & Fittings**


Screens shall be fastened to the wall with full-height double ear channels that are extruded aluminum in a clear anodized finish. Fasteners are theft-proof 6-lobe security head zinc plated screws.

### **1.04 Finish**

All sheet metal to be thoroughly cleaned, phosphated and finished with a high performance powder coating, baked on to provide a uniform smooth protective finish. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): Mens Toilet Compartment

**Metal Toilet Partitions**  
**Standard Series - Headrail Braced - 12" [305mm] AFF**  
**Chrome - Concealed Latch & Wrap Hinge**  
**Channels**

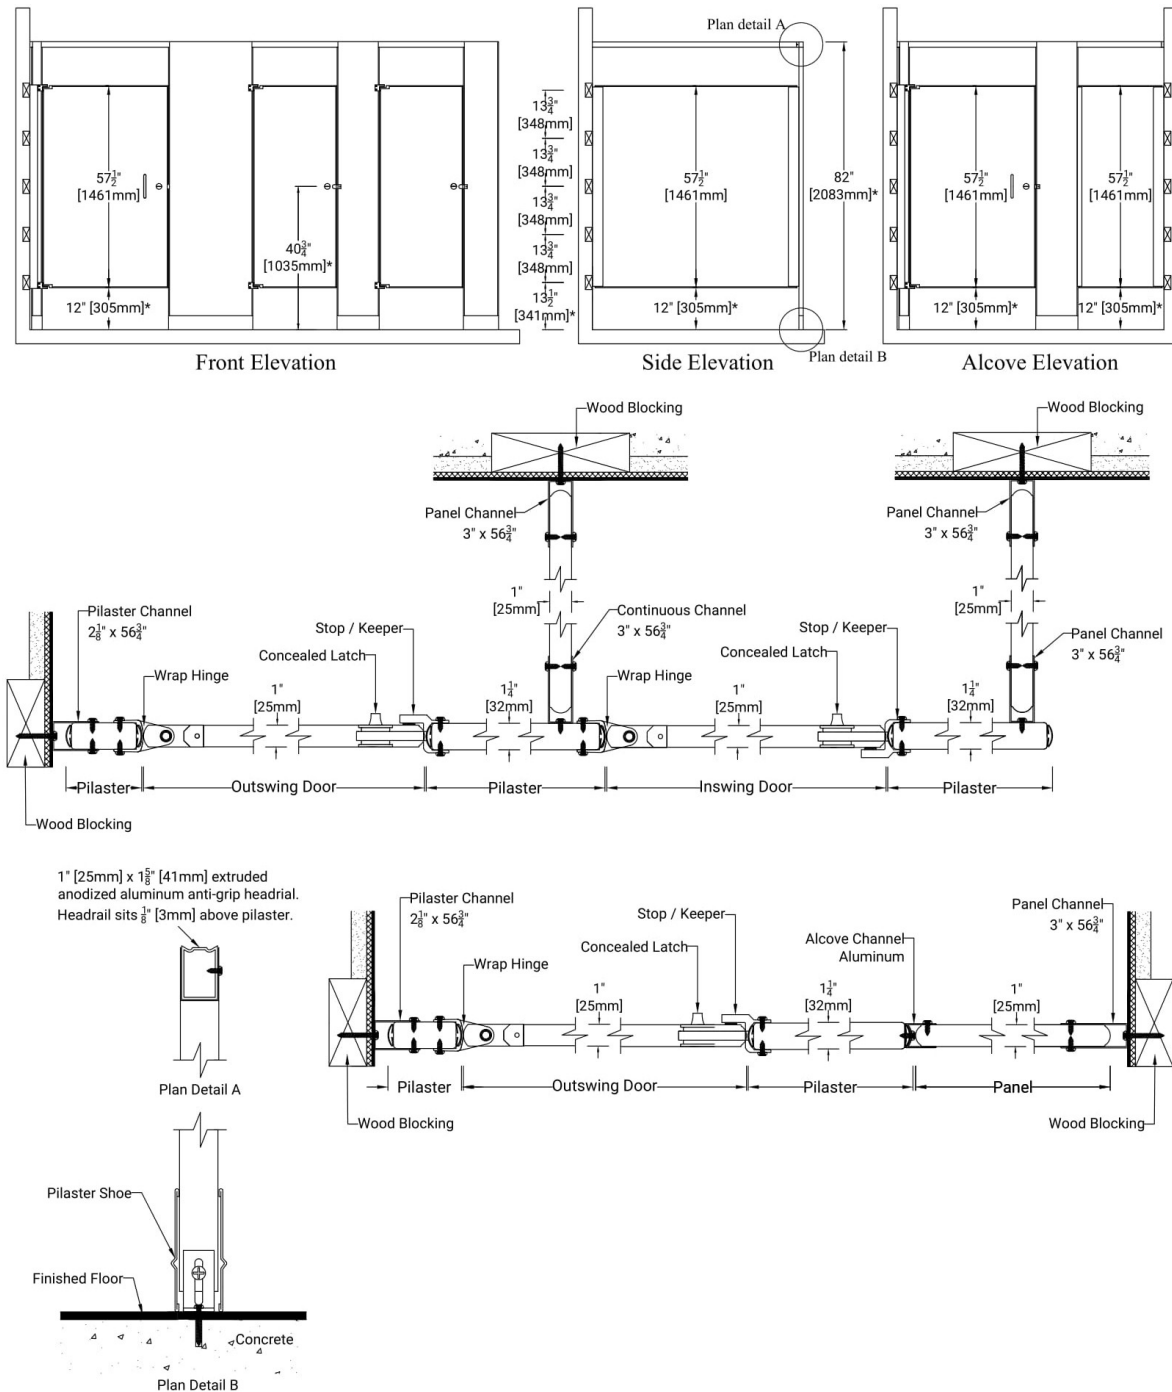


**Important Notes:**

Refer to final drawings for wood blocking information. Wood blocking is critical to ensure a rigid installation. See material specifications for material and hardware finishes.

\*Above finish floor dimensions may vary due to floor level and cam position

**Plastic Toilet Partitions**  
**Standard Series - Headrail Braced - 14" [356mm] AFF**  
**Aluminum Channels - Aluminum Surface Latch & Wrap Hinge**

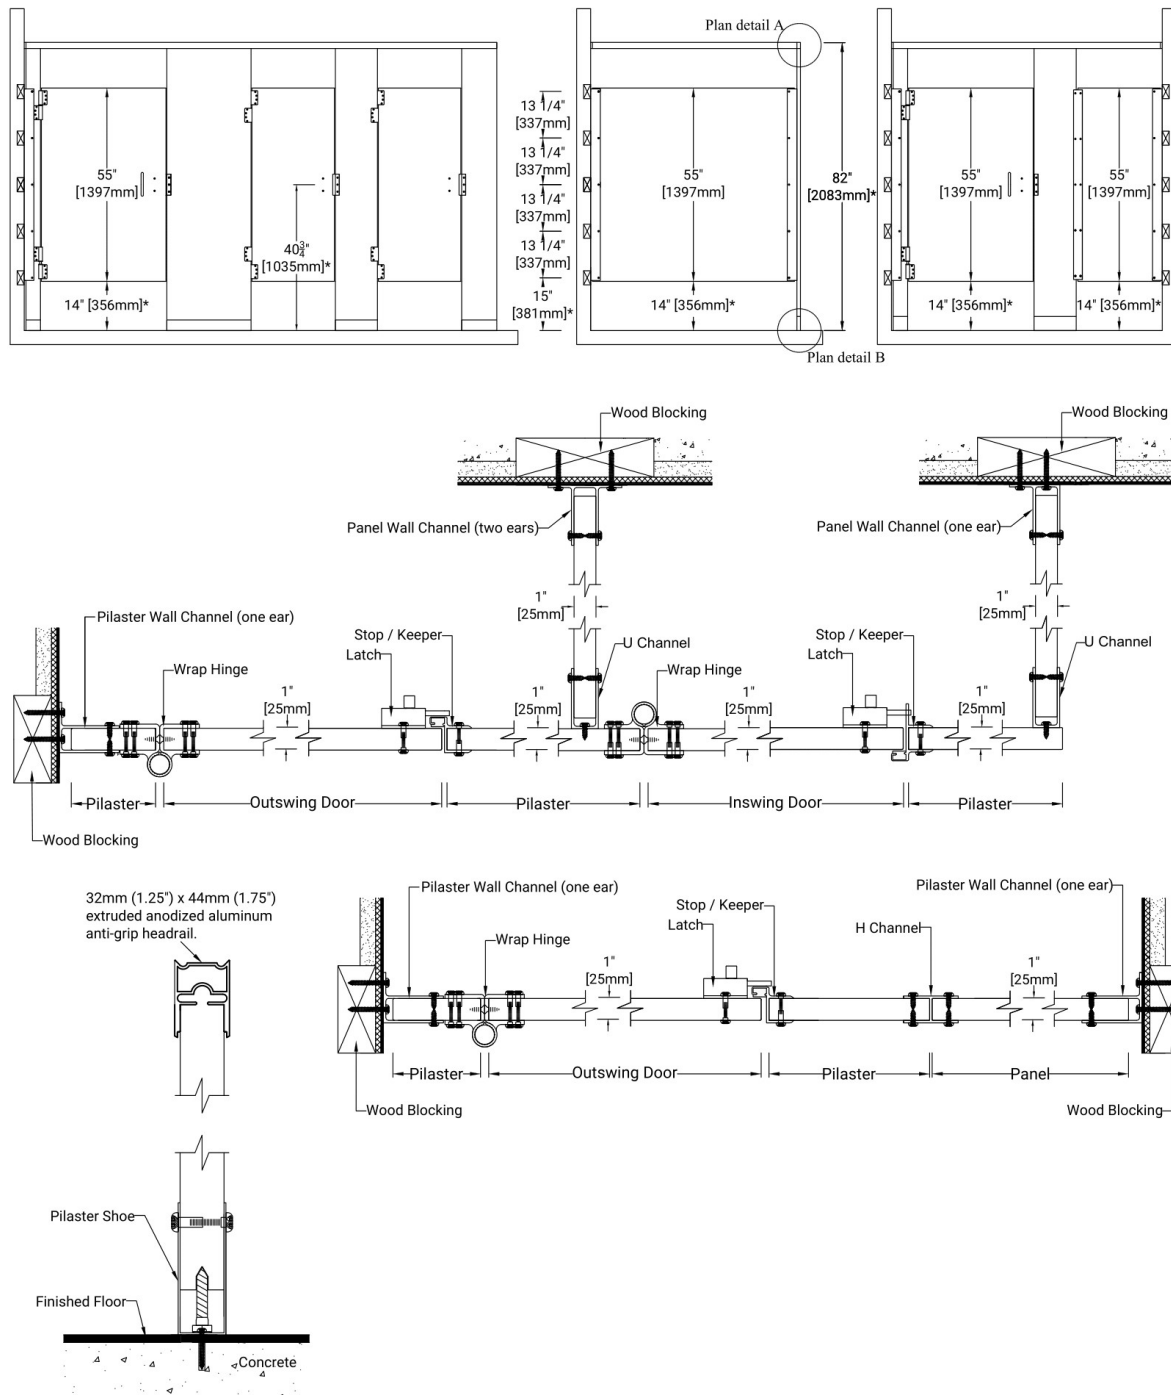

**Important Notes:**

Refer to final drawings for wood blocking information. Wood blocking is critical to ensure a rigid installation. See material specifications for material and hardware finishes.


\*Above finish floor dimensions may vary due to floor level and cam position

## Metal Urinal Screens

Standard Series - Wall mounted

12" [305mm] AFF

### Continuous Channel Installation

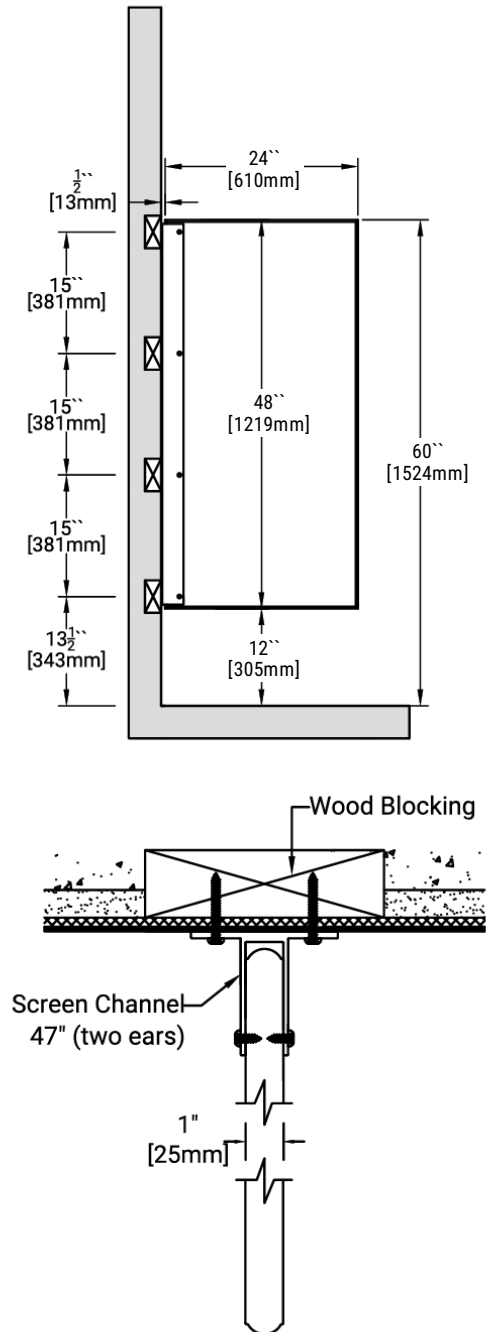

#### Available Panel Depths

18" [457mm]

24" [610mm]

## Warranty Information

Hadrian Manufacturing Inc. ("Hadrian") provides the following warranty with respect to the Hadrian product(s) supplied for the project indicated above.

Subject to the terms set out herein, the product(s) are warranted against defects in material and workmanship from the date of receipt by the authorized Hadrian distributor for the warranty period outlined below:

Powder Coated Toilet Partitions	3 years
Stainless Steel Toilet Partitions	5 years
Solid Plastic Toilet Partitions	25 years
Phenolic Black Core Toilet Partitions	25 years
Emperor (corridor) Lockers	2 years
Gladiator (athletic) Lockers	5 years
Replacement Front Lockers	2 years
Boot Racks	1 year

The warranty is for Hadrian material only and excludes damages caused by installation errors, vandalism, improper usage, improper maintenance, exposure to harsh environments or chemicals (such as chlorine, bromine, etc.) or failure of the building structure to adequately support the product. Site preparations (i.e. wood blocking, etc.) must meet final drawing specifications and Hadrian's recommended maintenance procedure must be followed.

The exclusive remedy under this warranty shall, at Hadrian's discretion, be replacement or repair of the defective material. Hadrian will not pay any removal, installation or other labor costs associated with the repair or replacement. Replacement material will be warranted for the unused portion of the original warranty period.

No warranty of merchantability or fitness for a particular purpose is made or implied. In no event shall Hadrian be liable for any other costs or damages, including loss of profit, loss of revenue, indirect, incidental, special or consequential damages howsoever arising, whether under warranty, contract, statute, tort, equity or otherwise.

This warranty extends only to the original authorized Hadrian customer and is non-transferable. Warranty claims must be made during the applicable warranty period and initiated by contacting Hadrian at the following coordinates: USA: 440-942-9118 / CANADA: 905-333-0300.

The foregoing constitutes the entire warranty given by Hadrian and no one is authorized to change or expand this warranty on behalf of Hadrian.



**Hadrian Manufacturing Inc.**, 965 Syscon Road, Burlington, ON, L7L 5S3 T: 905-333-0300 F: 905-333-1841

**Hadrian Manufacturing Inc.**, 2550 - 61 Avenue SE, Calgary, AB, T2C 4V2 T: 905-333-0300 F: 905-333-1841

**Hadrian Inc.**, 7420 Clover Avenue, Mentor, OH, 44060 T: 440-942-9118 F: 440-942-9618

**Hadrian Inc.**, 3602 West Washington Street, Suite 200, Phoenix, AZ, 85009 T: 440-942-9118 F: 440-942-9618

08/2023

# Maintenance Procedure

## FOR POWDER COATED PAINTED FINISH

### **MAINTENANCE OF YOUR TOILET PARTITIONS SHOULD BE A PART OF YOUR REGULAR BUILDING PREVENTIVE MAINTENANCE PROCEDURE**

1. Tighten any screws that have become loose due to vibrational forces or attempted vandalism.
2. Check the top door pin to be sure it is flush with the top of the hinge.
3. Be sure the surfaces are dry after being cleaned and rinsed with clear water (when required).
4. Partitions exposed to severe humidity should be washed and dried frequently. If partitions are in a shower room, a coat of paste wax is recommended on painted surfaces.
5. Periodically, remove any dirt, grime or foreign matter with a soft cloth.
6. Where surfaces reveal spotting resulting from hand perspiration, soil, or grease, a thorough cleaning with warm water and a mild detergent (ie. Ivory Soap), followed by rinsing, and removal of excess moisture, will renew the clean even surface, providing a pleasant sanitary appearance. (Use of cleaning agents containing abrasives such as household cleaning powder, steel wool, and harsh detergents or acids ARE NOT RECOMMENDED).
7. To maintain the brilliance of hardware, these components can be periodically improved by an application of non-abrasive cleaner with a damp cloth.
8. Where additional gloss and protection is desirable, light applications of commercial liquid or paste waxes are highly recommended.
9. If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.



# Maintenance Procedure

## FOR SOLID PLASTIC

### **MAINTENANCE OF YOUR TOILET PARTITIONS SHOULD BE A PART OF YOUR REGULAR BUILDING PREVENTIVE MAINTENANCE PROCEDURE**

1. Tighten any screws that have become loose due to vibrational forces or attempted vandalism.
2. Be sure the surfaces are dry after being cleaned and rinsed with clear water (when required).
3. Partitions exposed to severe humidity should be washed and dried as needed.
4. Periodically, remove any dirt, grime or foreign matter with a soft cloth.
5. Where surfaces reveal spotting resulting from hand perspiration, soil, or grease, a thorough cleaning with warm water and a mild detergent (i.e. Ivory Soap), followed by rinsing, and removal of excess moisture, will renew the clean even surface, providing a pleasant sanitary appearance. (Use of cleaning agents containing abrasives such as household cleaning powder, steel wool, and harsh detergents or acids ARE NOT RECOMMENDED).
6. For areas of stubborn graffiti, commercial graffiti removers can be used.
7. To maintain the brilliance of hardware, these components can be periodically improved by an application of non-abrasive cleaner with a damp cloth.
8. If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.
9. The appearance of scratches may be minimized by burnishing the blemish with a smooth, rounded object such as a spoon. For best results, apply slight pressure in a parallel motion to the scratch.