



Estimate

ADDRESS
MADE 4U SPECIALTIES
ATTN: MICHAEL PERKINS
RE: SIERRA SPRINGS

SHIP TO
Valued Customer
Project address: TBA

ESTIMATE 11494
DATE 06/18/2024

SALES REP
CHRISTINA 619-635-2888

ITEM	DESCRIPTION	QTY
MATERIAL-EXPENSE	PLASTIC LAMINATE BY BOBRICK PER ATTACHED	
STYLE	FLOOR MOUNTED/OVERHEAD BRACED	
HARDWARE	HARDWARE INCLUDED PER ATTACHED	
COLOR	6212-58-WHEAT STRAND	
STALLS	INCLUDED IN PROPOSAL	5
CAN SHIP IN	APPROX. 6 WEEKS	
STANDARD FREIGHT INCLUDED	BASED ON (1) SINGLE SHIPMENT TO 89118	
	*** SALES TAX WILL BE ADDED IF SHIPPING TO CA, TN, TX, OK, NY, FL, GA, MA, NJ, WA, AZ, MI, MN, NC, VA, IL AND MD.	

• QUOTES ARE VALID FOR 30 DAYS
• QUANTITIES & DESCRIPTIONS NOT GUARANTEED TO AGREE WITH PLANS AND/OR SPECS. IT IS YOUR RESPONSIBILITY TO REVIEW ENTIRE QUOTE/SUBMITTAL PRIOR TO BIDDING YOUR PROJECT. YOU ARE ALSO RESPONSIBLE FOR VERIFYING LOCAL MUNICIPALITY / CODE COMPLIANCE.
ANY CHANGES MADE CAN IMPACT PRICING.

SUBTOTAL	3,245.00
TAX (0%)	0.00
TOTAL	\$3,245.00

Accepted By

Accepted Date

BOBRICK**Technical Data**

ClassicSeries®

High Pressure Laminate Partitions and Screens


1540 SERIES

Specify Product Application:

- ☐ Toilet Partitions
- ☐ With Outswing Door
- ☐ Urinal Screens

Specify Series Required:

- ☐ 1541 Series Floor-Anchored
- ☐ 1542 Series Overhead-Braced
- ☐ 1545 Series Wall-Hung Urinal Screens
- ☐ 1548 Series Ceiling-Hung for 8' (244cm) Ceiling or as required up to 10' (308cm) Ceiling.

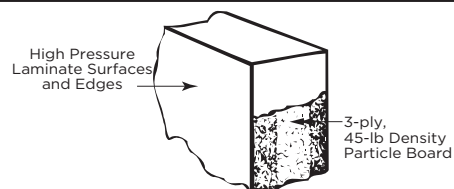**STANDARD-SIZE COMPONENTS:**

Stiles: For compartments - 3", 4", 5", 6", 7", 8"a, 10", 12", 16", 18", 20", or 24" (8, 10, 13, 15, 18, 20, 25, 30, 41, 46, 51, or 61cm) wide; for screens - 6" (15cm) wide. **Floor-anchored** - 69" (175cm) high; **overhead braced** - 82-5/16" (209cm) high; **ceiling-hung** - 83" (211cm) high for 8' (244cm) ceilings or as required up to 10' (305cm) ceilings.


Doors: 58" (147cm) high. *Inswing doors* are standard for 22" to 37" (56-94cm) widths in whole-inch increments. *Outswing*^b doors are standard for 25" to 37" (64-94cm) widths in whole-inch increments.

Wall Posts: 1-1/2" wide, 58" high (4 x 147cm).

Panels: For Compartments - Up to 84" (213cm) wide; 58" (147cm) high. For wall-hung screens - 42" or 48" (107 or 122cm) high; 18" or 24" wide (46 or 61cm). For ceiling-hung and floor-anchored screens - 58" (147cm) high; 24", 36", 48", or 60" (61, 91, 122, or 152cm) wide.

^a Minimum 8" (20cm) wide stile recommended for ceiling-hung and flooranchored compartments.


^b Use outswing doors to comply with local codes requiring access for physically disabled persons.

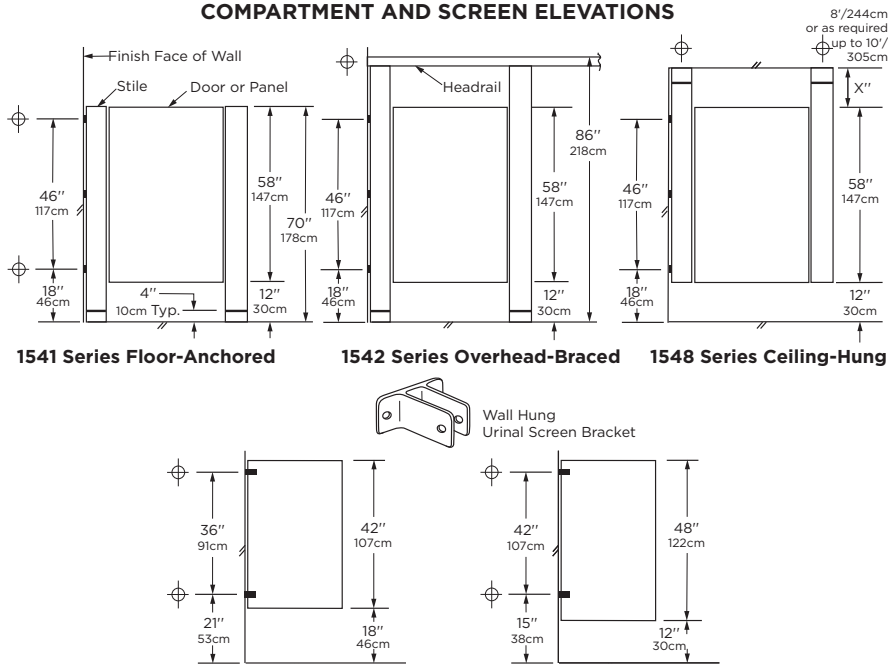COMPARTMENT AND SCREEN ELEVATIONS**TYPICAL HARDWARE DETAILS**


Standard gaps are provided at all walls and between components to allow for hardware attachment.

Wall gaps are standard 1/2" to 1"



Through-Bolted, Bright-Polished, Chrome-Plated Zamak (standard on all compartments)

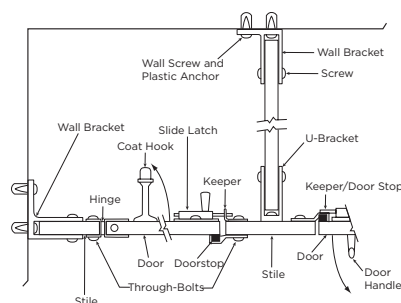**TYPICAL INSTALLATION DETAILS**

Floor-Anchored or Ceiling-Hung Leveling Device (Ceiling Leveling Device Shown)



Overhead-Braced Floor Leveling Device

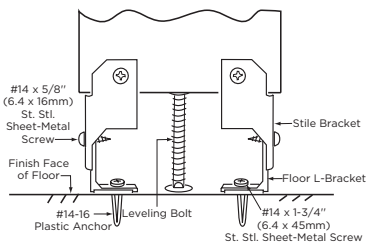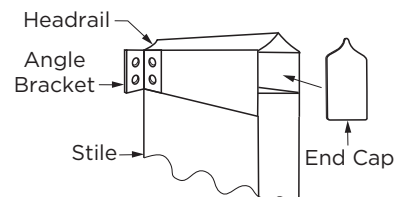**Overhead-Bracing**

MATERIALS:

Stiles — 1" (25mm) finished thickness: 3-ply, 45-lb (20.4-kg) density, resin-impregnated particle board; surfaces and edges are .050" (1.3mm) thick, high-pressure plastic laminate with colored face sheets and matte finish.

Leveling Device — Overhead-Braced Series: 12-gauge (2.8mm), 3" x 1-1/4" (75 x 32mm) plated steel stile bracket factory installed to bottom of stile. Furnished with leveling bolt, shoe retainer, floor L-bracket, plastic anchor #14-16, #14 x 5/8" (M6.3 x 16mm) stainless steel sheet-metal screws and #14 x 1-3/4" (M6.3 x 45mm) stainless steel sheet-metal floor screws.

Leveling Device — Floor-Anchored or Ceiling-Hung: 3/8" x 1" (10 x 25mm) steel bar, zinc-chromate plated, bolted to stile using 6" x 3/8" (152 x 10mm) diameter carbon steel lag bolt. Furnished with 3/8" (10mm) diameter threaded rods, hex nuts, washers, spacer sleeve (ceiling-hung only), expansion shield and shoe retainer.

Shoe: — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish; 4" (102mm) high. Patented one-piece shoe is open-ended, and may be mounted blind against wall using shoe clip fastener on wall side.

Panels and Doors — 1" (25mm) finished thickness: 3-ply, 45-lb (20.4-kg) density, resin-impregnated particle board; surfaces and edges are .050" (1.3mm) thick, high-pressure plastic laminate with colored face sheets and matte finish.

Headrail: (1542 Series Only): Extruded anodized aluminum. Enclosed construction with vandal-resistant sloping top.

Wallpost: 1-1/2" (38mm) x 1" (25mm) x 58" (147cm), 16 gauge (1.6mm) thick, 18-8, Type-304 stainless steel. Pre-drilled for door mounting hardware.

Door and Mounting Hardware — Hinges, door latches, door keepers, coat hooks, and mounting brackets are constructed of chrome-plated zamak. Toilet compartment door is locked from inside by sliding door latch into keeper. A locked compartment may be opened from outside by lifting door to disengage latch from keeper. Doorstop prevents inswing door from swinging out beyond stile; on outswing door, the doorstop/keeper prevents it from swinging in beyond stile. Combination coat hook and bumper reduces damage from door inside compartment.

INSTALLATION:

Bobrick installation instructions are packed with each shipment and are available also in advance on request.

Notes:

1. Where water from showers or hose-down cleaning comes in contact with partitions, Bobrick 1080 Series water-resistant, solid phenolic partitions are recommended.
2. Ceiling-hung partitions require structural members (not furnished by Bobrick) in ceiling. For suggested types of ceiling support systems, see Bobrick Advisory Bulletin TB-32.
3. Wall backing is required to secure the mounting brackets of panels, stiles, and wall posts. For suggested wall backing, see Bobrick Advisory Bulletin TB-46.
4. Floor-anchored stiles are furnished with expansion anchors and threaded rods. The expansion anchors require minimum 2" (50mm) penetration into minimum 3" (75mm) thick structural concrete.
5. Bobrick stainless steel partition-mounted washroom accessories are available for mounting in panels between two compartments. See current Bobrick Catalog for description of accessories. Cutouts in panels can be pre-cut for Bobrick models at factory if location and size of all cutouts and Bobrick model numbers are furnished at time of order.

GUARANTEE:

The Bobrick toilet partition panels, doors and stiles are warranted for a period of 2 years against breakage, corrosion, delaminating and defects in workmanship from the date of purchase for the periods set forth (this limited warranty is conditioned on the toilet partitions being properly installed, used and serviced). Spraying down or hosing HPL partitions voids warranty. Any products returned to Bobrick under this guarantee will be repaired or replaced at no charge.

SPECIFICATION:


High pressure laminate _____ (insert one: toilet partitions or urinal screens) shall be _____ (insert one: floor-anchored, ceiling-hung, overhead-braced or wall-hung). Stiles, panels, and doors shall have a finished thickness of 1" (25mm). Core of panels, doors, and stiles* shall be 3-ply, 45-lb (20.4-kg) density, resin-impregnated particle board. Stiles shall have a one-piece, Type-304, satin-finish stainless steel shoe that is 4" (102mm) high. Surfaces and edges shall be .050" (1.3mm) thick, high pressure laminate with colored face sheets and matte finish; bonding shall be done using adhesives especially formulated to prevent delamination from moisture and heat normally existing in public washrooms. Stiles, panels, and doors shall be _____ (insert color name and number from current Bobrick Catalog). Headrails for overhead-braced compartments shall be anodized aluminum with satin finish. All door hardware and mounting brackets shall be chrome-plated zamak**. Theft-resistant, one-way screws shall be furnished for all door hardware. Plated-steel Phillips screws shall be furnished for all mounting brackets. A coat hook shall be furnished for each door.

_____ (insert one: Toilet Partitions, Dressing Compartments, Urinal Screens) shall be _____ Series (insert series number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

HEIGHT	COLOR SELECTION	DISTRIBUTOR	35205 - FRY SPECIALTY INC	Note: Dimensions are in inches
PANEL 58	6212-58-Wheat Strand	QUOTE#/S.O.#	9128895-1	
STILE 81 15/16	6212-58-Wheat Strand	P.O.#		
DOOR 58	6212-58-Wheat Strand	DATE	6/18/2024	
		JOB NAME	SIERRA SPRINGS	
		ROOM	Mens	

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 12

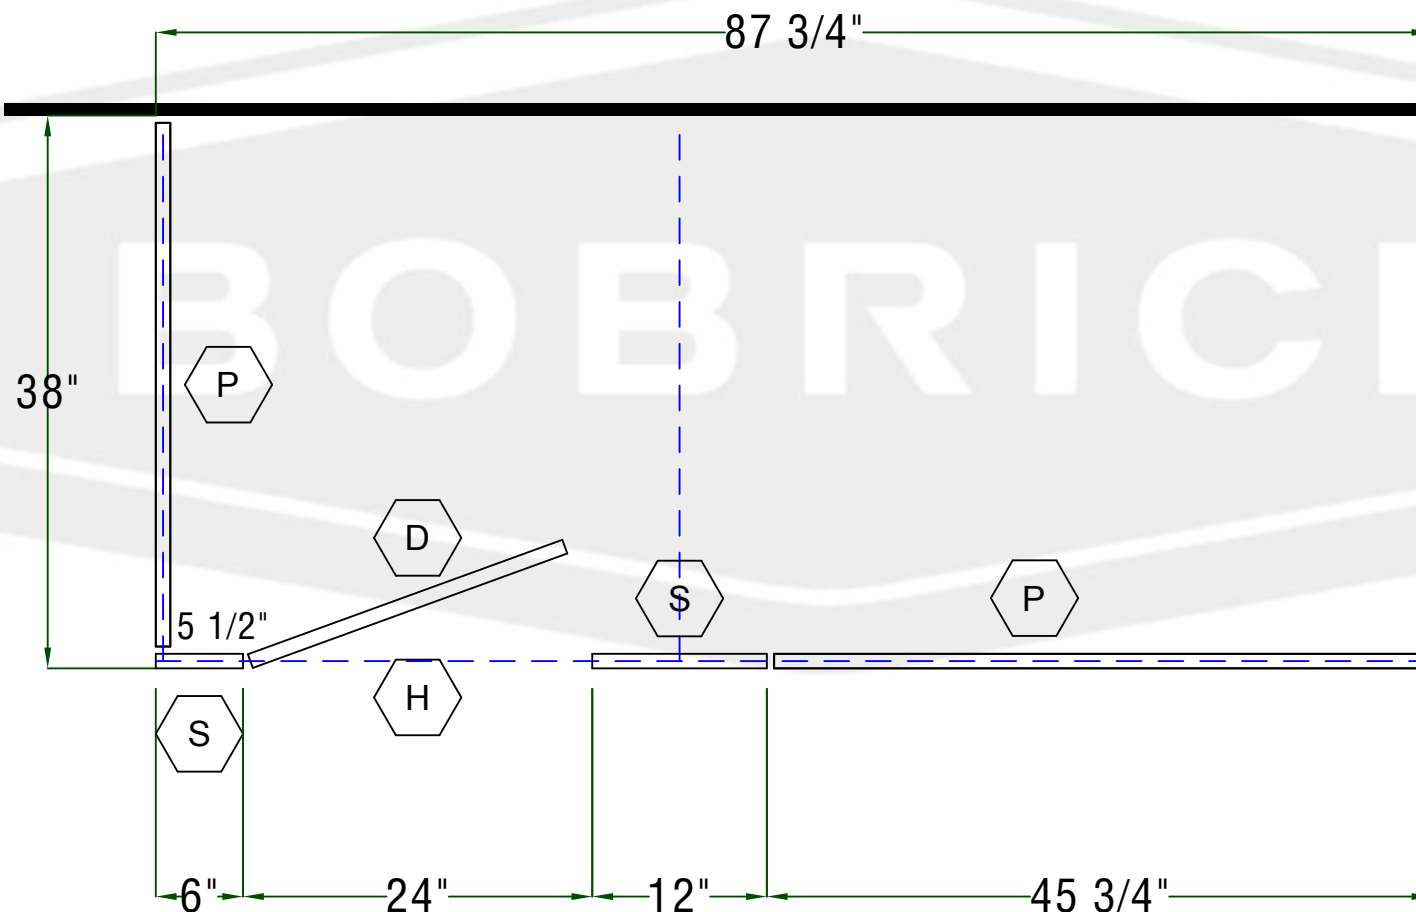

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 3/4" FROM WALL TO PANEL
PLUS 1/4" PANEL TO STILE
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

STILE WALLPOST DOOR PANEL HEADRAIL BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED _____



CLASSIC

Series: 1542

Type: Overhead Braced


Layout: Recessed Standard 1 stall

2 Of 4

HEIGHT		COLOR SELECTION	DISTRIBUTOR	35205 - FRY SPECIALTY INC	Note: Dimensions are in inches	
PANEL	58	6212-58-Wheat Strand	QUOTE#/S.O.#	9128895-1		
STILE	81 15/16	6212-58-Wheat Strand	P.O.#			
DOOR	58	6212-58-Wheat Strand	DATE	6/18/2024		
			JOB NAME	SIERRA SPRINGS		
			ROOM	Mens		

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 12

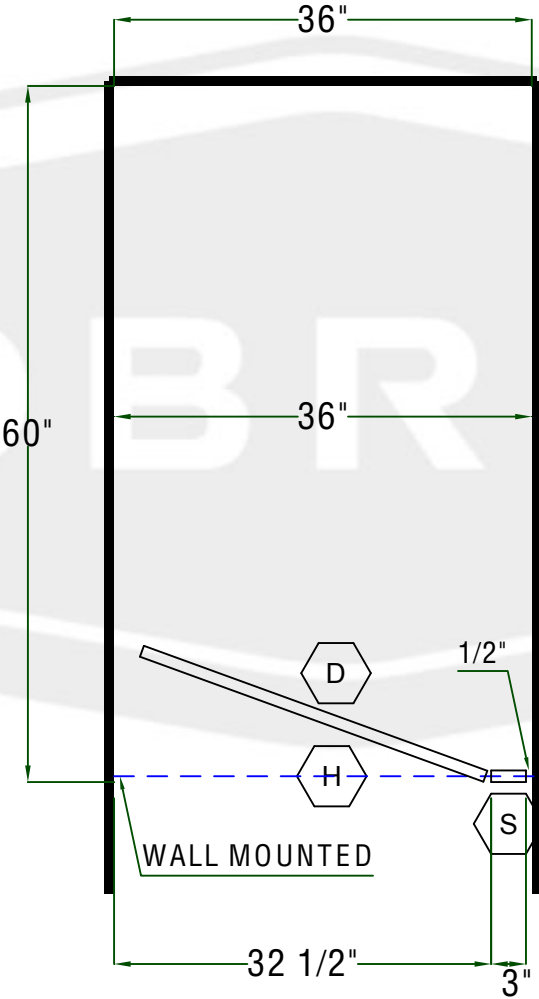

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 3/4" FROM WALL TO PANEL
PLUS 1/4" PANEL TO STILE
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

STILE WALLPOST DOOR PANEL HEADRAIL BENCH


EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN
BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY.
PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED _____

HEIGHT	COLOR SELECTION	DISTRIBUTOR	35205 - FRY SPECIALTY INC	Note: Dimensions are in inches
PANEL 58	6212-58-Wheat Strand	QUOTE#/S.O.#	9128895-1	
STILE 81 15/16	6212-58-Wheat Strand	P.O.#		JOB NAME SIERRA SPRINGS
DOOR 58	6212-58-Wheat Strand	DATE	6/18/2024	ROOM Womens

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 12

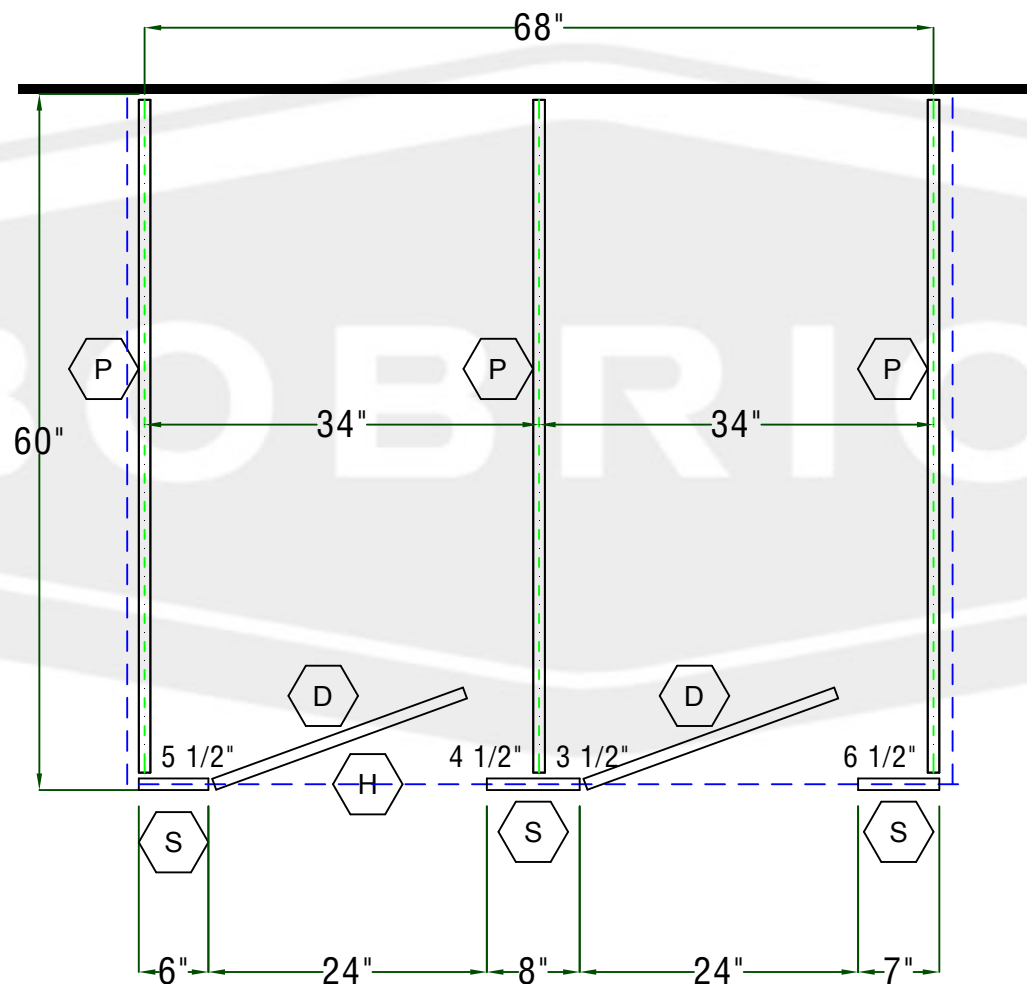

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 3/4" FROM WALL TO PANEL
PLUS 1/4" PANEL TO STILE
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

S STILE
 W WALLPOST
 D DOOR
 P PANEL
 H HEADRAIL
 B BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED _____



CLASSIC

Series: 1542

Type: Overhead Braced


Layout: Recessed Standard 1 stall

4 Of 4

HEIGHT	COLOR SELECTION	DISTRIBUTOR	35205 - FRY SPECIALTY INC	Note: Dimensions are in inches
PANEL 58	6212-58-Wheat Strand	QUOTE#/S.O.#	9128895-1	
STILE 81 15/16	6212-58-Wheat Strand	P.O.#		
DOOR 58	6212-58-Wheat Strand	DATE	6/18/2024	
		JOB NAME	SIERRA SPRINGS	
		ROOM	Womens	

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 12

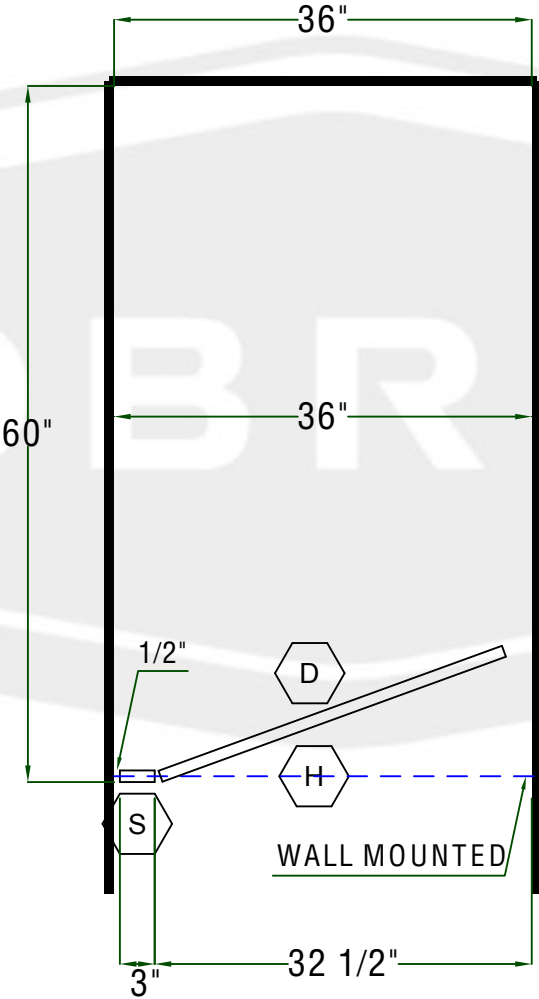

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 3/4" FROM WALL TO PANEL
PLUS 1/4" PANEL TO STILE
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

STILE WALLPOST DOOR PANEL HEADRAIL BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN
BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY.
PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED _____



STANDARD HIGH PRESSURE LAMINATE COLORS

DESIGNER WHITE D354-60					
WHITE CARRARA 4924-38					
ANTIQUE WHITE 1572-60					
NATURAL ALMOND D30-60					
BEIGE 1530-60					
GREY 1500-60					
PLATINUM D315-60					
DESERT ZEPHYR 4841-60					
NATURAL CANVAS 7022-58					
GREY NEBULA 4622-60					
PEWTER MESH 4878-38					
EVENING TIGRIS 4674-60					
NATURAL TIGRIS 4669-60					
WHEAT STRAND 6212-58					
SLATE GREY D91-60					
SHADOW D96-60					
TUNGSTEN EV 4814-60					
SPICED ZEPHYR 4859-60					
WINDSWEPT BRONZE 4794-60					
BURNT STRAND 6307-58					
GRAPHITE NEBULA 4623-60					
GREEN TIGRIS 4667-60					
CHESTNUT WOODLINE 5884-58					
CHOCOLATE WARP 5881-58					
NAVY GRAFIX 7018-58					
BRITTANY BLUE D321-60					
SMOKEY BROWN PEAR 5488-58					
FIGURED MAHOGANY 7040A-60					
SPECTRUM BLUE 851-58					
HOLLYBERRY D307-60					
BASALT SLATE 3690-58					
BLACK 1595-60					

Panels over 60" wide with directional patterns and finishes will require splicing, or inline pilasters, at an additional charge.

Colors are a printed reproduction of colors, and for descriptive purposes only.
Refer to manufacturer samples for absolute color fidelity.
Physical samples are available upon request.