



Estimate

ADDRESS
STARLITE BUILDING SERVICES
ATTN: CHELSEA CHADURJIAN
RE: BU WARREN TOWERS

SHIP TO
Valued Customer
Project address: 02127

ESTIMATE 11498
DATE 09/05/2024

SALES REP
CHRISTINA 619-635-2888

ITEM	DESCRIPTION	QTY
MATERIAL-EXPENSE	SCRC/SIERRA SERIES BY BOBRICK PER ATTACHED (SERIES DETAIL ON DRAWINGS)	
STYLE	FLOOR MOUNTED/OVERHEAD BRACED	
HARDWARE	HARDWARE INCLUDED PER ATTACHED	
COLOR	SC04-QZ-FOREST GREEN	
STALLS	INCLUDED IN PROPOSAL	4
SCREENS	INCLUDED IN PROPOSAL	1
CAN SHIP IN	APPROX. 4 WEEKS (SUBJECT TO CHANGE WITHOUT NOTICE)	
STANDARD FREIGHT INCLUDED	BASED ON (1) SINGLE SHIPMENT TO 02127	
	*** SALES TAX WILL BE ADDED IF SHIPPING TO CA, TN, TX, OK, NY, FL, GA, MA, NJ, WA, AZ, MI, MN, NC, VA, IL AND MD.	

• QUOTES ARE VALID FOR 30 DAYS
• QUANTITIES & DESCRIPTIONS NOT GUARANTEED TO AGREE WITH PLANS AND/OR SPECS. IT IS YOUR RESPONSIBILITY TO REVIEW ENTIRE QUOTE/SUBMITTAL PRIOR TO BIDDING YOUR PROJECT. YOU ARE ALSO RESPONSIBLE FOR VERIFYING LOCAL MUNICIPALITY / CODE COMPLIANCE.
ANY CHANGES MADE CAN IMPACT PRICING.

SUBTOTAL	8,000.00
TAX (0%)	0.00
TOTAL	\$8,000.00

Accepted By

Accepted Date



Technical Data

SierraSeries®

Solid Color Reinforced Composite Partition and Screens

1090 SERIES

SPECIFICATION

Height: 58" (1473mm) Doors and Panels with 12" (305mm) Floor Clearance

MATERIAL

Stiles* — 3/4" (19mm) thick, SCRC with GraffitiOff™ surface thermoset and integrally fused into one homogenous piece. Surface, edge, core are to be the same color. *Stiles for 1096 Series floor-to-ceiling anchored units have a leveling device at each end.

Standard Size Stiles:

- For compartments — 3", 4", 5", 6", 7", 8", 10", 12", 16", 18", 20", or 24" (76, 102, 127, 152, 179, 203, 254, 305, 406, 457, 508, 610mm) wide.
- For screens — 6" (152mm) wide.
- Floor-anchored — 69" (1753mm) high.
- Overhead-braced — 83" (2108mm) high.
- Floor-to-ceiling anchored — Up to 120" (3048mm) ceiling height.
- Ceiling-hung — 83" (2108mm) high for 96" (2438mm) ceilings or as required up to 120" (3048mm) ceilings.

Panels — 1/2" (13mm) thick, SCRC with GraffitiOff™ surface thermoset and integrally fused into one homogeneous piece. Surface, edge, core are to be the same color.

Standard Size Panels:

- For compartments — Up to 84" (2134mm) wide; 58" (1473mm) high.

Urinal Screens — 1/2" (13mm) thick, SCRC with GraffitiOff™ surface thermoset and integrally fused into one homogeneous piece. Surface, edge, core are to be the same color.

Standard Size Urinal Screens:

- For wall-hung screens — Up to 24" (610mm) wide; 42" to 54" (1067 to 1372mm) high.
- For ceiling-hung, floor anchored and post-to-ceiling screens — Up to 60" (1524mm) wide; 58" (1473mm) high.

Doors — 3/4" (19mm) thick, SCRC with GraffitiOff surface thermoset and integrally fused into one homogeneous piece. Surface, edge, core are to be the same color.

Standard Size Doors:

- Inswing and outswing doors are standard 22" to 37" (559 to 940mm) wide; 58" (1473mm) high.

Edges SCRC is a natural material comprised of wood chips, dyes and resins with a melamine surface. Edges lack a melamine surface and may discolor in environments with significant UV lighting. Discoloration of edges, should it occur, is not covered under warranty.

Posts (for 1093 Series screens only) — 1 1/4" (32mm) square tubing; 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish. Floor and ceiling connections are constructed of 18-8, Type-304, heavy-gauge stainless steel. Furnished in 120" (3048mm) lengths; to be cut in field to job specifications.

Standard Size Post:

- For 1093 Series post-to-ceiling screens only. 11/4" (32mm) square. 120" (3048mm); cut to required height in field.

Headrail (for 1092 Series compartments only) — Extruded anodized aluminum. Enclosed construction with sloping top. Face has raised grip-resistant edge.


Designer's Notes:

- Headrails with integral curtain tracks and hooks are available for compartments without doors. Optional vinyl curtains are available.

Wall Posts — 1" by 1 1/2" (25 by 38mm) wide tubing; 18-8, Type-304, 16-gauge (1.6mm) stainless steel with satin-finish. 58" (1473mm) high, pre-drilled for door hardware.

Gapless Wall Posts — 2-3/4" by 1-5/8" (70 by 41mm) wide extrusion; Anodized aluminum finish. 58" (1473mm) high, pre-drilled mounting holes, hinge drilling to be done in the field (detailed instructions included with wall post packet). Gapless wall posts enable the attachment of a routed gapless door to eliminate sightlines.

Top View of 1092 (Barrel Hinge and Standard Bracket) installation.

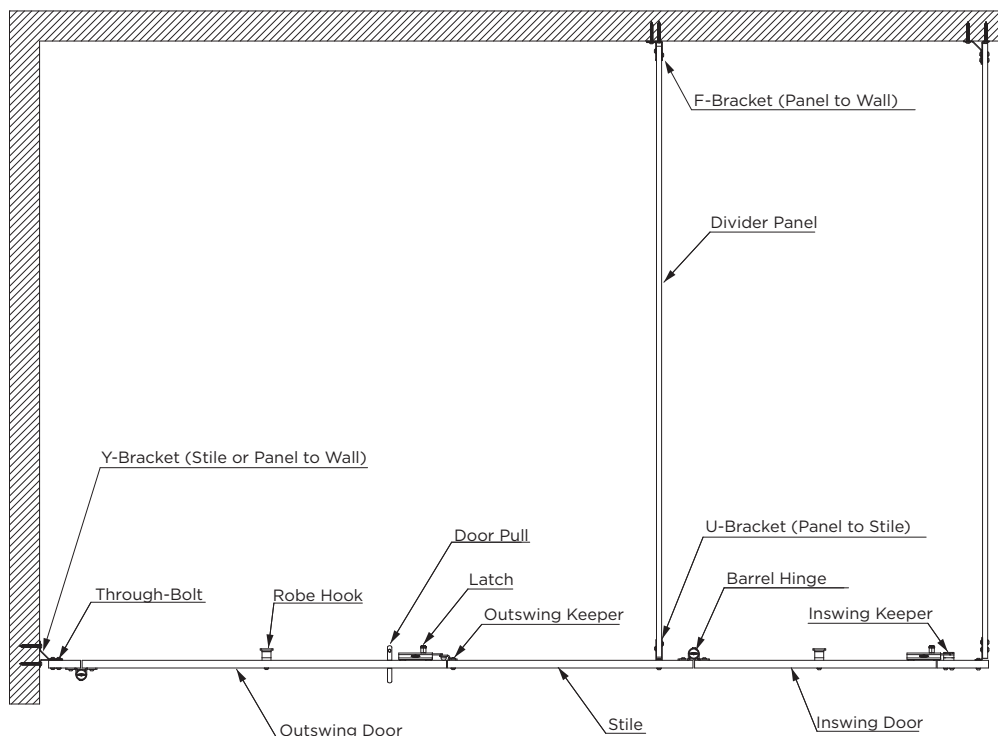


ANCHORING DEVICE:

Leveling Device — 3/16" (5mm) thick, corrosionresistant, chromate-treated, double zinc-plated steel angle leveling bar bolted to stile; furnished with 3/8" (10mm) diameter threaded rods, hex nuts, lock washers, flat washers, spacer sleeves, expansion anchors, and shoe retainers.

Shoe — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish; 4" (102mm) high. *Stiles for 1086 Series floor-to-ceiling anchored have a leveling device at each end.


#1002701 Floor Anchor

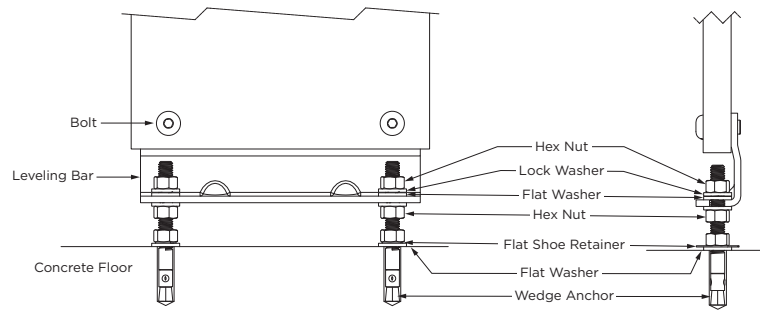


CEILING LEVELING DEVICE

Provisions must be in the construction of the building to support ceiling-hung toilet partitions. Structure in ceiling, not furnished by Bobrick, must support at least 275 lb per compact grade laminate toilet compartment, and must be sufficiently rigid to withstand swinging motion of toilet partition doors and impact of doors against stiles. Actual mounting system, including lateral bracing, if required, must be designed by the architect or structural engineer, and furnished by others. Wood beams are not recommended for ceiling hung application. **Note:** If adequate ceiling support cannot be provided, the floor-anchored or overhead-braced toilet compartments are recommended.


Approximate Weight: Solid Color Reinforced Composite Toilet Compartment - 275 lbs.

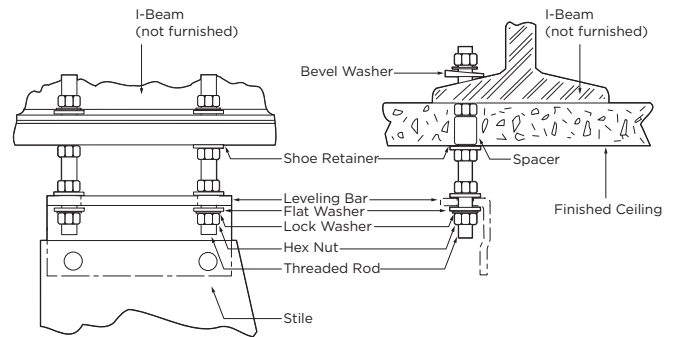


HEADRAIL INSTALLATION DETAIL

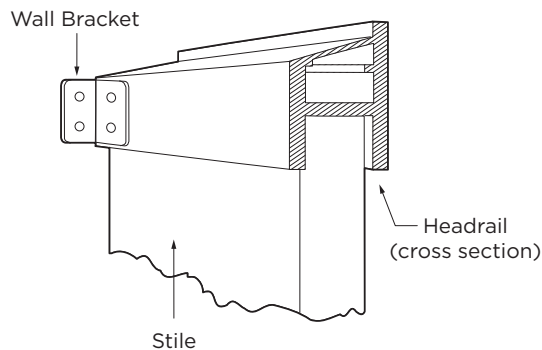


CURTAIN TRACK INSTALLATION DETAIL

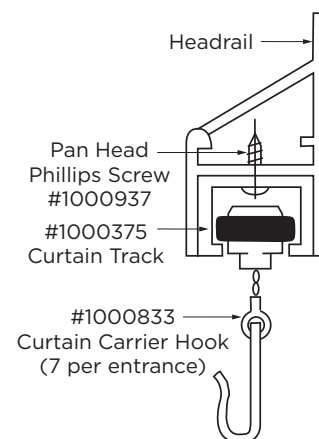

1091 SERIES FLOOR ANCHORED

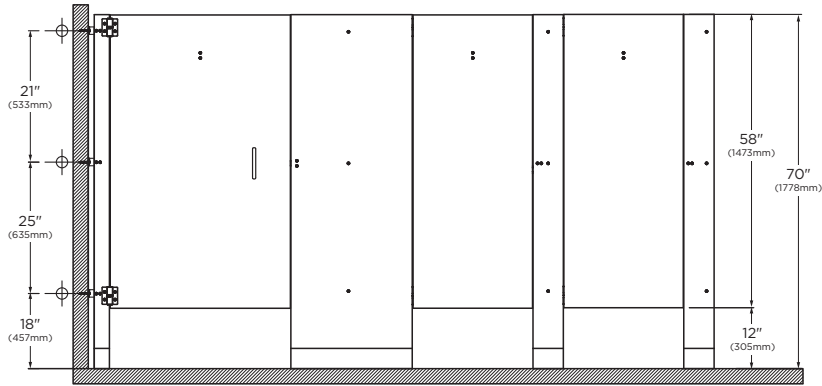

Front View

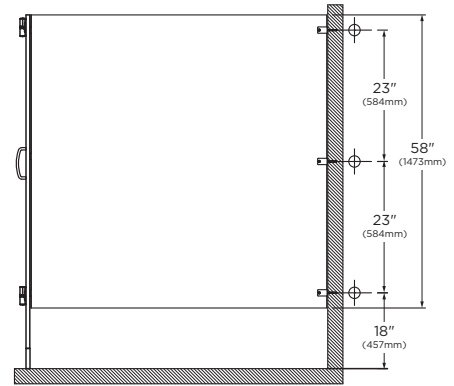

Side View

STANDARD:

- ☐ #1091 - Barrel Hinge and Standard Bracket


MODEL OPTIONS:

- ☐ #1091.67 - Continuous Hinge and Continuous Bracket
- ☐ #1091.67D - Continuous Hinge and Standard Bracket
- ☐ #1091.67P - Barrel Hinge and Continuous Bracket


GAPLESS MODEL OPTIONS:

- ☐ #1091G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1091G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1091G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1091G.67P - Gapless, Barrel Hinge and Continuous Bracket

1092 SERIES OVERHEAD-BRACED

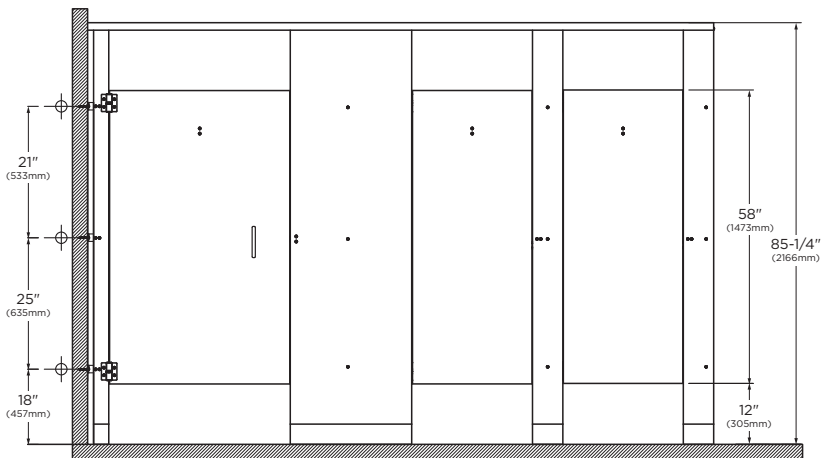

Front View

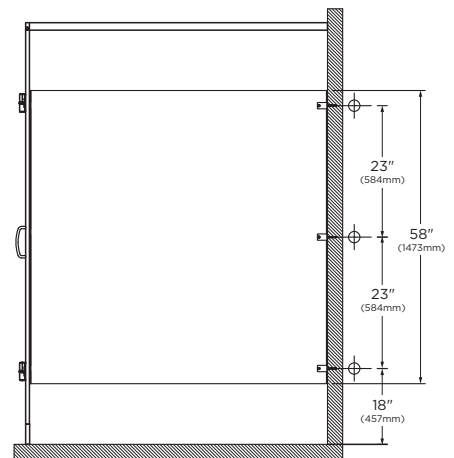

Side View

STANDARD:

- ☐ #1092 - Barrel Hinge and Standard Bracket

MODEL OPTIONS:


- ☐ #1092.67 - Continuous Hinge and Continuous Bracket
- ☐ #1092.67D - Continuous Hinge and Standard Bracket
- ☐ #1092.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1092.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1092.67P - Barrel Hinge and Continuous Bracket

GAPLESS MODEL OPTIONS:

- ☐ #1092G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1092G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1092G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1092G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1092G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1092G.67P - Gapless, Barrel Hinge and Continuous Bracket

CONTINUOUS .67 BRACKET (OPTION):



Mounting brackets are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height U-channels and angle brackets are 18 gauge (1.2mm). U-channels secure panels to stiles, and angle brackets secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for U-channels, Z-bracket and angle brackets. Mounting screws for stile to panel bracket is through-bolted.

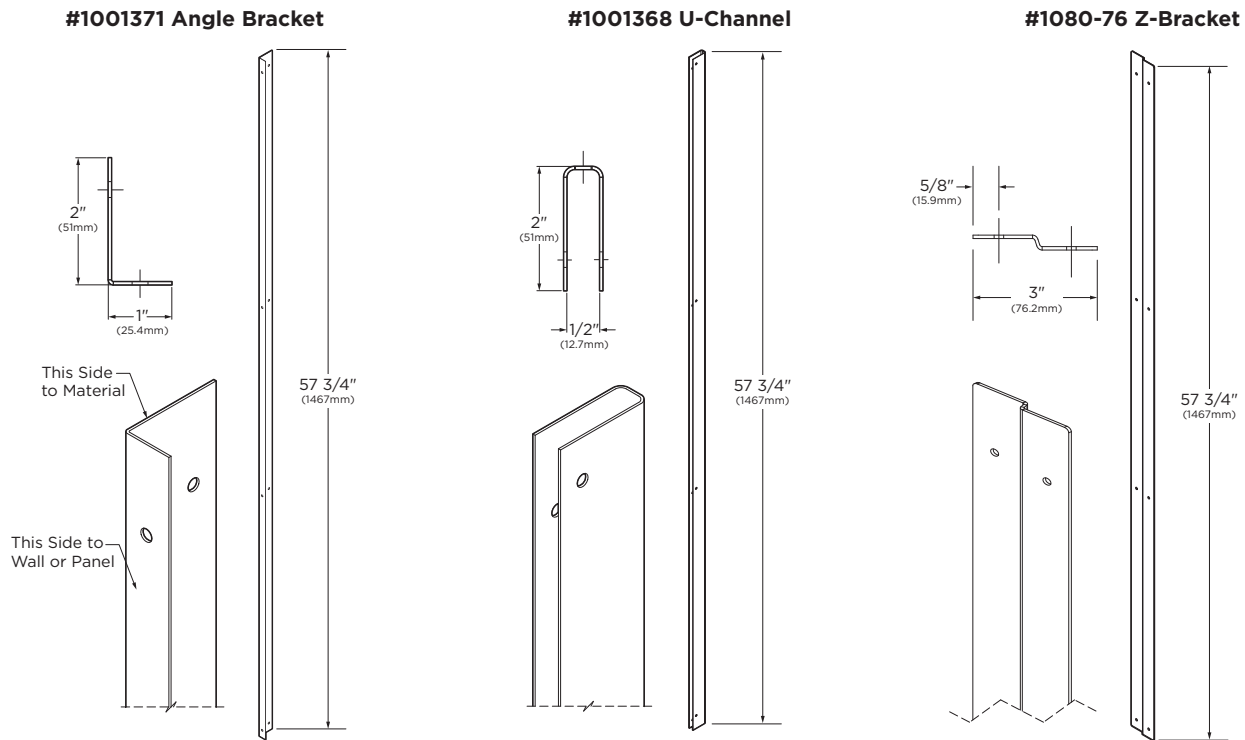




CONTINUOUS .67 HINGES (OPTION):

Hinges are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height hinge is 16 gauge (1.6mm); Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware. Doors are equipped with a gravity type self-closing hinge. Threaded inserts are factory installed to secure door hinge. **The continuous hinge (.67 option) depends on the weight of the door to return the hinge to its closed position, which may result in door slamming.**

#1002920
Left-Hand Inswing or
Right-Hand Outswing

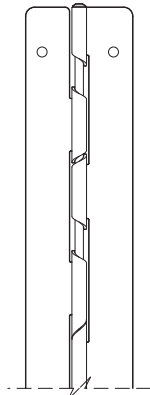


#1002921
Right-Hand Inswing
or Left-Hand Outswing




HINGE CAM MAINTENANCE:

Cleaning and lubricating hinge is required to avoid failure of hinge mechanism. Must use a Teflon type based lubricant such as Tri-Flow Superior Lubricant with P.T.F.E. It is not recommended to use machine oil or WD-40 which will collect dust and dirt.



1090 URINAL SCREENS:

#1002956 W/H Urinal Screen Bracket

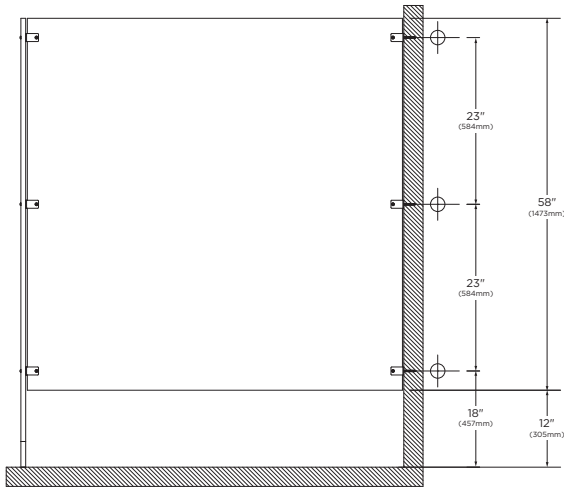


Floor Anchored Urinal Screen

STANDARD:

□ #1091 - Standard Bracket

MODEL OPTIONS:

□ #1091.67 - Continuous Bracket

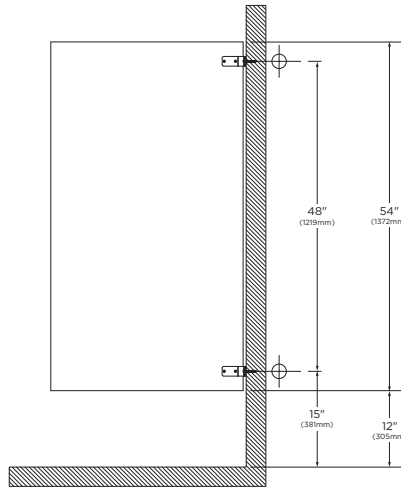

Wall Mounted Urinal Screen




Up to 54" (1372mm) high.

STANDARD:

□ #1095 - Standard Bracket

MODEL OPTIONS:


□ #1095.67 - Continuous Bracket



#1002966 #10-32 x 1-1/4" (38mm) Pin-in-Head Torx Screw



#1000133 Acorn Nut #10-32 Through-Bolt Urinal Screen

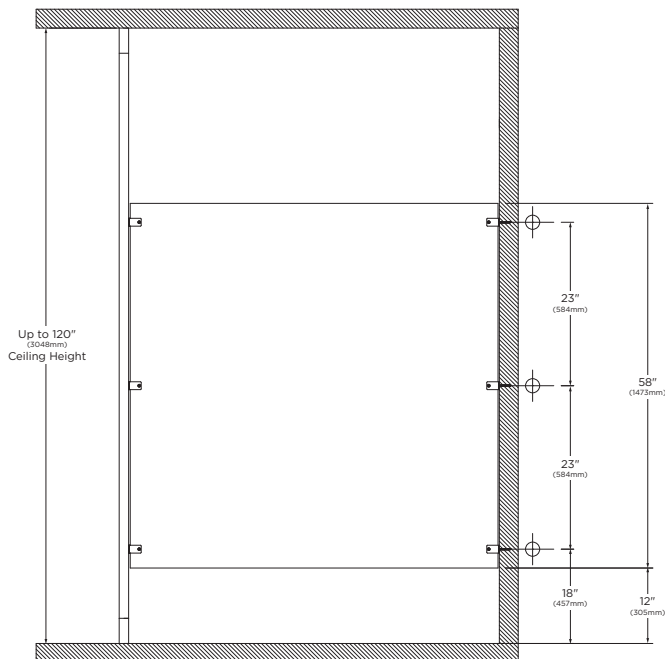


Post-to-Ceiling Urinal Screen

STANDARD:

□ #1093 - Standard Bracket

MODEL OPTIONS:

□ #1093.67 - Continuous Bracket

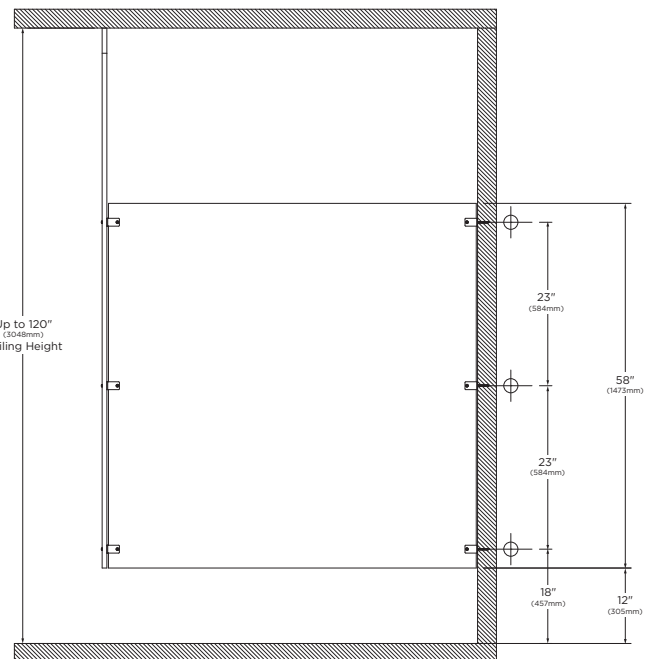

Ceiling-Hung Urinal Screen

STANDARD:

□ #1098 - Standard Bracket

MODEL OPTIONS:

□ #1098.67 - Continuous Bracket

INSTALLATION:

Refer to Bobrick installation instructions packed with each shipment. Also available on bobrick.com. Form No. 1090-69.

NOTES:

1. Ceiling-hung and floor-to-ceiling toilet compartments require structural members (not furnished by Bobrick) in ceiling. For suggested types of ceiling support systems, see Bobrick Advisory Bulletin TB-32.
2. Wall backing is required to secure the mounting brackets of panels, stiles, and wall posts. For suggested wall backing, see Bobrick Advisory Bulletin TB-46.
3. Floor-anchored stiles are furnished with expansion shields and threaded rods. The expansion shields require minimum 2" (50mm) penetration into minimum 3" (75mm) thick structural concrete.
4. Bobrick stainless steel partition-mounted washroom accessories are available for mounting in panels between two compartments. See current Bobrick Catalog for description of accessories. Cutouts in panels can be pre-cut for Bobrick models at factory if location and size of all cutouts and Bobrick model numbers are furnished at time of order.
5. When the hinge cam has been set at the desired free resting position, "either closed or open" the top of the affixed components will be aligned.

GUARANTEE:

Bobrick toilet partitions including all hardware and mounting brackets are guaranteed to be free from defects in material and workmanship for a period of one year from date of purchase. Any products returned to Bobrick under this guarantee will be repaired or replaced at no charge. **25-Year Warranty:** Bobrick extends a twenty-five-year limited warranty from date of purchase for SierraSeries Solid Color Reinforced Composite (SCRC) partition panels, doors, and stiles against breakage, delamination and corrosion when materials are properly installed, and normally used.

SPECIFICATION:

Water- and Fire-Resistant, Solid Color Reinforced Composite (SCRC) _____ (insert one product application: toilet partition, dressing compartment, shower divider, urinal screen) shall be _____ (insert one series: floor-anchored, overhead-braced, post-to-ceiling, wall-hung, floor-to-ceiling anchored, ceiling-hung) _____ (insert one series for Gap-Free: floor-anchored, overhead-braced, floor-to-ceiling anchored, ceiling-hung). Stiles, panels and doors shall be constructed of SCRC with GraffitiOff surface thermoset and integrally fused into one homogeneous piece. Surface, edges and core are to be same color. SCRC material shall be covered by a 25-year limited warranty against breakage, corrosion, and delamination. Stiles and doors shall be 3/4" (19mm) thick; panels shall be 1/2" (13mm) thick. All units shall meet ICC and NFPA Class B or UBC Class II, ASTM E 84 Fire-Resistance Standards. Stiles shall have leveling device that is concealed by a one-piece, Type-304, satin-finish stainless steel shoe that is 4" (102mm) high. Stiles, panels and doors shall be _____ (insert color name and number from current Bobrick Toilet Partition catalog). Headrails for overhead-braced compartments shall be anodized aluminum with satin finish.

All door hardware and mounting brackets shall be Type-304 stainless steel with satin finish. All doors shall be supplied with two hinges. Threaded inserts shall be factory installed for securing door hinges and latches. Theft-resistant, stainless steel pin-in-head Torx screws shall be furnished for door hardware and all mounting brackets. Through bolts shall be used for securing latch keeper, clothes hook and panel-to-stile brackets. Doors shall be equipped with a self-closing hinge. Hinges shall be adjustable to hold doors of unoccupied compartments partially open or fully closed. Hinges shall allow locked compartment to be opened in emergency from outside by lifting door to disengage latch from keeper. A clothes hook shall be furnished for each door.

*To specify Gapless door and stile option, add suffix "G" to series number. Example: specify 1092G.

**To specify Continuous hardware, replace end of specification paragraph with: .67 option All door hardware, U-channels, and angle brackets shall be Type-304 stainless steel with satin finish: one-piece, full-height hinges shall be 16 gauge (1.6mm); one-piece door keeper shall be 11 gauge (3.2mm); one-piece, full-height U-channels and angle brackets shall be 18 gauge (1.2mm). U-channels shall be furnished to secure panels to stiles, and angle brackets furnished to secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, Torx screws shall be furnished for door hardware, U-channels, and angle brackets. Through bolts shall be used for securing latch keeper and panel-to-stile brackets. Threaded inserts shall be factory installed to secure all door hinges and latches.

_____ (insert one: Toilet Partitions, Dressing Compartments, Shower Dividers, Urinal Screens, Entrance Screens) shall be _____ Series (insert series number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.



Technical Data

SierraSeries®

Solid Color Reinforced Composite Maximum Height Partitions and Screens

2090 SERIES

SPECIFICATION

Height: 71 3/4" (1822mm) Doors and Panels with Standard 4-1/2" (114mm) Floor Clearance
Floor Clearance Option: 9" (229mm) or 12" (305mm)

MATERIAL

Stiles* — 3/4" (19mm) thick, SCRC with GraffitiOff™ surface thermoset and integrally fused into one homogenous piece. Surface, edge, core are to be the same color. *Stiles for 1096 Series floor-to-ceiling anchored units have a leveling device at each end.

Standard Size Stiles:

- For compartments — 3", 4", 5", 6", 7", 8", 10", 12", 16", 18", 20", or 24" (76, 102, 127, 152, 179, 203, 254, 305, 406, 457, 508, 610mm) wide.
- For screens — 6" (152mm) wide.
- Floor-anchored — 69" (1753mm) high.
- Overhead-braced — 83" (2108mm) high.
- Floor-to-ceiling anchored — Up to 120" (3048mm) ceiling height.
- Ceiling-hung — 83" (2108mm) high for 96" (2438mm) ceilings or as required up to 120" (3048mm) ceilings.

Panels — 1/2" (13mm) thick, SCRC with GraffitiOff surface thermoset and integrally fused into one homogeneous piece. Surface, edge, core are to be the same color.


Standard Size Panels:

- For compartments — Up to 84" (2134mm) wide; 71 3/4" (1822mm) high.

Designer's Notes:

If the width of the panel exceeds 60" (1524mm), the layout will need to be redesigned with one of the following options:


- Add an in-line stile at the back wall to accommodate a large stall depth.



Inline Stile at Back Wall


Side View

- The panel will be two pieces and require a horizontal H Channel to obtain 71 3/4" (1822mm) height requirement.



H-Channel, Two-Piece Panel

Side View



Front View

Urinal Screens — 1/2" (13mm) thick, SCRC with GraffitiOff surface thermoset and integrally fused into one homogeneous piece. Surface, edge, core are to be the same color.

Standard Size Urinal Screens:

- For wall-hung screens — Up to 24" (610mm) wide; 71 3/4" (1822mm) high.
- For floor anchored and post-to-ceiling screens — Up to 60" (1524mm) wide; 71 3/4" (1822mm) high.

Doors — 3/4" (19mm) thick, SCRC with GraffitiOff surface thermoset and integrally fused into one homogeneous piece. Surface, edge, core are to be the same color.

Standard Size Doors:

- Inswing and outswing doors are standard 22" to 37" (559 to 940mm) wide; 71 3/4" (1822mm) high.

Edges — SCRC is a natural material comprised of wood chips, dyes and resins with a melamine surface. Edges lack a melamine surface and may discolor in environments with significant UV lighting. Discoloration of edges, should it occur, is not covered under warranty.

Posts (for 2093 Series screens only) — 1 1/4" (32mm) square tubing; 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish. Floor and ceiling connections are constructed of 18-8, Type-304, heavy-gauge stainless steel. Furnished in 120" (3048mm) lengths; to be cut in field to job specifications.

Standard Size Post:

- For 2093 Series post-to-ceiling screens only. 1 1/4" (32mm) square. 120" (3048mm); cut to required height in field.

Headrail (for 2092 Series compartments only) — Extruded anodized aluminum. Enclosed construction with sloping top. Face has raised grip-resistant edge.


Designer's Notes:

- Headrails with integral curtain tracks and hooks are available for compartments without doors. Optional vinyl curtains are available.

Wall Posts — 1" by 1 1/2" (25 by 38mm) wide tubing; 18-8, Type-304, 16-gauge (1.6mm) stainless steel with satin-finish. 72" (1829mm) high, pre-drilled for door hardware.

Gapless Wall Posts — 2-3/4" by 1-5/8" (70 by 41mm) wide extrusion; Anodized aluminum finish. 71-3/4" (1822mm) high, pre-drilled mounting holes, hinge drilling to be done in the field (detailed instructions included with wall post packet). Gapless wall posts enable the attachment of a routed gapless door to eliminate sightlines.

Top View of 2092 (Barrel Hinge and Standard Bracket) Installation.

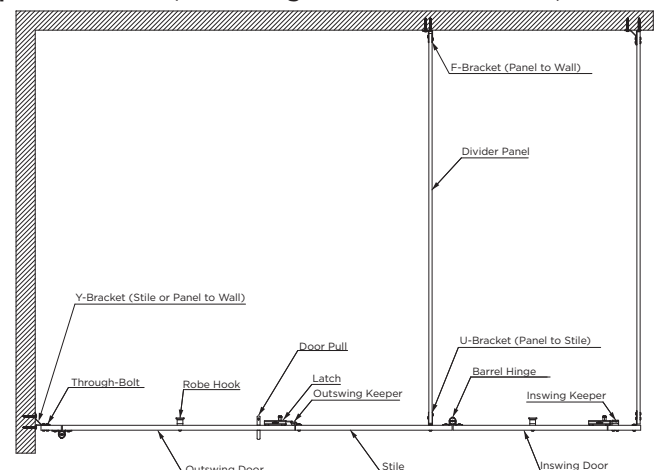


ANCHORING DEVICE:

Leveling Device — 3/16" (5mm) thick, corrosion-resistant, chromate-treated, double zinc-plated steel angle leveling bar bolted to stile; furnished with 3/8" (10mm) diameter threaded rods, hex nuts, lock washers, flat washers, spacer sleeves, expansion anchors, and shoe retainers.

Shoe — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish; 4" (102mm) high. *Stiles for 1086 Series floor-to-ceiling anchored have a leveling device at each end.


#1002701 Floor Anchor

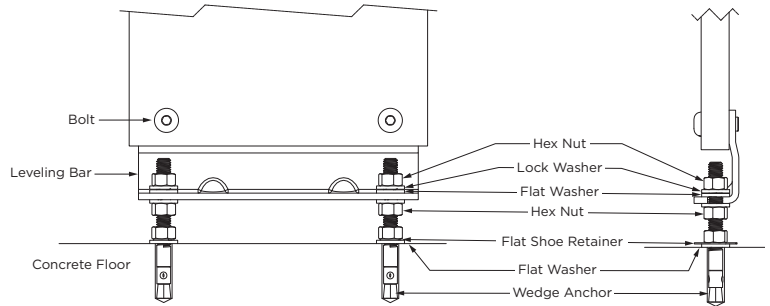


CEILING LEVELING DEVICE

Provisions must be in the construction of the building to support ceiling-hung toilet partitions. Structure in ceiling, not furnished by Bobrick, must support at least 275 lbs. per compact grade laminate toilet compartment, and must be sufficiently rigid to withstand swinging motion of toilet partition doors and impact of doors against stiles. Actual mounting system, including lateral bracing, if required, must be designed by the architect or structural engineer, and furnished by others. Wood beams are not recommended for ceiling hung application. **Note:** If adequate ceiling support cannot be provided, the floor-anchored or overhead-braced toilet compartments are recommended.


Approximate Weight: Solid Color Reinforced Composite Toilet Compartment - 275 lbs.

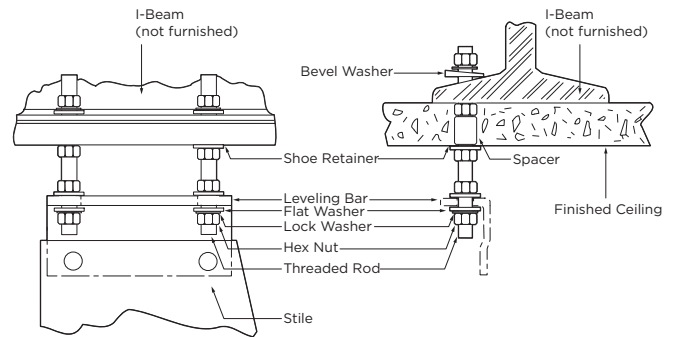

HEADRAIL INSTALLATION DETAIL

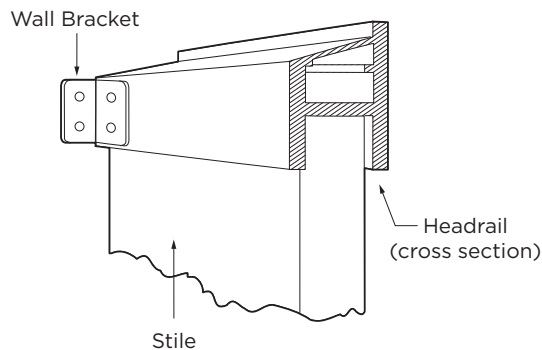

CURTAIN TRACK INSTALLATION DETAIL

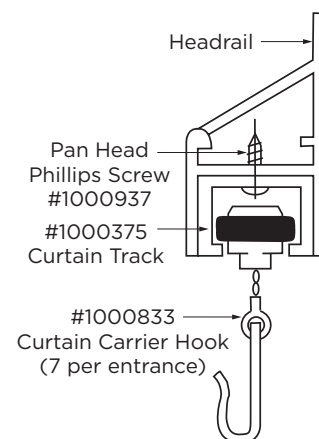


COMMERCIAL HARDWARE (STANDARD)

Hinges, door latch, door keepers, clothes hooks, mounting brackets and door handles are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish.


Threaded inserts are factory installed for securing hinges and door latch. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware and all mounting brackets. Mounting screws for stile to panel bracket, latch keeper, and coat hook connections are through-bolted.

Balanced hinge is adjustable to hold door of unoccupied toilet compartment partially open or fully closed.


Toilet compartment door is locked from inside by sliding door latch into keeper. A locked compartment may be opened from outside by lifting door to disengage latch from keeper. Track of door latch prevents inswing door from swinging out beyond stile; on outswing door, the door keeper prevents it from swinging in beyond stile. Door handles and latch have operable parts that are operable with one hand and do not require tight grasping, pinching, or twisting of the wrist; and comply with ADA Sections 404.2.7 and 309.4. The force required to activate the operable parts shall be 5 pounds (22.2N) maximum. Black rubber bumper on the latch serves as door bumper for inswing door.

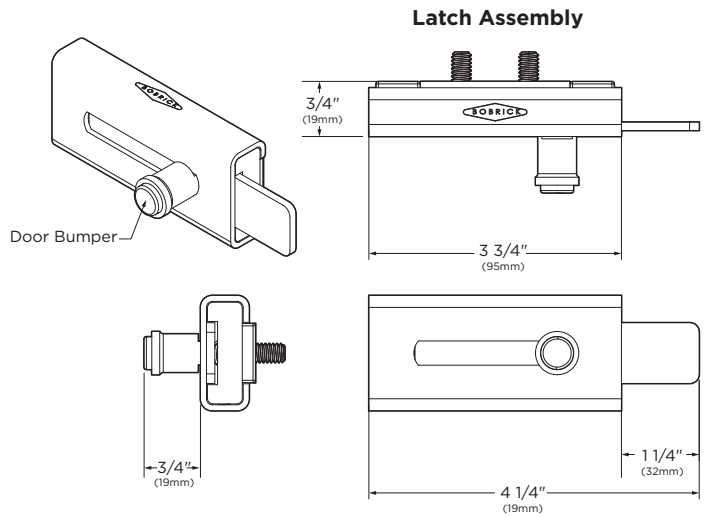


#1040-114
Latch & Keeper Packet,
(Inswing Door)

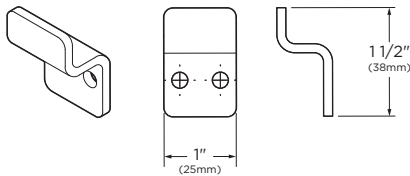


#1040-35
Keeper, inswing
(Available as a Spare Part)





#1040-115
Latch & Keeper Packet,
(Outswing Door)

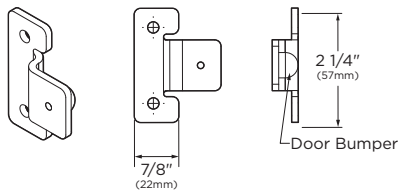


#1040-36
Keeper, Outswing
(Available as a Spare Part)

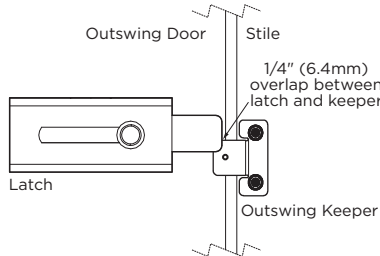


#1040-39
Perpendicular Keeper

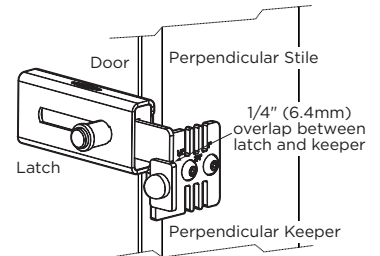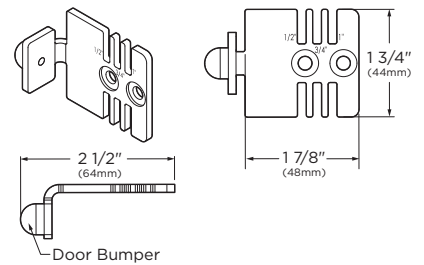


#1040-56 Wall Mounted
Keeper Inswing

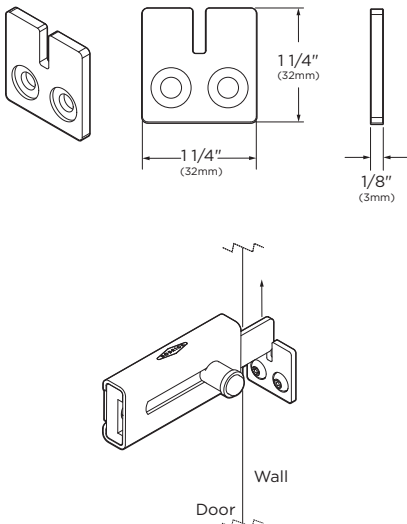


#1000869
Coat Hook

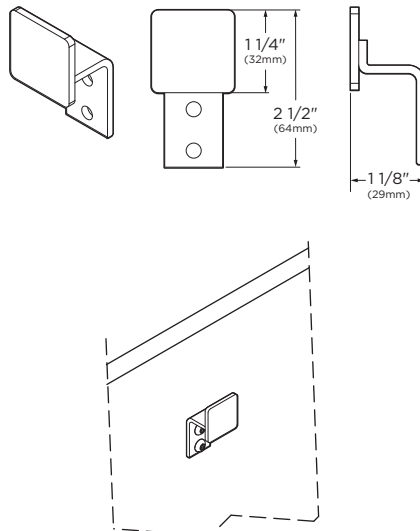


#1000312
Door Pull Handle

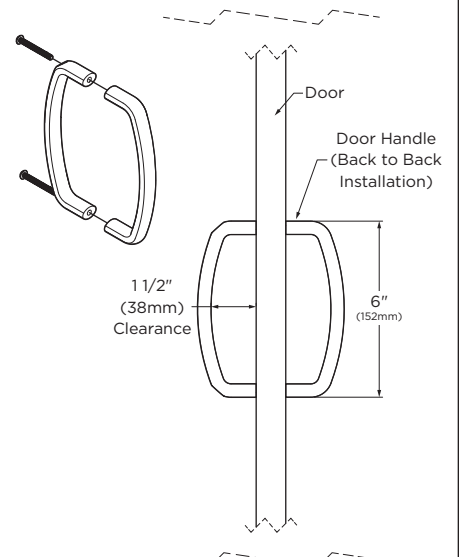


#1040-230
L & J Hinge Set Packet
(Includes Hinge Cam)

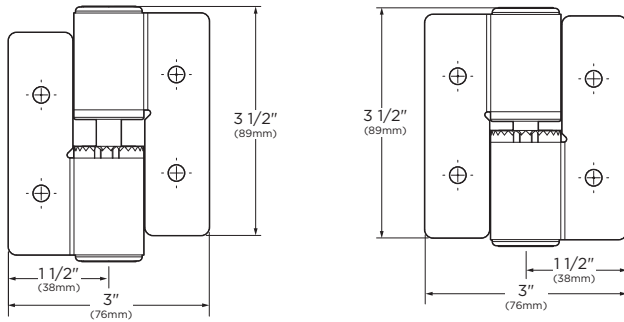

#1002330
Barrel Hinge Set, L
(Includes Hinge Cam)




#1002156
Hinge Cam




#1002331
Barrel Hinge Set, J
(Includes Hinge Cam)

Hinges are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish. Threaded inserts are factory installed for securing hinges. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware. Balanced hinge is adjustable to hold door of unoccupied toilet compartment partially open or fully closed.


Cam Settings

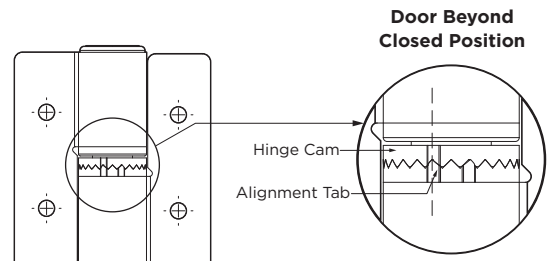


Door Beyond Closed Position

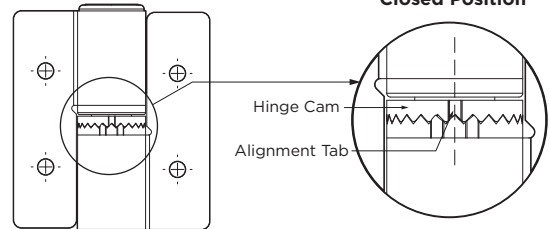

Door Normal Closed Position

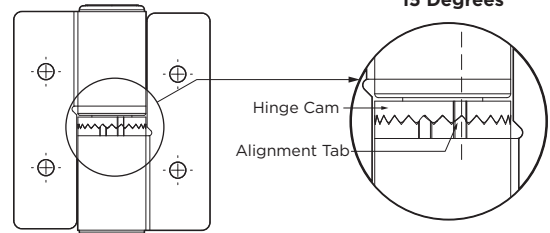


Door Remain Open 15 Degrees




#1002491
1/4-20 x 1 1/2" (M6-1 x 13mm)
Pin-in-Head Torx Screw

BRACKETS (STANDARD):


#1000282
Alcove Bracket
(1/2" Panel to 3/4" Stile)



#1000351
L-Bracket
(Panel to Corner Stile)




#1000972
U-Bracket
(Panel to Perp. Stile)




#1002664
#10-24 x 3/8" Button Head
Torx Screw (to attach to sex-bolt
fastener through 1/2" panel)



#1000974
Y-Bracket
(Stile to Wall)




#1000975
F-Bracket
(Panel to Wall)

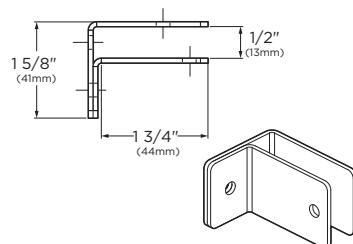


#1002499
#12 x 7/16" Pin-in-Head Torx Screw
(M5.5 x 11mm)




#1002665
#10-24 x 5/8" Button Head
Torx Screw (to attach to sex-bolt
fastener through 3/4" stiles)




#1002495
#12 x 2" Pin-in-Head Torx Screw
(M5.5 x 50mm) Wall Screw




#1002666
#10-24 Pin-in-Head Sex Bolt,
1/4" Diameter, 1/2" Barrel
(fastener for all through-
bolted locations)



2091 SERIES FLOOR ANCHORED

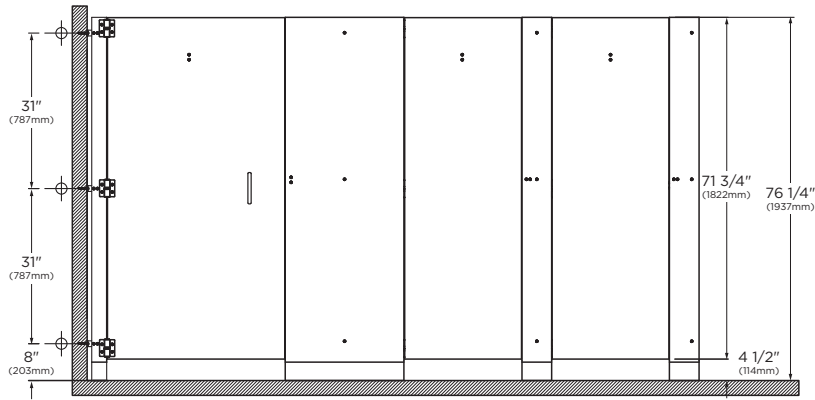

Front View

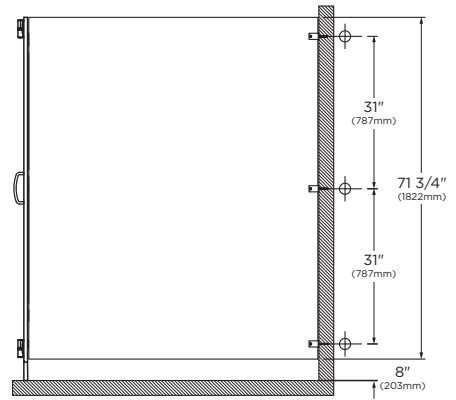

Side View

STANDARD:

- ☐ #2091 - Barrel Hinge and Standard Bracket


MODEL OPTIONS:

- ☐ #2091.67 - Continuous Hinge and Continuous Bracket
- ☐ #2091.67D - Continuous Hinge and Standard Bracket
- ☐ #2091.67P - Barrel Hinge and Continuous Bracket


GAPLESS MODEL OPTIONS:

- ☐ #2091G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #2091G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #2091G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #2091G.67P - Gapless, Barrel Hinge and Continuous Bracket

2092 SERIES OVERHEAD-BRACED

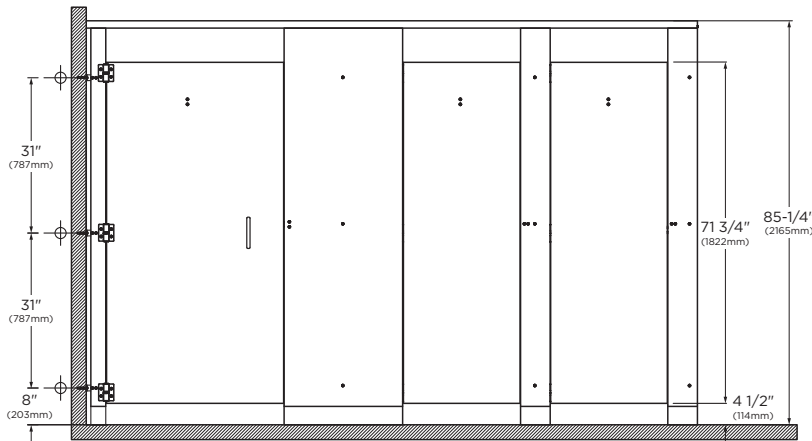

Front View

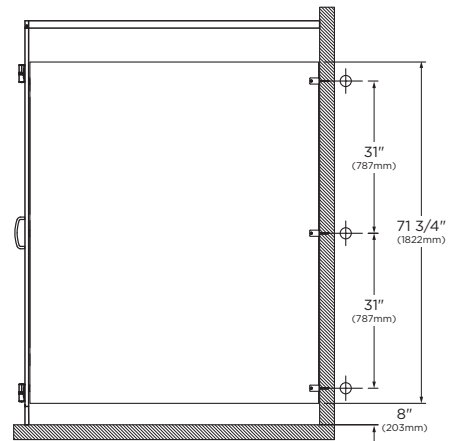

Side View

STANDARD:

- ☐ #2092 - Barrel Hinge and Standard Bracket

MODEL OPTIONS:

- ☐ #2092.67 - Continuous Hinge and Continuous Bracket
- ☐ #2092.67D - Continuous Hinge and Standard Bracket
- ☐ #2092.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #2092.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #2092.67P - Barrel Hinge and Continuous Bracket


GAPLESS MODEL OPTIONS:

- ☐ #2092G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #2092G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #2092G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #2092G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #2092G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #2092G.67P - Gapless, Barrel Hinge and Continuous Bracket


CONTINUOUS .67 BRACKET (OPTION):

Mounting brackets are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height U-channels and angle brackets are 18 gauge (1.2mm). U-channels secure panels to stiles, and angle brackets secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for U-channels, Z-bracket and angle brackets. Mounting screws for stile to panel bracket are through-bolted.


#1002387 Angle Bracket

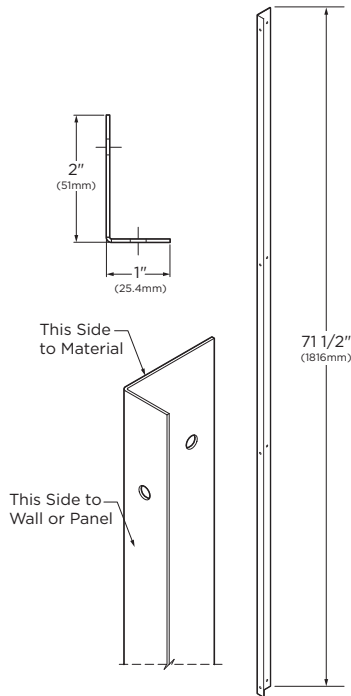

#1002388 U-Channel

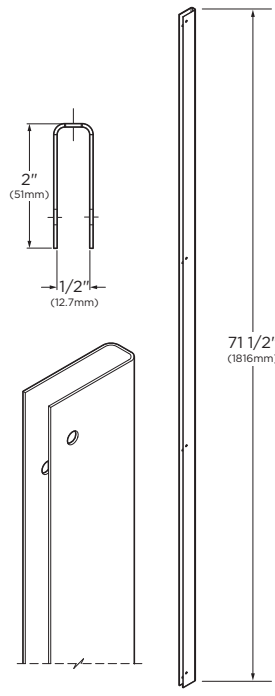



#2080-76 Z-Bracket

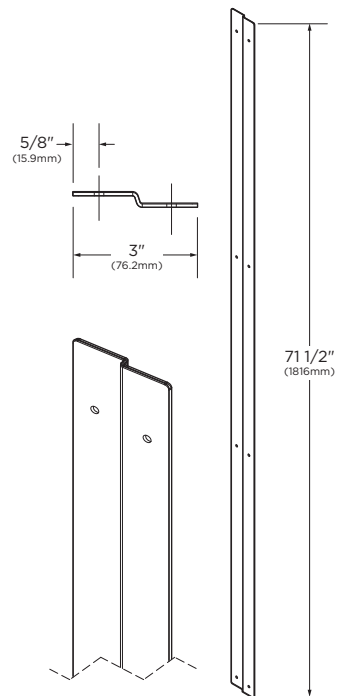




CONTINUOUS .67 HINGES (OPTION):

Hinges are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height hinge is 16 gauge (1.6mm); Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware. Doors are equipped with a gravity type self-closing hinge. Threaded inserts are factory installed to secure door hinge. **The continuous hinge (.67 option) depends on the weight of the door to return the hinge to its closed position, which may result in door slamming.**

**#1002924
Left-Hand Inswing or
Right-Hand Outswing**

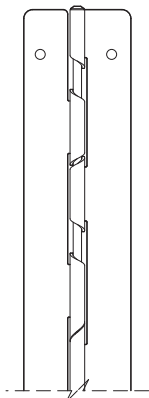


**#1002925
Right-Hand Inswing
or Left-Hand Outswing**

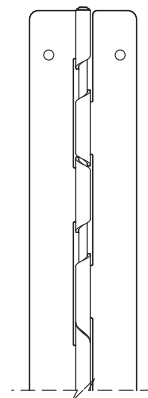


HINGE CAM MAINTENANCE:

Cleaning and lubricating hinge is required to avoid failure of hinge mechanism. Must use a Teflon type based lubricant such as Tri-Flow Superior Lubricant with P.T.F.E. It is not recommended to use machine oil or WD-40 which will collect dust and dirt.




**#1002491
1/4-20 x 1/2" (M6-1 x13mm)
Pin-in-Head Torx Screw**

☐ **OCCUPANCY INDICATOR LATCH (OPTION):**

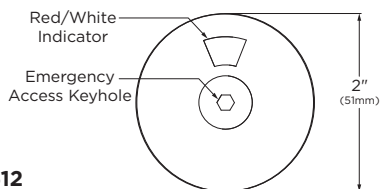


#1002612
Occupancy Indicator
Latch Packet




Emergency Access - The latch allows the door to be opened from the exterior of the toilet compartment by inserting a 3mm Allen key into the keyhole in the center of the cover plate and turning the key to release the latch.

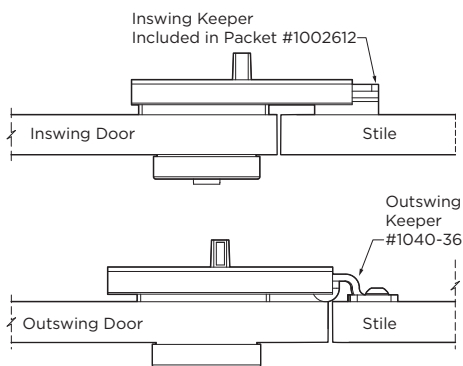


☐ **DOOR STOP (OPTION):**




#1040-110
Door Stop Packet

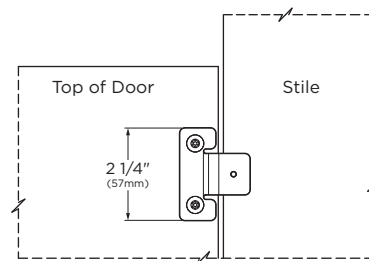

GAP FREE DOORS & STILES (OPTION):

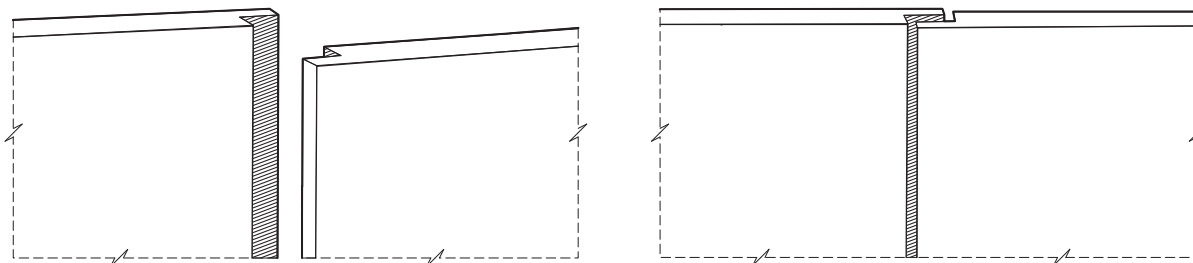

Features: Interlocking, sightline-free design (Gapless).

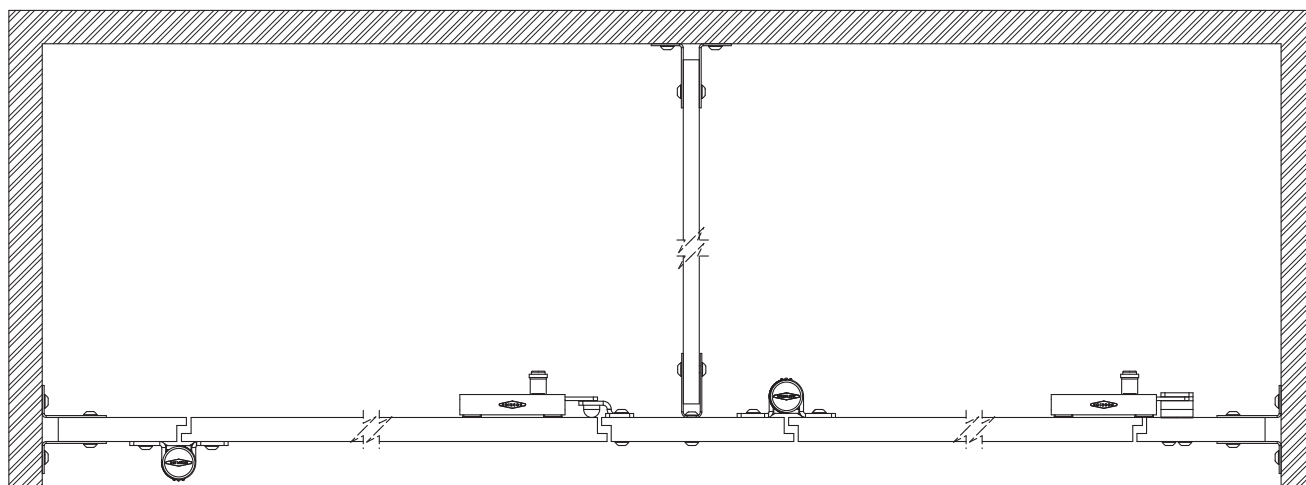

HEIGHT

PANEL 71 3/4

STILE 83

DOOR 71 3/4

COLOR SELECTION

SC04-QZ-Forest Green

SC04-QZ-Forest Green

SC04-QZ-Forest Green

DISTRIBUTOR 35205 - FRY SPECIALTY INC

QUOTE#/S.O.# 9132573-1

P.O.#

DATE 9/5/2024


JOB NAME BU Warren Towers

ROOM Women 409A

Note: Dimensions are in inches

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 4 1/2

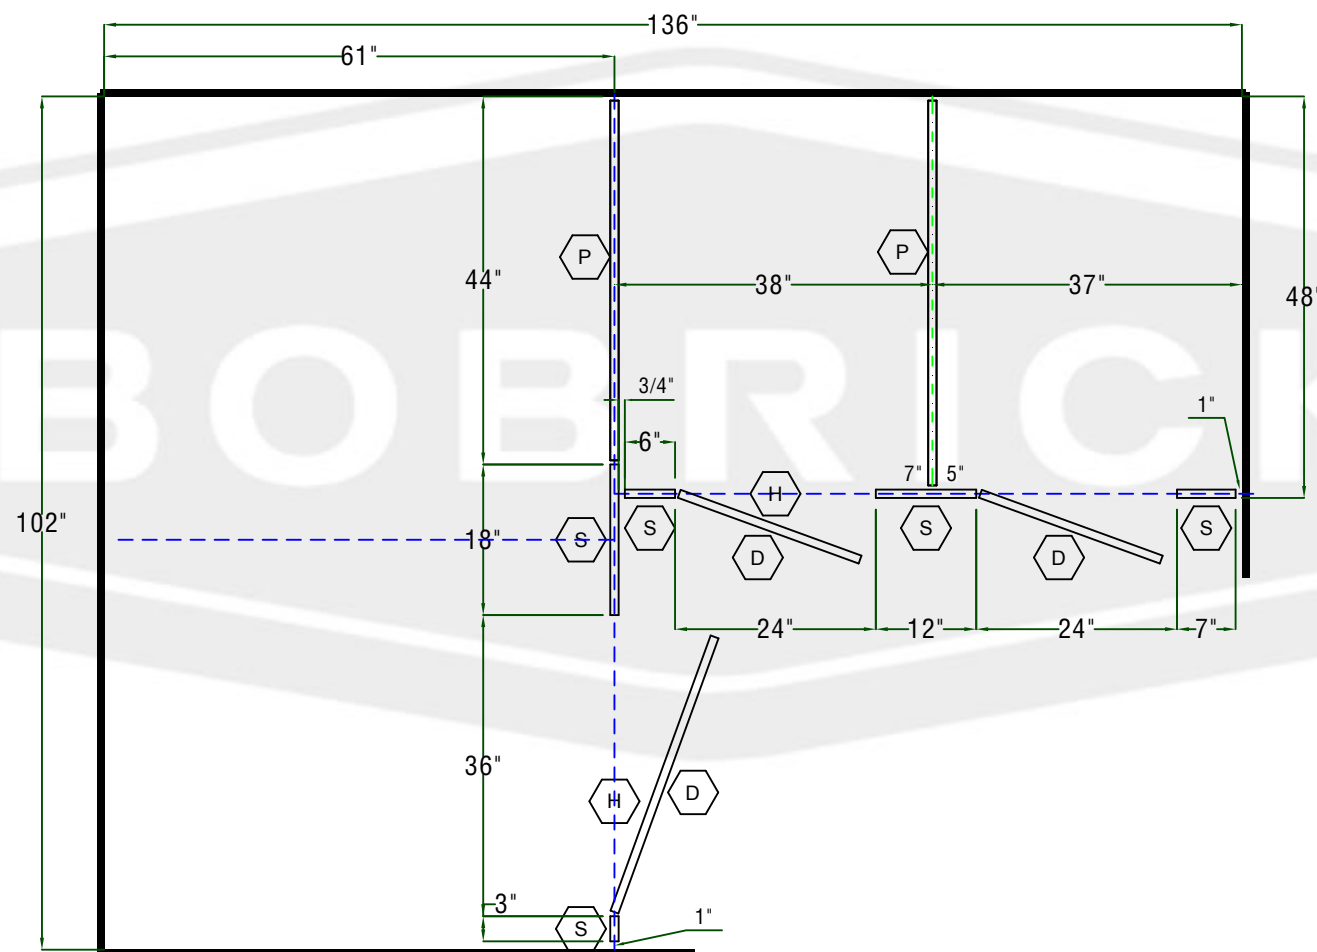

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL
PLUS 1/4" PANEL TO STILE
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED



STILE



WALLPOST



DOOR



PANEL



HEADRAIL



BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN
BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY.
PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED _____




SIERRA
Max Privacy Gapless

Series: 2092G.67P Type: Overhead Braced Layout: Right Alcove Inline 1 stall

HEIGHT	COLOR SELECTION	DISTRIBUTOR	35205 - FRY SPECIALTY INC	Note: Dimensions are in inches
PANEL 71 3/4	SC04-QZ-Forest Green	QUOTE#/S.O.#	9132573-1	
STILE 83	SC04-QZ-Forest Green	P.O.#		
DOOR 71 3/4	SC04-QZ-Forest Green	DATE	9/5/2024	
		JOB NAME	BU Warren Towers	
		ROOM	Men 415	

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 4 1/2

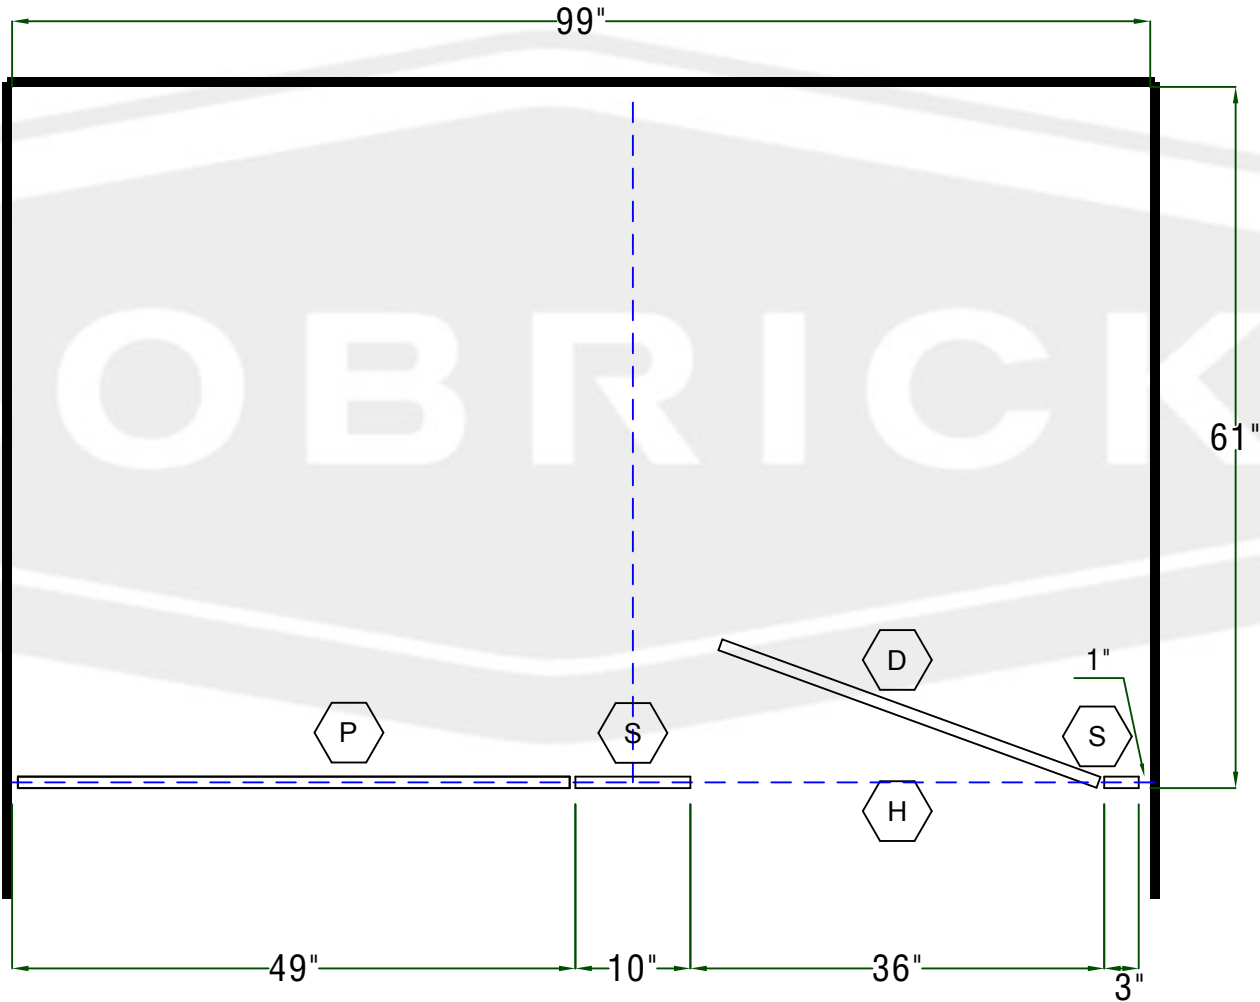



MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL
PLUS 1/4" PANEL TO STILE
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

STILE WALLPOST DOOR PANEL HEADRAIL BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN
BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY.
PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED _____
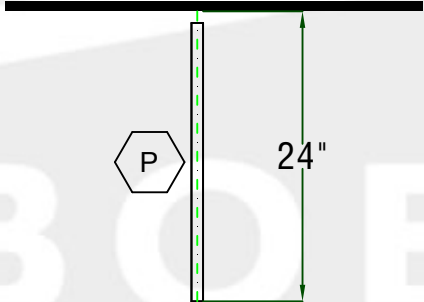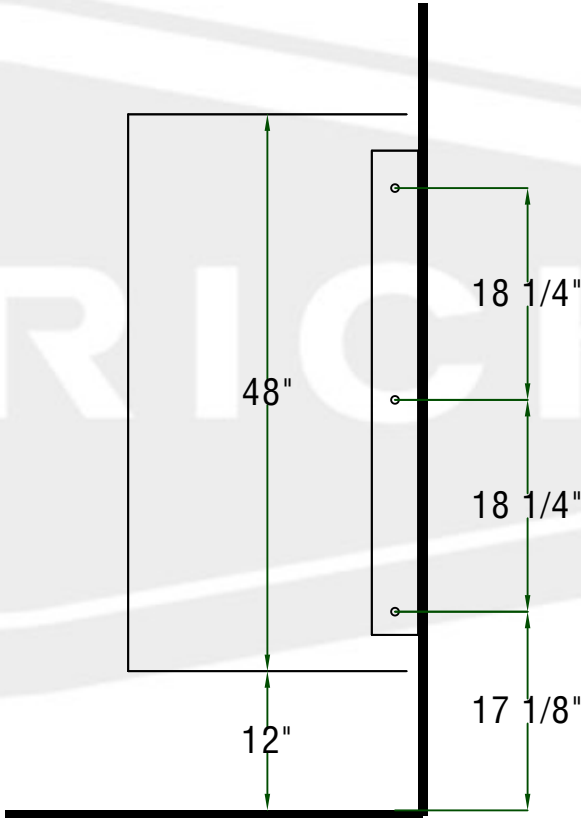
<div><div>BOBRICK</div><div>SIERRA</div></div>		Series: 1095.67	Type: Screen Wall Hung	Layout: Urinal Screen	3 Of 3
COLOR SELECTION SC04-QZ-Forest Green SC04-QZ-Forest Green SC04-QZ-Forest Green		DISTRIBUTOR 35205 - FRY SPECIALTY INC QUOTE#/S.O.# 9132573-1 P.O.# DATE 9/5/2024		Note: Dimensions are in inches JOB NAME BU Warren Towers ROOM Men 415	
<p>Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.</p>					
FLOOR CLEARANCE 12					
					
PLAN VIEW			SIDE VIEW		
MAKE 1 UNITS THUS					
EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.					
1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL PLUS 1/4" PANEL TO STILE NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED		<div><div>S</div> STILE<div>W</div> WALLPOST<div>D</div> DOOR<div>P</div> PANEL<div>H</div> HEADRAIL<div>B</div> BENCH</div>			
APPROVED _____					



BUILDING VALUE SINCE 1906



SOLID COLOR REINFORCED COMPOSITE (SCRC) STANDARD COLORS & PATTERNS




Golden Khaki
SC01



Desert Beige
SC02



Terra Cotta
SC03

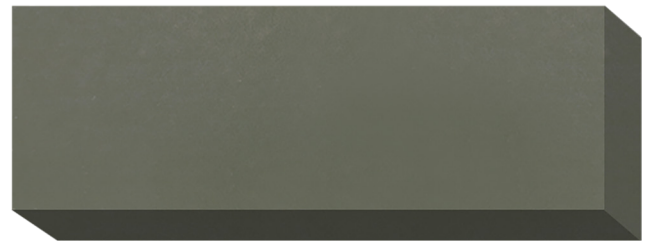

Forest Green
SC04

SCRC minor edge nicks and random color variations are normal consequences of manufacturing material containing natural fibers. Material can vary in color between thicknesses and production batches.

Trespa is a registered trademark of Trespa International BV.

TRESPA®
(SCRC)

PERFORMANCE SPOTLIGHT

SCRC: Hard to Scratch. Easy to Clean.

The proof is in the testing. SCRC offers the performance you need for high traffic and vandal-prone restrooms.



5 out of 6 marks removed

The ASTM D 6578 graffiti resistance test consists of preparing material samples with marks from six staining agents. After 24 hours, the marks are cleaned until they are removed.

Five out of six marks were removed from SCRC.



Zero scratches under 6 kg of weight

In the ASTM D 2197 scratch resistance test procedure, weights up to 10 kg (22 lbs) are added to a scraper and a material sample is dragged beneath the scraper. When a scratch occurs, the weight is recorded.

SCRC did not scratch with 6 kilograms of weight.