

Drawing Notes

- Compartment widths on drawings are shown at center line of panels.
- Compartment depths on drawings are shown from front face of pilaster to finished wall.
- Cut headrail in field to suit (if applicable).
- "X" on drawings indicates that backing is required.
- Fabrication will not commence until approval has been received.
- Material supplied will conform to the dimensions indicated on drawings.
- Scale of drawings - none.
-  on drawings indicates location of pilaster reinforcing channel(s).

Project Title screen

Created By Christina Ziccardi


Last edit date 11/12/2025

Distributor Fry Specialty Inc.

Drawing Title screen

Date Printed 11/12/2025

Project Number P1150816

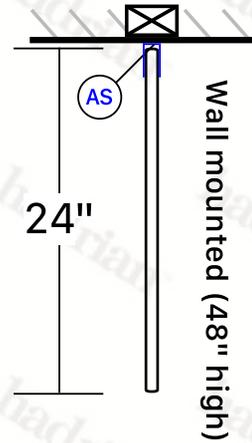

Location of urinal screen(s) may not be correctly reflected in this drawing

LEGEND

(AS) Screen H Bracket

Product Toilet Partitions

Material Stainless Steel

Finish 900 - 304 #4 Brushed

Partition Headrail Braced

Series Standard

AFF 12"

Hardware Standard Chrome

Options None

Sightline Option None

Hinge Wrap

Latch Concealed

WALL MOUNTED - STAINLESS STEEL METAL URINAL SCREENS - STANDARD**1.01 Construction**

Screens shall be constructed of two sheets of panel flatness type 304, #4 brushed finish stainless steel, laminated under pressure to a "vertical" honeycomb core for impact resistance, rigidity and sound deadening. Honeycomb to be of virgin, long fiber paper with a maximum 19mm (0.75") cell size. Formed edges to be welded together and interlocked, under tension, with a roll-formed oval crown stainless steel locking bar, mitred, welded and ground smooth at the corners.

1.02 Wall Mounted

Screens shall be 25mm (1") thick with cover sheets not less than 22-gauge (0.8mm / .030"). Screens shall be 457mm (18") or 610mm (24") deep by 1219mm (48") high and anchored into the wall approximately 305mm (12") off the floor.

1.03 Hardware & Fittings

Screens shall be fastened to the wall with double-ear brackets that are chrome plated zinc die cast. Floor mounted with pilaster and floor to ceiling mounted with post to be fastened to the front support with "U" brackets that are chrome plated zinc die cast.

1.04 Finish

Type 304, #4 brushed finish stainless steel.



This specification applies to room(s): screen

Metal Urinal Screens

Standard Series - Wall mounted

12" [305mm] AFF

Stirrup Bracket Installation

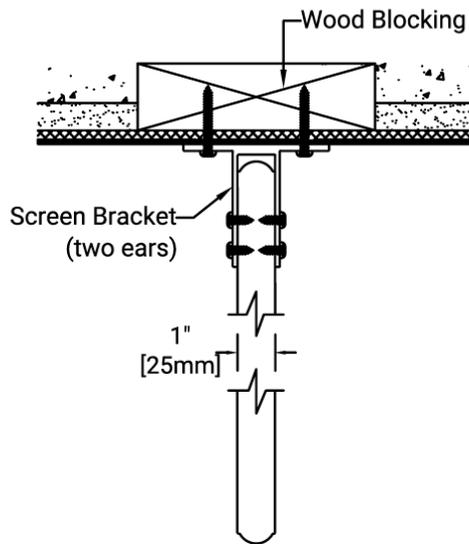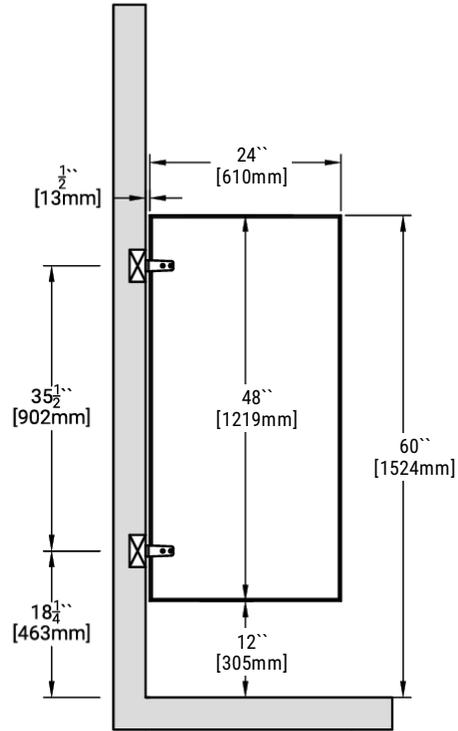

Available Panel Depths

18" [457mm]

24" [610mm]

Warranty Information

Hadrian Manufacturing Inc. ("Hadrian") provides the following warranty with respect to the Hadrian product(s) supplied for the project indicated above.

Subject to the terms set out herein, the product(s) are warranted against defects in material and workmanship from the date of receipt by the authorized Hadrian distributor for the warranty period outlined below:

| | |
|---------------------------------------|----------|
| Powder Coated Toilet Partitions | 3 years |
| Stainless Steel Toilet Partitions | 5 years |
| Solid Plastic Toilet Partitions | 25 years |
| Phenolic Black Core Toilet Partitions | 25 years |
| Emperor (corridor) Lockers | 2 years |
| Gladiator (athletic) Lockers | 5 years |
| Replacement Front Lockers | 2 years |
| Boot Racks | 1 year |


The warranty is for Hadrian material only and excludes damages caused by installation errors, vandalism, improper usage, improper maintenance, exposure to harsh environments or chemicals (such as chlorine, bromine, etc.) or failure of the building structure to adequately support the product. Site preparations (i.e. wood blocking, etc.) must meet final drawing specifications and Hadrian's recommended maintenance procedure must be followed.

The exclusive remedy under this warranty shall, at Hadrian's discretion, be replacement or repair of the defective material. Hadrian will not pay any removal, installation or other labor costs associated with the repair or replacement. Replacement material will be warranted for the unused portion of the original warranty period.

No warranty of merchantability or fitness for a particular purpose is made or implied. In no event shall Hadrian be liable for any other costs or damages, including loss of profit, loss of revenue, indirect, incidental, special or consequential damages howsoever arising, whether under warranty, contract, statute, tort, equity or otherwise.

This warranty extends only to the original authorized Hadrian customer and is non-transferable. Warranty claims must be made during the applicable warranty period and initiated by contacting Hadrian at the following coordinates: USA: 440-942-9118 / CANADA: 905-333-0300.

The foregoing constitutes the entire warranty given by Hadrian and no one is authorized to change or expand this warranty on behalf of Hadrian.



Hadrian Manufacturing Inc., 965 Syscon Road, Burlington, ON, L7L 5S3 T: 905-333-0300 F: 905-333-1841
Hadrian Manufacturing Inc., 2550 - 61 Avenue SE, Calgary, AB, T2C 4V2 T: 905-333-0300 F: 905-333-1841
Hadrian Inc., 7420 Clover Avenue, Mentor, OH, 44060 T: 440-942-9118 F: 440-942-9618
Hadrian Inc., 3602 West Washington Street, Suite 200, Phoenix, AZ, 85009 T: 440-942-9118 F: 440-942-9618

08/2023

Maintenance Procedure

FOR STAINLESS STEEL & EMBOSSED STAINLESS STEEL

1. The best method of maintaining your high quality Hadrian Stainless Steel and Embossed Stainless Steel toilet partitions is frequent regular cleaning. Surfaces should be cleaned with a mild detergent or ammonia solution, rinsed with clear water (preferably warm/hot) and wiped dry. Never attempt to clean stainless steel with a steelwool cleaning pad, wire brush, or cleaning agents containing harsh abrasives.
2. If dirt build-up must be removed, use a metal cleaner specifically recommended for stainless steel. Deposits which require scouring may be removed with a mild abrasive powder such as the household cleaner, Ajax. Grease, oil and/or fingerprints may be removed with detergent and water, plus a solvent (i.e. acetone, kerosene, mineral spirits, etc.). Be sure to rub in the direction of the grain of the metal.
3. It is important to rinse stainless steel with clear water and wipe the surfaces with a soft cloth after cleaning to remove all traces of the cleaning agent. Again, rubbing and wiping should be done in the direction of the polished lines, not against them.
4. For any other assistance in maintaining the "bright look" of Stainless Steel and Embossed Stainless Steel toilet partitions, please call your local Hadrian representative.
5. If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.


Solid Colors




Anti-Graffiti Colors *(Subject to upcharge)*

Proven ASTM D6578 Graffiti Resistance to easily remove:

Permanent Marker • Lipstick
• Water Based Ink Marker •
Wax Crayon • Spray Paint

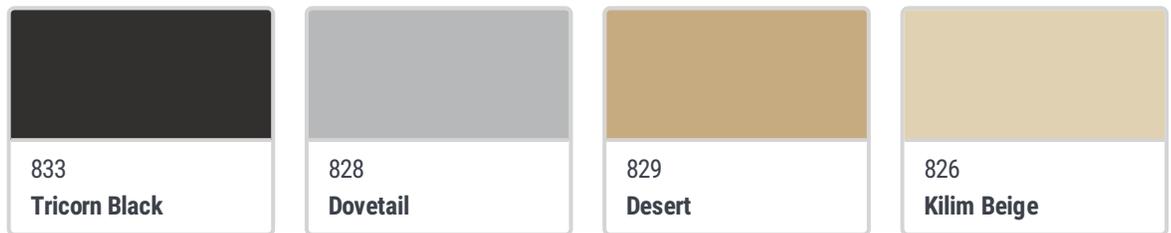

Special Effects Colors *(Subject to upcharge)*

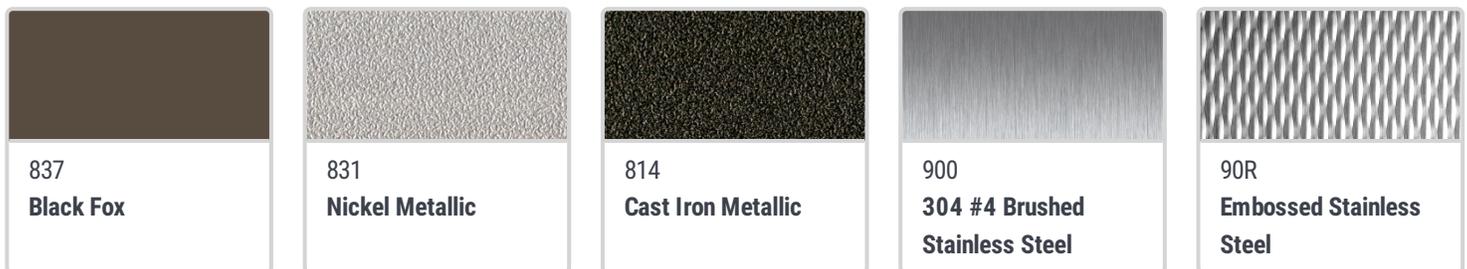

Stainless Steel *(Subject to upcharge)*

★ Headrail braced toilet partitions available for Premium Quick Ship in USA; subject to upcharge.

🇺🇸 Headrail braced, ceiling hung (for 9 ft ceilings and lower) and floor mounted toilet partitions available for Quick Ship in USA.

🇨🇦 Headrail braced toilet partitions available for Quick Ship in Canada.

For custom colors, a minimum of 20 units for toilet partitions and 100 units for lockers is required per color. Custom colors are subject to upcharge.

Colors shown are approximations only. For accurate color matches, refer to Hadrian's printed color card. Hadrian reserves the right to change colors and/or finishes without prior notice.