


Hard to Scratch. Easy to Clean



PHENOLIC COMPACT GRADE LAMINATE

Material Specification: Solidly fused plastic laminate with matt-finish melamine surfaces; integrally bonded colored face sheets and black phenolic-resin core.

- Scratch, moisture, impact and graffiti resistant
- Class A or B ASTM E 84 classification
- Wide selection of colors and patterns

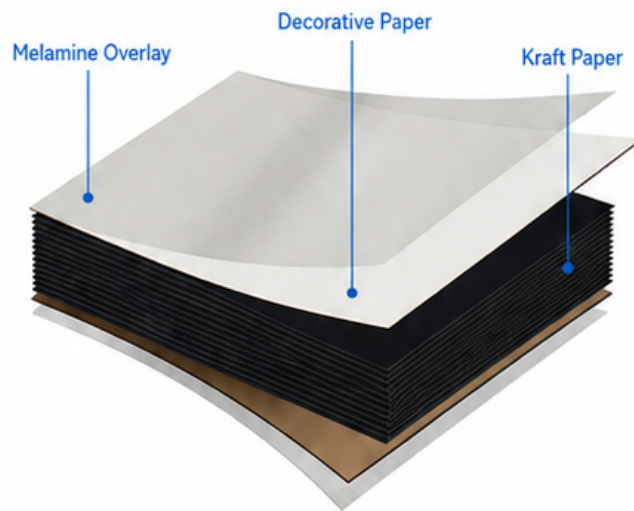

Hardware



STANDARD HARDWARE



HARDWARE OPTIONS

Full-Height Brackets



Full-Height Hinges



Occupancy Indicator Latch

(Standard with Extended Privacy, Systems)



MOUNTING CONFIGURATIONS



☐ Floor-Anchored

Floor-Anchored

Pilaster mount to the floor and walls only floor only. (requires proper floor structure)



☒ Overhead-Braced

Overhead-Braced

A continuous aluminum headrail ties pilasters together at the top for added rigidity. (most common style)



☐ Floor-to-Ceiling

Floor-to-Ceiling

Pilasters span full height, anchored at both floor and ceiling.



☐ Ceiling-Hung

Ceiling-Hung

Pilasters mount to ceiling and walls only. Floor stays clear for easy cleaning. (requires structural backing)

HEIGHT OPTIONS



Standard Height:
58" doors & panels,
12" floor clearance

Standard (58")



☐ **Maximum Height:**
71 ¾" doors & panels,
4 ½" floor clearance

Maximum (71 ¾")



☐ **Extended Height:**
72" to 96" doors & panels,
1" floor clearance

Extended (72-96")

GAP OPTIONS



Standard Reduced-Gap:
± $\frac{3}{32}$ " door-to-stile gaps,
½" to 1" wall gaps
Available On: All Systems

Standard Reduced-Gap



☐ **Gap-Free Doors & Stiles:**
Interlocking, sightline-free design
Available On: DuraLineSeries CGL,
SierraSeries SCRC

Gap-Free Doors & Stiles




BUILDING VALUE SINCE 1906



COMPACT GRADE LAMINATE (CGL) STANDARD COLORS & PATTERNS

Single Piece Panels Available Up To 5'




Dove Grey with
Dove Grey Core
D92-SC-60SC ¹




Satin Stainless with
Dove Grey Core
4830-SC-60SC ¹



Satin Stainless with
Black Core
4830-60




White
949-58



Grey Grit
P-886-CA



Pewter Mesh
4878-60



Citadel Warp
5882-58



Navy Grafix
7018-58



Graphite Grafix
515-58




Black Stone
P-500-CA



Black
909-58

¹ Wilsonart® SOLICOR™ is a specialty laminate with a solid color core to match the surface. Base color upcharge applies to all Solicor. Premium color upcharge applies to Satin Stainless with Dove Grey Core and Designer White with White Core.

Single Piece Panels Available Up To 6' ²



Ice White
410-SEI




Sand
414-SEI



Light Grey
478-SEI



Pearl Grey
475-SEI




Brushed Aluminum
0328-FH



Charcoal
0077-FH




Silvretta
0229-FH



Cello
0811-FH

Additional Colors: Solid Color CGL - Wilsonart® Solicor™ Colors & Patterns

Non-stock; made to order, lead times and color upcharge premiums apply. Samples can be requested from the manufacturer.



Designer White with
White Core
D354-SC-60SC ¹



Pressed Linen
4991-SC-60SC ¹



High Line
7970-SC-60SC ¹



Phantom Ecru
8212-SC-60SC ¹



Field Elm
7999-SC-60SC ¹



¹ Wilsonart® SOLICOR™ is a specialty laminate with a solid color core to match the surface. Base color upcharge applies to all Solicor. Premium color upcharge applies to Satin Stainless with Dove Grey Core and Designer White with White Core.

² Standard color by ABET LAMINATI and FUNDERMAX® allows for single panel width up to 72", eliminating use of additional hardware. Meets Class A fire rating without upcharge.

Hundreds of additional CGL colors are available from our partners; additional lead time will apply. Please consult with ABET LAMINATI®, ARBORITE®, FORMICA®, Wilsonart® or FUNDERMAX for color options. Non-stock Abet Laminati or FUNDERMAX colors carry a significant lead time of 10-14 weeks.

ABET LAMINATI is a trademark of ABET Inc. and ABET LAMINATI S.p.A. ARBORITE and Wilsonart are registered trademarks of Wilsonart Engineered Surfaces and Wilsonart International, Inc. SOLICOR is a trademark of Wilsonart Engineered Surfaces and Wilsonart International, Inc. FORMICA and the FORMICA Anvil logo are registered trademarks of The Diller Corporation. © 2015 The Diller Corporation. FUNDERMAX is a registered trademark of FUNDERMAX GmbH.

MATERIAL OVERVIEW

Scratch, Dent and Graffiti Resistance


Compared to competitive materials, Bobrick materials perform exceptionally well for scratch, dent and graffiti resistance when subjected to industry-standard ASTM test protocols. Consider the relative price of Bobrick’s high performance substrates and it’s clear: Bobrick materials are the pinnacle of value.

	Material	Price Index	Scratch Resistance ASTM D 2197 Weight Required to Scratch	Impact Resistance ASTM D 2794 Visible Damage, Inches-Pounds Per Force (lbf)	Graffiti Resistance ASTM D 6578 Marks Removed (Out of 6)	Interior Finish Classification ASTM E 84
Bobrick Material	Compact Grade Laminate (CGL) (Black Core)	\$\$ - \$\$\$	 >10kg	168" -lbf 	5 	Class A or B
Other Manufacturers' Materials	Powder-Coated Metal	\$	 <0.5kg	2" -lbf 	4 	Class A
	Plastic (HDPE)	\$\$	 <0.5kg	<1" -lbf 	3 	In 48 states and Washington, D.C., ASTM E 84 is not the relevant test. Must pass an unmodified NFPA 286 test.
	Stainless Steel	\$\$\$\$\$	 1.0kg	2" -lbf 	5 	Class A

Bobrick Material



Compact Grade Laminate (CGL)

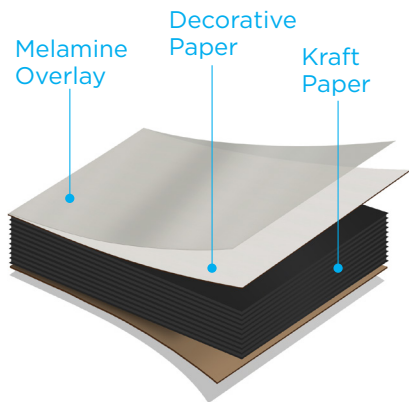

Material Specification:

Solidly fused plastic laminate with matte-finish melamine surfaces; integrally bonded colored face sheets and black phenolic-resin core.


- Scratch, moisture, impact and graffiti resistant
- Class A or B ASTM E 84 classification
- Wide selection of colors and patterns

Available on: Evolve Cubicles, Traditional DuraLineSeries®

Other Manufacturers' Materials



Powder-Coated Metal



Plastic (HDPE)



Stainless Steel