

DESIGN + DURABILITY

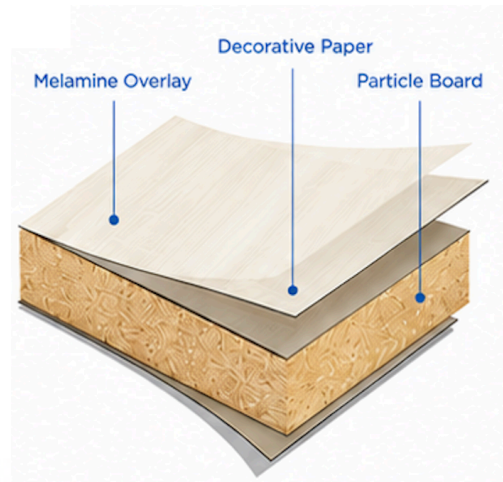


HIGH PRESSURE LAMINATE (HPL)

Material Specification: High Pressure Laminate with a 45 lb density, industrial grade, resin-impregnated particle board substrate. Wood Veneer Laminate substitutes decorative paper with wood veneer.

- 1" doors, stiles and panels
- Impact and graffiti resistant
- Class B ASTM E 84 classification

Available on: PRIVADA® Cubicles, plus Traditional DesignerSeries® and Budget HPL Series in the U.S. only.



Hardware



STANDARD HARDWARE



HARDWARE OPTIONS

Full-Height Brackets



Full-Height Hinges



Occupancy Indicator Latch (Standard with Extended Privacy, Systems)



MOUNTING CONFIGURATIONS



☐ Floor-Anchored

Floor-Anchored

Pilaster mount to the floor and walls only floor only. (requires proper floor structure)



☒ Overhead-Braced

Overhead-Braced

A continuous aluminum headrail ties pilasters together at the top for added rigidity. (most common style)



☐ Floor-to-Ceiling

Floor-to-Ceiling

Pilasters span full height, anchored at both floor and ceiling.



☐ Ceiling-Hung

Ceiling-Hung

Pilasters mount to ceiling and walls only. Floor stays clear for easy cleaning. (requires structural backing)

HEIGHT OPTIONS



Standard Height:
58" doors & panels,
12" floor clearance

Standard (58")



Maximum Height:
71 3/4" doors & panels,
4 1/2" floor clearance

Maximum (71 3/4")



Extended Height:
72" to 96" doors & panels,
1" floor clearance

Extended (72-96")

GAP OPTIONS



Standard Reduced-Gap:
 $\pm 3/32$ " door-to-stile gaps,
1/2" to 1" wall gaps
Available On: All Systems

Standard Reduced-Gap



Gap-Free Doors & Stiles:
Interlocking, sightline-free design
Available On: DuraLineSeries CGL,
SierraSeries SCRC

Gap-Free Doors & Stiles













BUILDING VALUE SINCE 1906



TOILET
PARTITIONS.COM



HIGH PRESSURE LAMINATE (HPL) STANDARD COLORS & PATTERNS

					
Designer White D354-60	Natural Almond D30-60	Beige 1530-60	Otter 3202-58	Shadow D96-60	Slate Grey D91-60
					
Moonstone 7872-58	Grey 1500-60	Platinum D315-60	Mouse 928-58	Terril 2297-58	Black 1595-60
					
White Carrara 4924-38	Neutral Weft 5875-58	Flax Gauze 7708-58	Desert Zephyr 4841-60	Cardboard Solidz 7813-58	Pewter Mesh 4878-38
					
Sheer Mesh 4876-38	Classic Linen 4943-38	Satin Stainless 4830K-18*	Citadel Warp 5882-58	White Ash 8841-58	Field Elm 7999-60*
					
Danish Maple 8906-58	Millennium Oak 5887-58	Bleached Legno 8845-58	Smoky Brown Pear 5488-58	Blackened Steel 8918-58	



LAMINART
A WILSONART COMPANY

*Premium HPL colors carry an upcharge. Panels over 60" wide with directional patterns and finishes will be spliced, joining the 2 pieces on the particle board at an additional charge. HPL colors are printed reproductions and are for descriptive purposes only. Refer to manufacturer's samples for absolute color fidelity. Refer to bobrick.com and iBob for additional information on lead times on Wilsonart and FORMICA colors.

Wilsonart is a registered trademark of Wilsonart International, Inc.; FORMICA, and the FORMICA Anvil logo are registered trademarks of The Diller Corporation. © 2015 The Diller Corporation. Laminart is a trademark proprietary to Laminart LLC.

MATERIAL OVERVIEW


Scratch, Dent and Graffiti Resistance

Compared to competitive materials, Bobrick materials perform exceptionally well for scratch, dent and graffiti resistance when subjected to industry-standard ASTM test protocols. Consider the relative price of Bobrick’s high performance substrates and it’s clear: Bobrick materials are the pinnacle of value.


	Material	Price Index	Scratch Resistance ASTM D 2197 Weight Required to Scratch	Impact Resistance ASTM D 2794 Visible Damage, Inches-Pounds Per Force (lbf)	Graffiti Resistance ASTM D 6578 Marks Removed (Out of 6)	Interior Finish Classification ASTM E 84
Bobrick Material	High Pressure Laminate (HPL) ²	\$ - \$\$\$\$	 >5.3kg	22" -lbf 	6 	Class B
Other Manufacturers' Materials	Powder-Coated Metal	\$	 <0.5kg	2" -lbf 	4 	Class A
	Plastic (HDPE)	\$\$	 <0.5kg	<1" -lbf 	3 	In 48 states and Washington, D.C., ASTM E 84 is not the relevant test. Must pass an unmodified NFPA 286 test.
	Stainless Steel	\$\$\$\$\$	 1.0kg	2" -lbf 	5 	Class A

² Not applicable for Wood Veneer Laminate

Bobrick Material



High Pressure Laminate (HPL)

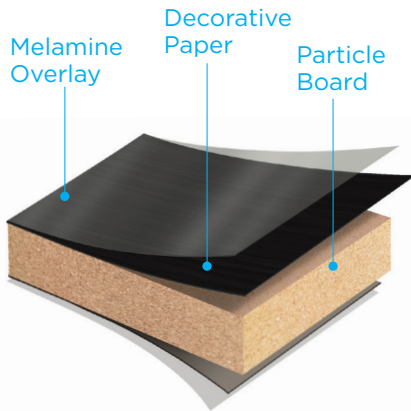


Material Specification:

High Pressure Laminate with a 45 lb density, industrial grade, resin-impregnated particle board substrate. Wood Veneer Laminate substitutes decorative paper with wood veneer.


- 1" doors, stiles and panels
- Impact and graffiti resistant
- Class B ASTM E 84 classification

Available on: PRIVADA® Cubicles, plus Traditional DesignerSeries® and Budget HPL Series in the U.S. only.

Other Manufacturers' Materials



Powder-Coated Metal



Plastic (HDPE)



Stainless Steel