Quote #17026962-1

Standard Freight Included: 75044 Zip Code

All Hardware and Anchors Included

Doors, Dividers, Pilasters Included



Powder Coat 3 year warranty

Delivered in 3-6 business days (Quick Ship colors only); Standard colors in 12-18 business days \$6,552.43

Price includes materials and hardware

Product Info | Color Chart

Date: 10/03/2023



Plastic Laminate 2 year warranty

Delivered in 5-10 business days

\$8,162.67

Price includes materials and hardware

Product Info | Color Chart



Solid Plastic 25 year warranty

Delivered in 18-22 business days

\$11,243.02

Price includes materials and hardware

Product Info | Color Chart



Stainless Steel 5 year warranty

Delivered in 3-6 business days

\$13,070.67

Price includes materials and hardware

Product Info | Color Chart



Phenolic 25 year warranty

Delivered in 6-10 business days

\$13,010.72

Price includes materials and hardware

Product Info | Color Chart



Submittal Notes


Toilet Partition Notes


- 1. Compartment widths on drawings are shown at center line of panels.
- 2. Compartment depths on drawings are shown from front face of pilaster to finished wall.
- 3. Cut headrail in field to suit (if applicable).
- 4. "X" on drawings indicates that backing is required.
- 5. Fabrication will not commence until approval has been received.
- 6. Material supplied will conform to the dimensions indicated on drawings.
- 7. Scale of drawings none.

hadrian-inc.com PAGE 2 OF 14

 Project Title
 CJ NISBIT - LANCE
 Created By
 Javier Solis
 Last edit date
 11/08/2023
 Distributor
 Fry Specialty Inc.

Drawing TitleMENSDate Printed11/08/2023Quote NumberQ0611623.001

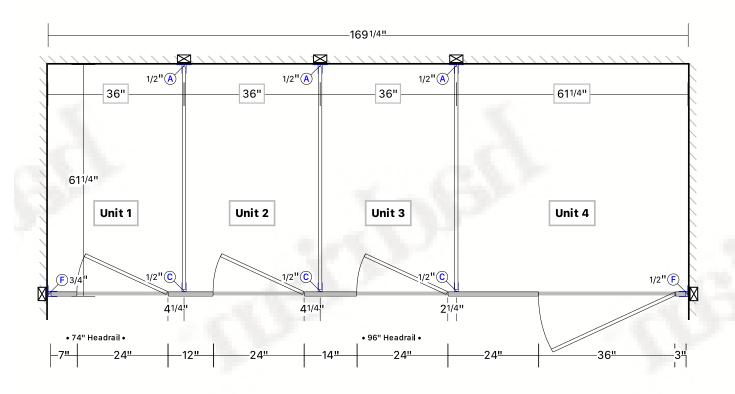



Location of urinal screen(s) may not be correctly reflected in this drawing

LEGEND	A H Bracket AS Screen H Bracket C U Clip F Pilaster F Bracket					
Product Toilet Partitions	Material Powder Coated	Finish TBA - Color TBA	Partition Headrail Braced			
Series Standard	AFF 12"	Hardware Standard Chrome	Options None			
Sightline Option None	Hinge Concealed	Latch Concealed				


- Unit widths are shown at center line of panels.
- Unit depths are shown from front face of pilaster to finished wall.
- Material supplied will conform to the dimensions indicated.
- indicates that backing is required.


Scale = none.

- Cut headrail to suit (if necessary).
- Indicates location of pilaster reinforcing channel(s).

 Project Title
 CJ NISBIT - LANCE
 Created By
 Javier Solis
 Last edit date
 11/08/2023
 Distributor
 Fry Specialty Inc.

Drawing Title WOMENS Date Printed 11/08/2023 Quote Number Q0611623.001

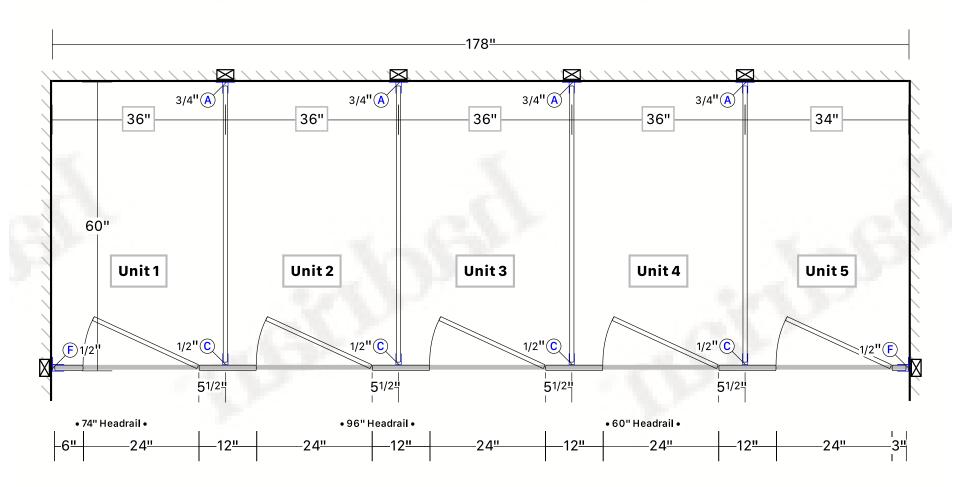



- Unit widths are shown at center line of panels.
- Unit depths are shown from front face of pilaster to finished wall.
- Material supplied will conform to the dimensions indicated.
- indicates that backing is required.

Scale = none.

- Cut headrail to suit (if necessary).
- Indicates location of pilaster reinforcing channel(s).

Project Title CJ NISBIT - LANCE

Created By Javier Solis


Last edit date 11/08/2023

Distributor Fry Specialty Inc.

Drawing Title WOMENS PART 2

Date Printed 11/08/2023

Quote Number Q0611623.001

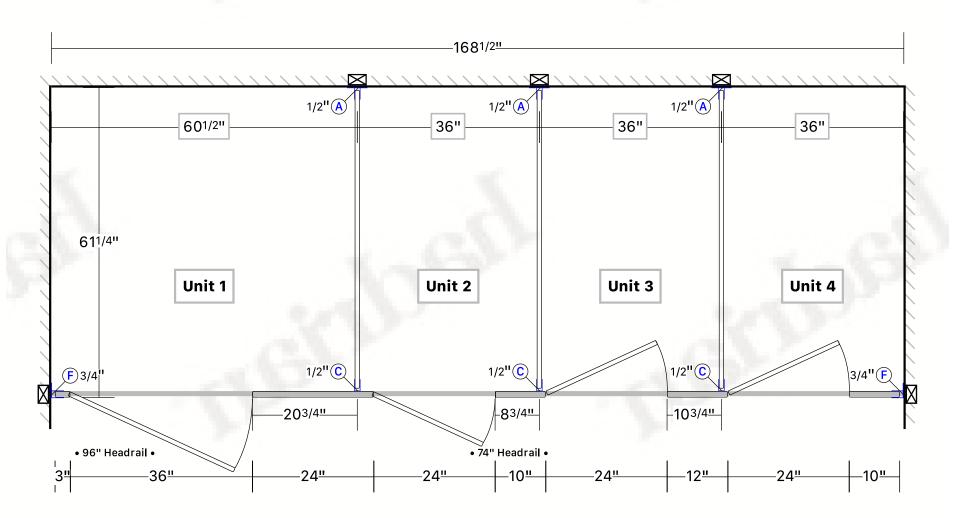

LEGEND	A H Bracket C U Clip F Pilaster F Bracket			
Product Toilet Partition	ons	Material Powder Coated	Finish TBA - Color TBA	Partition Headrail Braced
Series Standard		AFF 12"	Hardware Standard Chrome	Options None
Sightline Option Non	е	Hinge Concealed	Latch Concealed	

- Unit widths are shown at center line of panels.
- Unit depths are shown from front face of pilaster to finished wall.
- Material supplied will conform to the dimensions indicated.
- indicates that backing is required.


Scale = none.


- Cut headrail to suit (if necessary).
- Indicates location of pilaster reinforcing channel(s).



Recommended Methods for Attaching to a Wall

The details below demonstrate the recommended methods for attaching panels and pilasters to common wall types. Other wall types may be encountered. In all cases, proper wall backing is required to achieve a successful toilet partition installation.

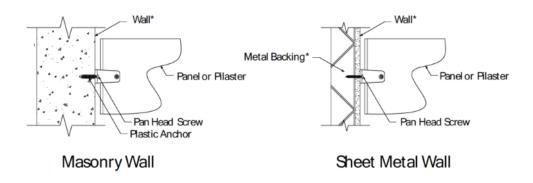



^{*}Not Supplied by Hadrian



Material Specification

HEADRAIL BRACED - POWDER COATED METAL TOILET PARTITIONS - STANDARD

1.01 Construction Features

Doors, Panels and Pilasters shall be constructed of two sheets of panel flatness zinc - coated galvanneal steel, ASTM A653 GR33, laminated under pressure to a honeycomb core for sound deadening and rigidity. Formed edges to be welded together and inter-locked under tension with a roll - formed oval crown locking bar, mitred, welded and ground smooth at the corners. Honeycomb to have a maximum 25 mm(1") cell size.

1.02 Doors

Shall be 1461mm (57.5") high and 25mm (1") thick with cover sheets not less than 0.8mm (.030").

1.03 Panels

Shall be 1461mm (57.5") high and (1") thick with cover sheets not less than 0.8mm (.030").

1.04 Pilasters

Shall be 32mm (1.25") thick with cover sheets not less than 0.8mm (.030").

1.05 Headrail

Shall be 25mm (1") by 41mm (1.625") extruded anodized aluminum with anti-grip design. Wall thickness to be 1.5mm (.060") and shall be securely attached to wall and pilasters with manufacturer's fittings in such a way as to make a strong and rigid installation. All joints in headrails shall be made at a pilaster.

1.06 Pilaster Fastening Method

Pilasters shall be securely and rigidly fastened to the floor and fitted with a jack levelling screw for vertical adjustment. The floor fastening shall be concealed and protected by a 102mm (4") high, die-formed stainless steel pilaster shoe.

1.07 Hardware and Fittings

All panel and pilaster brackets and all door hardware shall be chrome plated zinc die castings.

Fasteners are zinc plated 12 x 1-3/4" and 12 x 5/8" TR-27 6-lobe security screws.

Doors shall be equipped with chrome plated zinc die cast gravity type hinges, mounted on upper and lower pilaster hinge brackets. Threaded top hinge pin shall be metal with a self-lubricating nylon sleeve. Door hinges shall be fully concealed within the thickness of the door and adjustable to permit the door to come to rest at any position when not latched.

Coat Hook and Bumper: Each door to be fitted with a combined coat hook and bumper. Finish to match other hardware items.

Latch to be a concealed, chrome plated zinc die casting with face mortised flush with edge strip of door.

The combined stop and keeper shall have a 19mm (0.75") diameter bumper locked in place. Finish to match other hardware items. Pilaster shoes to be stainless steel with a #4 brushed finish.

1.08 Finish

All sheet metal to be thoroughly cleaned, phosphated and finished with a high performance powder coating, baked on to provide a uniform smooth protective finish. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): MENS, WOMENS, WOMENS PART 2



WALL MOUNTED - POWDER COATED METAL URINAL SCREENS - STANDARD

1.01 Construction

Screens shall be constructed of two sheets of panel flatness zinc-coated galvanneal steel, ASTM A653 GR33, laminated under pressure to a honeycomb core for sound deadening and rigidity. Formed edges to be welded together and inter-locked under tension with a roll-formed oval crown locking bar, mitred, welded and ground smooth at the corners. Honeycomb to have a maximum 25mm (1") cell size.

1.02 Wall Mounted

Screens shall be 25mm (1") thick with cover sheets not less than 22-gauge (0.8mm / .030"). Screens shall be 457mm (18") or 610mm (24") deep by 1219mm (48") high and anchored into the wall approximately 305mm (12") off the floor.

1.03 Hardware & Fittings

Screens shall be fastened to the wall with double-ear brackets that are chrome plated zinc die cast. Floor mounted with pilaster and floor to ceiling mounted with post to be fastened to the front support with "U" brackets that are chrome plated zinc die cast.

1.04 Finish


All sheet metal to be thoroughly cleaned, phosphated and finished with a high performance powder coating, baked on to provide a uniform smooth protective finish. Color shall be as selected from Hadrian's color card.

This specification applies to room(s): MENS

hadrian-inc.com PAGE 8 OF 14



Metal Toilet Partitions Standard Series - Headrail Braced - 12" [305mm] AFF Chrome - Concealed Latch & Concealed Hinge

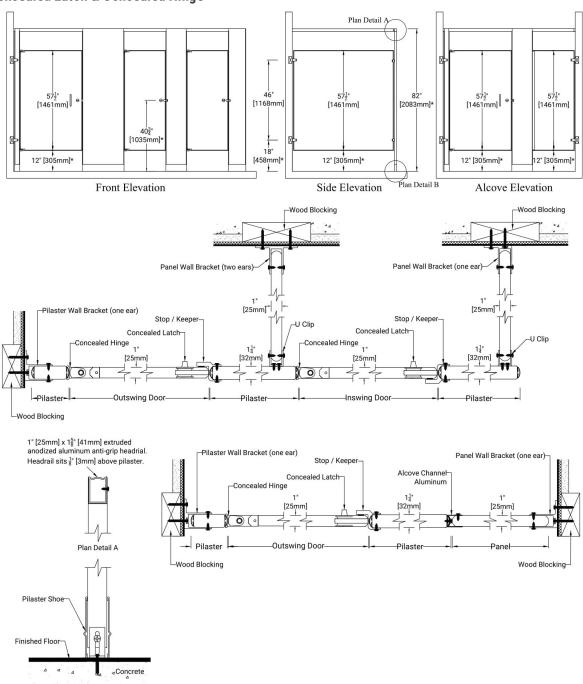

Important Notes:

Refer to final drawings for wood blocking information. Wood blocking is critical to ensure a rigid installation. See material specifications for material and hardware finishes.

Plan Detail B

hadrian-inc.com


^{*}Above finish floor dimensions may vary due to floor level and cam position




Metal Urinal Screens

Standard Series - Wall mounted 12" [305mm] AFF

Stirrup Bracket Installation

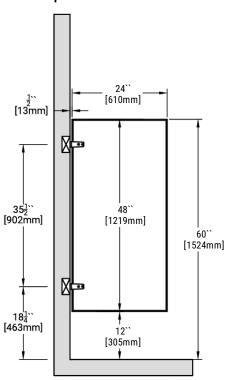



Available Panel Depths

18`` [457mm]

24`` [610mm]



Warranty Information

Project Name: CJ NISBIT - LANCE

Hadrian Manufacturing Inc. ("Hadrian") provides the following warranty with respect to Hadrian toilet partitions and lockers.

Subject to the terms set out herein, the products are warranted against defects in material and workmanship from the date of receipt by the authorized Hadrian distributor for the applicable warranty periods outlined below:

Powder Coated Toilet Partitions: 3 years
 Stainless Steel Toilet Partitions: 5 years
 Solid Plastic Toilet Partitions: 25 years
 Emperor (corridor) Lockers: 2 years
 Gladiator (athletic) Lockers: 5 years
 Replacement Front Lockers: 2 years

The warranty is for Hadrian material only and excludes damages caused by installation errors, vandalism, improper usage, improper maintenance, exposure to harsh environments or chemicals (such as chlorine, bromine, etc.) or failure of the building structure to adequately support the product. Site preparations (i.e. wood blocking, etc.) must meet final drawing specifications and Hadrian's recommended maintenance procedure must be followed.

The exclusive remedy under this warranty shall, at Hadrian's discretion, be replacement or repair of the defective material, Hadrian will not pay any removal, installation or other labour costs associated with the repair or replacement. Replacement material will be warranted for the unused portion of the original warranty period.

No warranty of merchantability or fitness for a particular purpose is made or implied. In no event shall Hadrian be liable for any other costs or damages, including loss of profit, loss of revenue, indirect, incidental, special or consequential damages howsoever arising, wither under warranty, contract, statue, tort, equity or otherwise.

This warranty extends only to the original customer and is non-transferable. Warranty claims must be made during the applicable warranty period and initiated by contacting Hadrian at the following coordinates: USA: 440-942-9118/CANADA: 905-333-0300.

The foregoing constitutes the entire warranty given by Hadrian and no one is authorized to change or expand this warranty on behalf of Hadrian.

hadrian-inc.com



Maintenance Procedure

FOR POWDER COATED PAINTED FINISH

MAINTENANCE OF YOUR TOILET PARTITIONS SHOULD BE A PART OF YOUR REGULAR BUILDING PREVENTIVE MAINTENANCE PROCEDURE

- 1. Tighten any screws that have become loose due to vibrational forces or attempted vandalism.
- 2. Check the top door pin to be sure it is flush with the top of the hinge.
- 3. Be sure the surfaces are dry after being cleaned and rinsed with clear water (when required).
- 4. Partitions exposed to severe humidity should be washed and dried frequently. If partitions are in a shower room, a coat of paste wax is recommended on painted surfaces.
- 5. Periodically, remove any dirt, grime or foreign matter with a soft cloth.
- 6. Where surfaces reveal spotting resulting from hand perspiration, soil, or grease, a thorough cleaning with warm water and a mild detergent (ie. Ivory Soap), followed by rinsing, and removal of excess moisture, will renew the clean even surface, providing a pleasant sanitary appearance. (Use of cleaning agents containing abrasives such as household cleaning powder, steel wool, and harsh detergents or acids ARE NOT RECOMMENDED).
- 7. To maintain the brilliance of hardware, these components can be periodically improved by an application of non-abrasive cleaner with a damp cloth.
- 8. Where additional gloss and protection is desirable, light applications of commercial liquid or paste waxes are highly recommended.
- 9. If your partitions have a continuous hinge, regular application of an LPS II or an industrial type, non-drying lubricant is recommended.


hadrian-inc.com PAGE 12 OF 14



POWDER COATED METAL COLOR CARD

QUICK SHIP COLORS

*Delivered in 3-6 Business Days

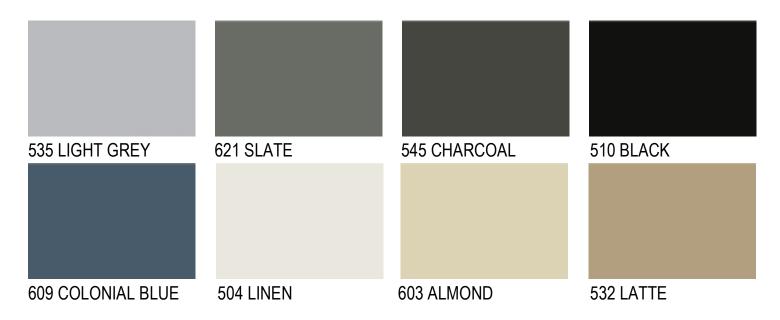

STANDARD COLORS

*Delivered in 12-18 Business Days

