


MODEL No:	0952	
ISSUED:	1-87	
REVISED:	6-07	

RECESS MOUNTED MEDICINE CABINET WITH MIRROR SWING-DOOR

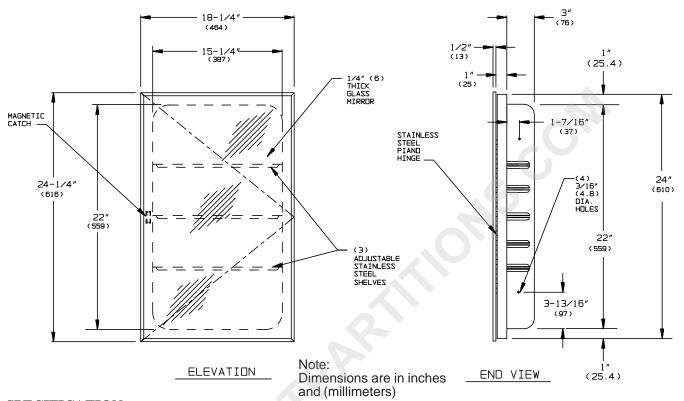

SPECIFICATION

Recess Mounted Medicine Cabinet with Mirror Swing-Door shall have channel frame door and cabinet fabricated of 22 gauge stainless steel type 304 alloy 18-8. Cabinet interior shall have radius corners and shall be provided with three (3) removable stainless steel shelves. Interior face trim shall be one-piece construction with no miters and no exposed fasteners or welded seams. Mirror glazing shall be 1/4" (6) thick polished float glass and shall have a fifteen (15) year warranty against silver spoilage. Door channel frame shall be attached to cabinet with a full-length, heavy-duty stainless steel piano hinge and shall be held closed by a magnetic catch. Cabinet shall have two (2) rubber door silencers.

Recess Mounted Medicine Cabinet with Mirror Swing-Door shall be Model № 0952 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Unit is mounted in rough wall opening (RWO) using four (4) N° 10 self-tapping screws (by others) through concealed mounting holes provided in cabinet sides. Typical mounting height is 46" (1168) from bottom of mirror door above finish floor (AFF) or 12" (305) above lavatory counter top. For compliance with ADA Accessibility Guidelines, install unit so that bottom edge of reflecting surface is no higher than 40" (1016) AFF. Note that bottom edge of reflecting surface is 3/4" (19) below RWO. Invert cabinet to change left hand swing (shown) to right hand swing as required.

RWO required is 16" W x 22-3/4" H x 3-1/2" D (406 x 578 x 89)

OPERATION

User pulls door to access contents and manually pushes door shut. Adjust shelf spacing by removing shelves and reinserting in any of five (5) internally embossed tracks on each side of cabinet interior.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS,INC.