

□ Model 344 — Recessed **Braclex**[®] (Waste container projects 4¾")

- □ Model 344-10 Semi-Recessed (recesses 2"; projects 6³⁄₄")
- □ Model 344-11 Surface-Mounted (projects 8³⁄₄")

🗹 Standard Series — Satin Finish

12-Gallon Capacity

Product Materials

FLANGE: 22 gauge stainless steel with exposed surfaces in architectural satin finish. One-piece seamless construction, 1" wide with ¼" return. **CABINET:** heavy gauge stainless steel. All welded construction.

WASTE CONTAINER: 22 gauge stainless steel. All welded construction. Secured to cabinet with tumbler lock keyed like other Bradley units.

LINER: (optional) heavy-duty stitched vinyl-coated nylon.

HINGED COVER: (optional) 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge.

PUSH FLAP DOOR: (optional) 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge. Self-closing flap door is embossed PUSH.

Capacity

12 gal. (1.6 cu. ft.)

Operation

Receptacle removable for servicing by unlocking waste container.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15[%]"W x 29[%]"H x 4"D (Semi-recessed unit only 2" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed waste receptacle shall be fabricated of heavy gauge stainless steel with seamless exposed surfaces in satin finish. Removable 12-gal. stainless steel waste receptacle secured to cabinet with tumbler lock. Heavy duty vinyl liner is optional.

Overall dimensions: 171/8"W x 305/8"H x 83/4"D.



Optional Features

	Suffix	
	Hinged cover	-35
	Hinged cover with push flap door	-65
	Vinyl Liner Part #P11-004	


🔄 ADA Compliant

Consult local and national accessibility codes for proper installation guidelines.

Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **Braclex**[®] will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 2 2/28/2011 This information is subject to change without notice. Bradley_WasteReceptacle_344_10_11 © 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com

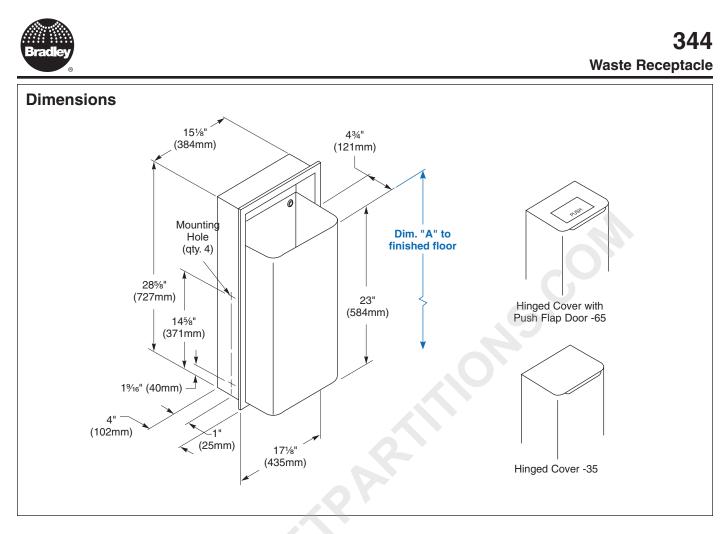

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening			
Waste receptacle top lip	36" (914mm)	41¾" (1060mm)	12%" (321mm)			
to finished floor	32" (813mm)	37¾" (959mm)	85⁄8" (219mm)			
	28" (711mm)	33¾" (857mm)	45⁄8" (117mm)			
Rough wall opening:						
Surface Mount:	No rough opening, see overall dimensions					
Recessed:	15%" (397mm) Wide x 291⁄%" (740mm) High x 4" (102mm) Deep					
Semi-Recessed:	15%" (397mm) Wide x 291⁄%" (740mm) High x 2" (51mm) Deep					

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 2 of 2 2/28/2011 This information is subject to change without notice. Bradley_WasteReceptacle_344_10_11 © 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com