



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 6477

ISSUED: 1-87

REVISED: 11-04

RECESSED TOILET SEAT COVER DISPENSER

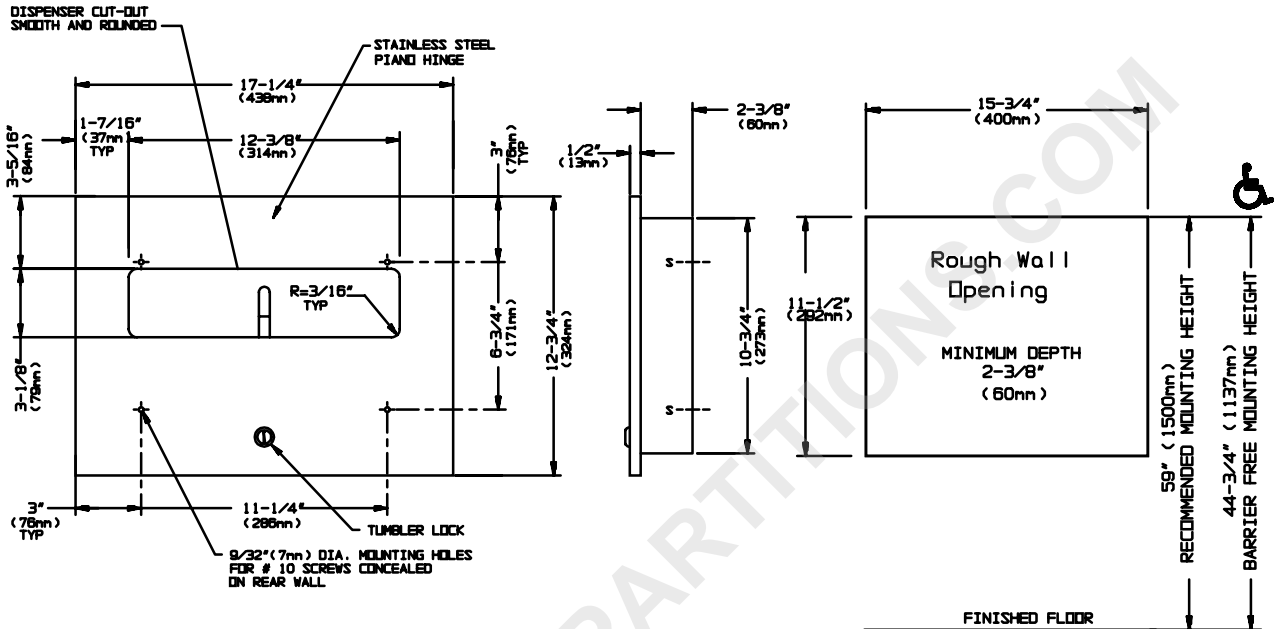

SPECIFICATION

Recessed Toilet Seat Cover Dispenser shall hold and dispense 500 standard single or half-fold paper toilet seat covers contained in supply box and shall have cabinet, frame and door fabricated of alloy 18-8 stainless steel, type 304. Cabinet shall be N°20 gauge with a 1" (25mm) wide perimeter return to lay flat against wall or partition. Door shall be fabricated of 18 gauge with a 1/2" (13mm) square return to wall with no open seams visible on door face. Door shall be attached to top of cabinet with a full length 3/16" (5mm) dia. stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. All exposed surfaces shall be N°4 satin finish and shall be protected during shipment with a PVC film easily removable after installation. Cover dispensing slot shall have a fully deburred flat edge for snag-free dispensing and user safety. Structural assembly of cabinet and door components shall be of welded construction and shall have no exposed fasteners or welded seams.

Recessed Toilet Seat Cover Dispenser shall be Model N° 6477 as manufactured by American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Unit is mounted in wall recess using N° 10 self tapping screws (by others). Mounting holes are provided in side and rear walls of cabinet and are accessible through door for installation. Note that top of dispenser slot is 2-1/2" (64mm) below top of rough wall opening.

Rough Wall Opening required is.... 15-3/4"W x 11-1/2"H x 2-1/2"D. (400mm x 292mm x 64mm).

OPERATION

Covers are self-feeding until supply is depleted. Unit is manually reloaded with a full box through access door on schedule determined by maintenance requirements.