


AMERICAN SPECIALTIES. INC.

441 Saw Mill River Road, Yonkers, NY 10701 (914) 476.9000 • (914) 476.0688 www.americanspecialties.com

MODEL №:	7340
ISSUED:	01/87
REVISED:	28 OCT 2016

SINGLE ROBE HOOK

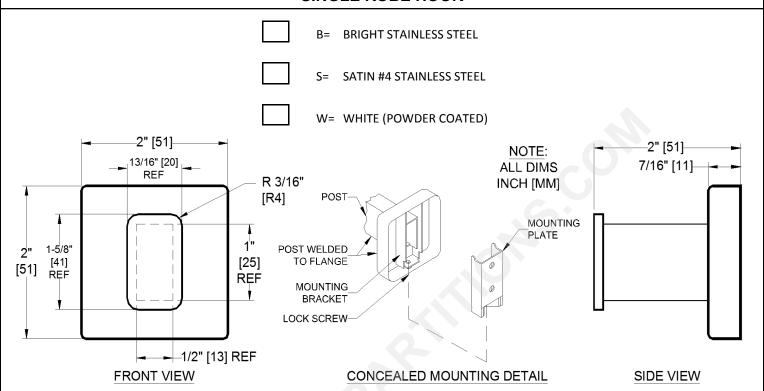

SPECIFICATION

Single Robe Hook shall be fabricated of stainless steel alloy 18-8, type 304. Post shall be 22 gauge, 1/2" x 1" [13 x 25] rectangular tubing with formed 22 gauge mounting flange and bracket welded on end. Cap plate shall be 14 gauge, 3/4" x 1-1/4" [19 x 32] with radiused corners and internally welded to outer end. Mounting plate shall be included and shall be 18 gauge. A stainless steel set screw shall be provided on bottom perimeter of flange to lock unit to mounting plate. Surface finish shall be bright, satin or white powder coated, as chosen by option and indicated by code suffix.

Single Robe Hook shall be Model № 7340-____{specify surface finish code suffix} of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Surface mount unit on door back or wall using two (2) №10 self tapping screws (by others) through holes provided in mounting plate into suitable prepared mountings (by others) or other suitable mounting hardware (by others) to suit door or wall conditions. Hang post and flange assembly on mounting plate and tighten set screw to lock unit to plate. For compliance with ICC/ANSI A-117.1-2003 and 2010 ADA Accessibility Standards, install unit with top of hook 48" [1219] maximum above finished floor (MAX AFF) or 46" [1168] MAX AFF if side reach access over an obstruction (e.g. vanity) with reach depth greater than 10" [254] and less than 25" [635] is only provided or 44" [1118] MAX AFF if forward reach over an obstruction with reach depth greater than 20" [508] and less than 25" [635] is only provided. For general utility, install hook with centerline of mounting plate 68" [1727] AFF.

OPERATION

Hook is suitable for a robe or clothing and small carry bags.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS ...