



- Model 6437 – Liquid Soap
- Model 6437-73 – Foam Soap

- Recessed
- Contemporary Series — Satin Finish
- ADA Compliant

**Product Materials**

**Cabinet:** stainless steel.  
**Faceplate:** 18 gauge stainless steel. Faceplate and soap vessel form one integral piece.  
**Soap Vessel Liner:** molded high impact polystyrene.  
**Liquid Soap Valve:** chrome-plated brass housing with ABS plastic mechanism. Requires less than 5 lbs. of force to dispense soap.  
**Foam Soap Valve:** chrome-plated ABS mechanism. Requires less than 5 lbs. of force to dispense soap.

**Capacity**

50-oz. liquid or foam soap.

**Operation**

Soap dispenser slides open for filling and cleaning. Push-in valve dispenses measured amounts of vegetable or coconut oil liquid soaps, synthetic detergents, antiseptic solutions or foam soap with less than 5 lbs. of force. Sight gauge indicates refill time. Door secured with tumbler lock.

- Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.
- Bradley foam soap valves work with majority of bulk foam soap.

**Installation**

Verify all rough-in dimensions prior to installation. Requires rough wall opening 8-3/4"W x 4-1/2"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

**Guide Specification**

Recessed soap dispenser shall be fabricated of stainless steel with exposed surfaces in satin finish. Faceplate of 18 gauge stainless steel and secured by tumbler lock. Capacity: 50-oz. liquid or foam soap.


**Overall dimensions: 10-1/4"W x 6"H x 4-1/16"D.**

**ADA Compliant**

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

**Service Kits**

Liquid Soap Valve - P15-408  
 Foam Soap Valve - P15-510

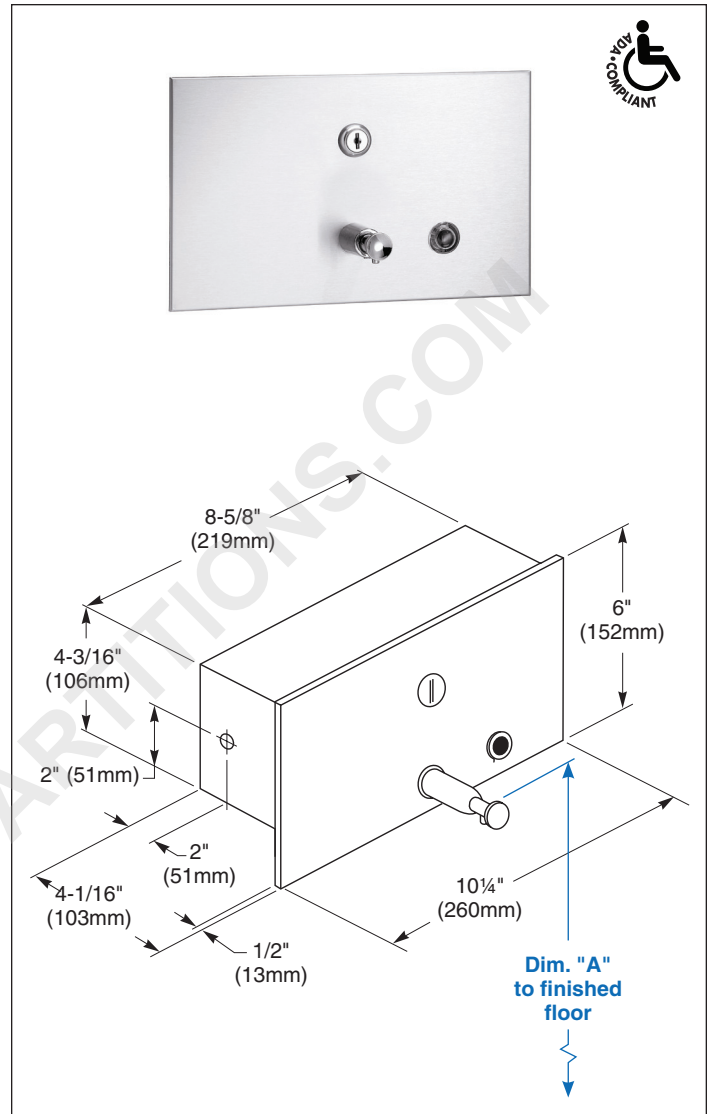

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Push button top to finished floor	40" (1016mm)	43-3/16" (1097mm)	38-11/16" (983mm)
	38" (965mm)	41-3/16" (1046mm)	36-11/16" (932mm)
	36" (914mm)	39-3/16" (995mm)	34-11/16" (881mm)
	34" (864mm)	37-3/16" (945mm)	32-11/16" (830mm)
<b>Rough wall opening:</b>			
Recessed: 8-3/4" (222mm) Wide x 4 1/2" (115mm) High x 4" (102mm) Deep			