



- Adjusts from 3" to 5½" wall thickness only

Product Materials

CABINET: 18 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

FLANGES: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Flange of one-piece seamless construction, 1" wide with ¼" return.

DOORS: 20 gauge stainless steel with exposed surfaces in architectural satin finish. Equipped with full-length stainless steel piano spring hinge and chrome plated brass pull knob. Doors are self-closing.

INTER-LOCK MECHANISM: prevents both doors from being open at same time.

SPILL TRAY: heavy duty, one piece, 22 gauge drawn tray designed to prevent leakage.

Operation

Special interlock mechanism permits only one door to open at a time. Spill tray removes for cleaning.


Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening of 11⅞"W x 10⅞"H. Adjusts to wall thickness of 3" to 5½". Remove one flange and slip unit into wall. Replace flange and secure to cabinet with concealed mounting screws (included) at holes provided. Tighten screws holding opposite flange.

Guide Specification

Specimen pass-thru cabinet shall be fabricated of stainless steel with 20 gauge doors and all exposed surfaces in satin finish. Interlock mechanism permits operation of only one door at a time. Removable stainless steel spill tray.

Overall dimensions: 13⅜"W x 12⅝"H x 6"D.

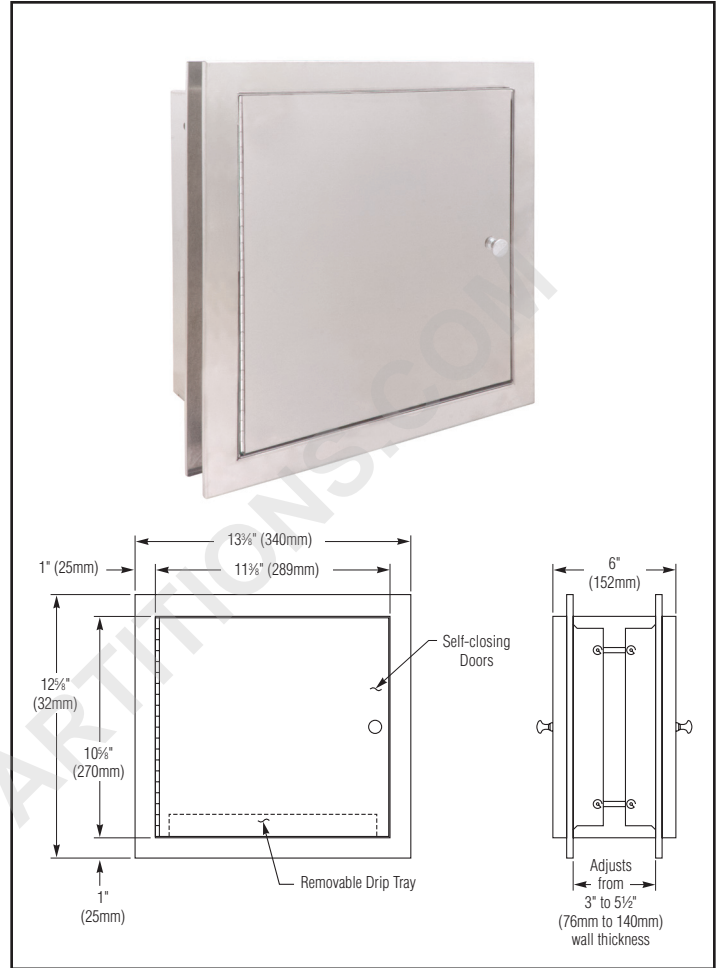

WWW.TOMTRADING.COM

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.