


AMERICAN SPECIALTIES, INC.

441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000 www.americanspecialties.com

| MODEL No: | 1201 | |
|-----------|-------|--|
| ISSUED: | 06-08 | |
| REVISED: | 10-08 | |

CURVED SHOWER CURTAIN ROD WITH MOUNTING BRACKETS

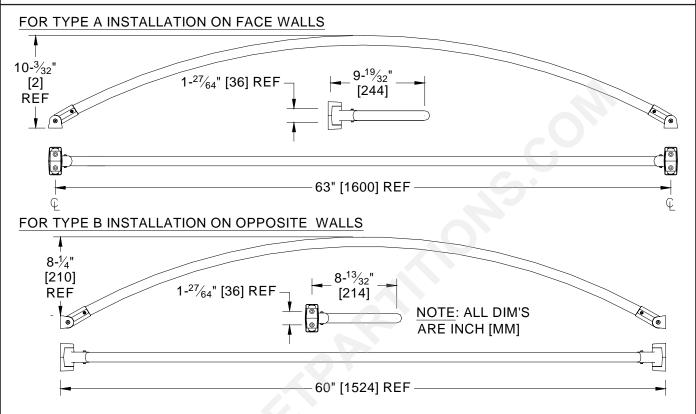

SPECIFICATION

Curved Shower Curtain Rod with Mounting Brackets shall be fabricated of alloy 18-8 stainless steel, type 304. Tubing shall be 18 gauge, 1" OD (\emptyset 25) with a N $^{\circ}$ 4 satin finish and shall be protected during shipment with a plastic bag. Length shall be suitable for a 60" wide enclosure either on opposite walls or across the face opening depending upon rod length chosen. Flanges shall be fabricated of heavy-duty rust proof Zamak 3 with a Chrome finish. Flanges shall have two (2) countersunk 15/64" diameter (\emptyset 6) holes to accept N $^{\circ}$ 10 (M5) flat or oval head screws (by others).

Curved Shower Curtain Rod with Mounting Brackets shall be Model N° 1201-A (or 1201-B) of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

Rod is installed between two (2) mounting brackets and locked against rotation with setscrews (provided) in bracket rod holder bore. Brackets may be mounted on opposing walls at each side of enclosure opening or outside opening across face walls depending upon model chosen. For use with standard shower curtain model N°_{2} 1200-V (order separately) having 72" (1829) length and standard hooks Model N°_{2} 1200-SHU (order separately). Install unit with rod centerline 74-1/2" (1892) AFF or 67" (1702) above tub rim to obtain 6" (152) bottom overlap. Mounting instruction sheet for drywall or masonry wall is included with each unit.

OPERATION

Outwards bow of installed curved rod provides additional 8-1/4" (210) of shoulder room at mid-point of enclosure beyond what a similarly placed straight rod affords. A complete instruction manual is provided with each unit.

| Model Nº | APPLICATION | ROD MOUNTING LENGTH |
|----------|---------------------------------------|------------------------|
| 1201-A | Outside Face Wall Surface Mounting | 61" - 63" [1549-1600] |
| 1201-B | Inside Opposite Wall Surface Mounting | 60" ± 1/2" [1524 ± 13] |

Accessory Specialties AMERICAN DISPENSER Desert Ray Products WATROUS....