

- \square Model 3257 Recessed
- □ Model 3257-10 Semi-Recessed (recesses 1½", projects 2½")
- □ Model 3257-11 Surface-Mounted (projects 4")

Contemporary Series — Satin Finish

2.8-Gallon Capacity

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges. **DOOR:** 18 gauge stainless steel. ½" return for maximum rigidity. Concealed full length stainless steel piano hinge and tumbler lock keyed like other Bradley units.

PUSH FLAP DOOR: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge. **WASTE RECEPTACLE INSERT:** leakproof molded plastic.

Capacity

2.8 gal. (0.37 cu. ft.)

Operation

Waste receptacle insert removable by unlocking cabinet door.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 12%"W x 26%"H x 4"D. Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed waste receptacle shall be fabricated of heavy gauge stainless steel with exposed surfaces in satin finish. Cabinet door of 18 gauge stainless steel with full-length piano hinge and secured by tumbler lock. Removable 2.8-gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 14¼"W x 28¼"H x 4"D.


🔄 ADA Compliant

Consult local and national accessibility codes for proper installation guidelines.

Conformity and compliance to local and national codes is the responsibility of the installer.



Page 1 of 2 2/25/2011 This information is subject to change without notice. Bradley_WasteReceptacle_3257_10_11 © 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com

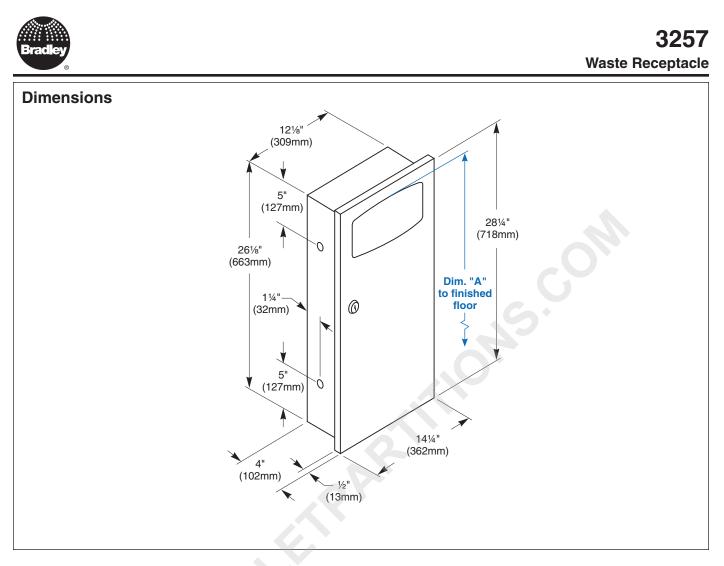

| Dim. "A" Key Surface: | For Dim. "A" | Top of Rough Wall Opening | Bottom of Rough Wall Opening |
|--|---|---------------------------|------------------------------|
| Top of door (5½" door opening) to finished floor | 48" (1219mm) | 49" (1245mm) | 22¾" (568mm) |
| | 45" (1143mm) | 46" (1168mm) | 19¾" (492mm) |
| | 42" (1067mm) | 43" (1092mm) | 16¾" (416mm) |
| | 40" (1016mm) | 41" (1041mm) | 14¾" (365mm) |
| Rough wall opening: | | | |
| Surface Mount: | No rough opening, see overall dimensions | | |
| Recessed: | 125⁄8" (321mm) Wide x 265⁄%" (677mm) High x 4" (102mm) Deep | | |
| Semi-Recessed: | 12%" (321mm) Wide x 26%" (677mm) High x 1½" (39mm) Deep | | |

© 2014 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com