



## Estimate

ADDRESS  
KODIAK CONSTRUCTION  
ATTN: COLLEEN

ESTIMATE 11358  
DATE 04/23/2024

SALES REP  
CHRISTINA 619-635-2888

ACTIVITY	DESCRIPTION	QTY
MATERIAL-EXPENSE	DURALINE PHENOLIC BY BOBRICK PER ATTACHED	
STYLE	FLOOR MOUNTED	
HARDWARE	HARDWARE INCLUDED PER ATTACHED	
COLOR	BLACK CORE SATIN STAINLESS 4830-60	
STALLS	INCLUDED IN PROPOSAL	8
SCREENS	INCLUDED IN PROPOSAL	4
CAN SHIP IN	APPROX. 6-7 BUSINESS DAYS	
STANDARD FREIGHT INCLUDED	BASED ON (1) SINGLE SHIPMENT TO 93012	

\*\*\* SALES TAX WILL BE ADDED IF SHIPPING TO CA, TN, TX, OK, NY, FL, GA, MA, NJ, WA, AZ, MI, MN, NC, VA, IL AND MD.

• QUOTES ARE VALID FOR 30 DAYS  
• QUANTITIES & DESCRIPTIONS NOT GUARANTEED TO AGREE WITH PLANS AND/OR SPECS. IT IS YOUR RESPONSIBILITY TO REVIEW ENTIRE QUOTE/SUBMITTAL PRIOR TO BIDDING YOUR PROJECT. YOU ARE ALSO RESPONSIBLE FOR VERIFYING LOCAL MUNICIPALITY / CODE COMPLIANCE.  
ANY CHANGES MADE CAN IMPACT PRICING.

TOTAL

**\$7,820.00**

Accepted By

Accepted Date

**Shipping Information (PLEASE MARK ALL THAT APPLY):**

- 
- ☐ Ship ASAP
  - ☐ Do NOT Ship Before Date \_\_\_\_/\_\_\_\_/\_\_\_\_
  - ☐ Lift Gate Fee Add. \$125.00  
**(REQUIRED IF NO FORKLIFT OR LOADING DOCK)**
  - ☐ Residential / Non-Commercial Delivery Add. \$95.00\*
  - ☐ Notification call prior to delivery Add \$40.00

**APPROVED:** \_\_\_\_\_

**\* The term "residential/non-commercial" also includes apartments, places of worship, schools, pre-schools, day cares, camps, farms, public storage facilities, business operating within a private residence, and other such locations not generally recognized as commercial locations and shall apply to the entire premises.**



## Technical Data

# DuraLineSeries®

## Compact Grade Laminate Partition and Screens

# 1080 SERIES

### SPECIFICATION

**Height:** 58" (1473mm) Doors and Panels with 12"(305mm) Floor Clearance

### MATERIAL

**Stiles\*** — 3/4" (19mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Stiles:

- For compartments — 3", 4", 5", 6", 7", 8", 10", 12", 16", 18", 20", or 24" (76, 102, 127, 152, 179, 203, 254, 305, 406, 457, 508, 610mm) wide.
- For screens — 6" (152mm) wide.
- Floor-anchored — 69" (1753mm) high.
- Overhead-braced — 83" (2108mm) high.
- Floor-to-ceiling anchored — Up to 120" (3048mm) ceiling height.
- Ceiling-hung — 83" (2108mm) high for 96" (2438mm) ceilings or as required up to 120" (3048mm) ceilings.

**Panels** — 1/2" (13mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Panels:

- For compartments — Up to 84" (2134mm) wide; 58"(1473mm) high.

**Urinal Screens** — 1/2" (13mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Urinal Screens:

- For wall-hung screens — Up to 24" (610mm) wide; 42" to 54" (1067 to 1372mm) high.
- For ceiling-hung, floor anchored and post-to-ceiling screens — Up to 60" (1524mm) wide; 58" (1473mm) high.

**Doors** — 3/4" (19mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Doors:

- Inswing and outswing doors are standard 22" to 37" (559 to 940mm) wide; 58" (1473mm) high.

**Posts (for 1083 Series screens only)** — 1 1/4" (32mm) square tubing; 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish. Floor and ceiling connections are constructed of 18-8, Type-304, heavy-gauge stainless steel. Furnished in 120" (3048mm) lengths; to be cut in field to job specifications.

#### Standard Size Post:

- For 1083 Series post-to-ceiling screens only. 1 1/4" (32mm) square. 120" (3048mm); cut to required height in field.


**Headrail (for 1082 Series compartments only)** — Extruded anodized aluminum. Enclosed construction with sloping top. Face has raised grip-resistant edge.

#### Designer's Notes:

- Headrails with integral curtain tracks and hooks are available for compartments without doors. Optional vinyl curtains are available.

**Wall Posts** — 1" by 1 1/2" (25 by 38mm) wide tubing; 18-8, Type-304, 16-gauge (1.6mm) stainless steel with satin-finish. 58" (1473mm) high, pre-drilled for door hardware.

### TOP VIEW OF 1082 (BARREL HINGE AND STANDARD BRACKET) INSTALLATION.

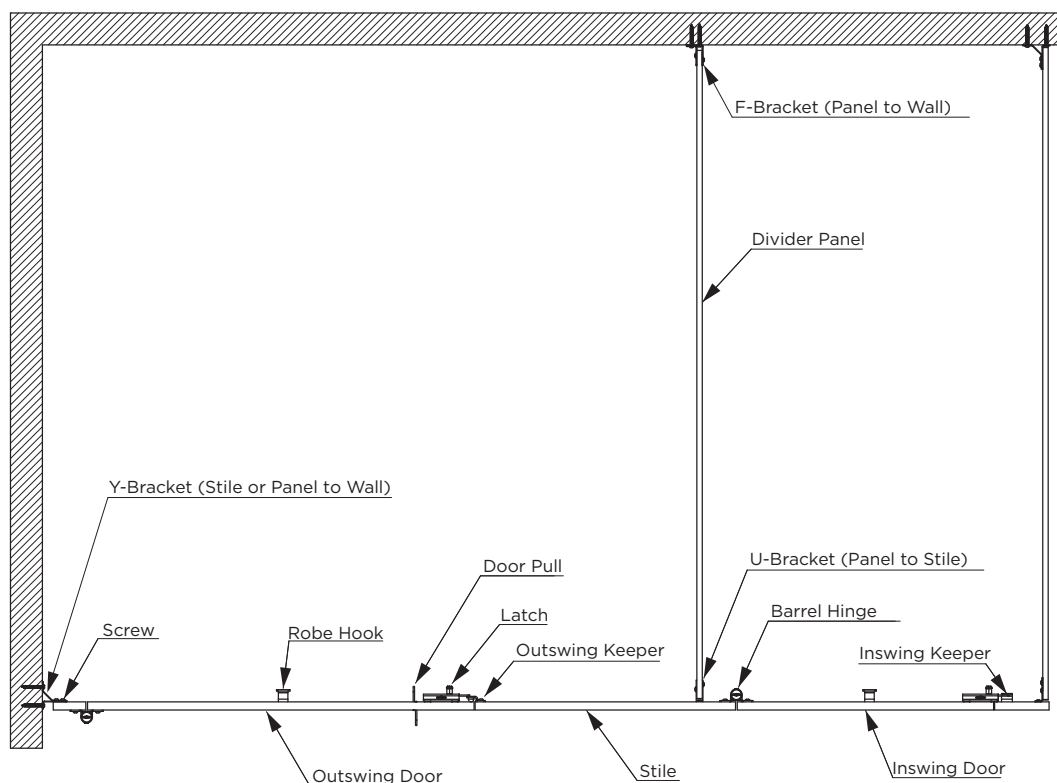


## ANCHORING DEVICE:

**Leveling Device** — 3/16" (5mm) thick, corrosion-resistant, chromate-treated, double zinc-plated steel angle leveling bar bolted to stile; furnished with 3/8" (10mm) diameter threaded rods, hex nuts, lock washers, flat washers, spacer sleeves, expansion anchors, and shoe retainers.

**Shoe** — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish; 4" (102mm) high. \*Stiles for 1086 Series floor-to-ceiling anchored have a leveling device at each end.

## #1002701 FLOOR ANCHOR

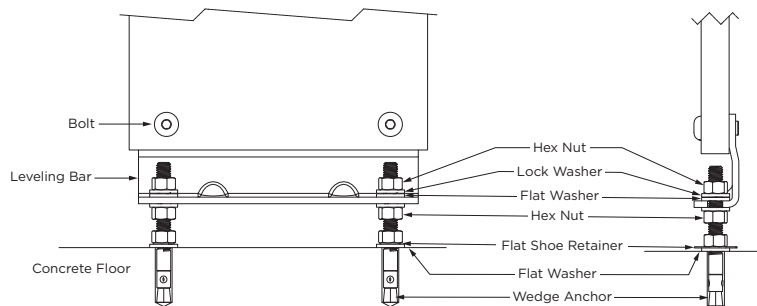

## COMMERCIAL HARDWARE (STANDARD)


Hinges, door latch, door keepers, clothes hooks, mounting brackets and door handles are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish.

Threaded inserts are factory installed for securing hinges and door latch. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware and all mounting brackets.


Balanced hinge is adjustable to hold door of unoccupied toilet compartment partially open or fully closed.

Toilet compartment door is locked from inside by sliding door latch into keeper. A locked compartment may be opened from outside by lifting door to disengage latch from keeper. Track of door latch prevents inswing door from swinging out beyond stile; on outswing door, the door keeper prevents it from swinging in beyond stile. Door handles and latch have operable parts that are operable with one hand and do not require tight grasping, pinching, or twisting of the wrist; and comply with ADA Sections 404.2.7 and 309.4. The force required to activate the operable parts shall be 5 pounds (22.2N) maximum. Black rubber bumper on the latch serves as door bumper for inswing door.


## #1040-42 LATCH ASSEMBLY

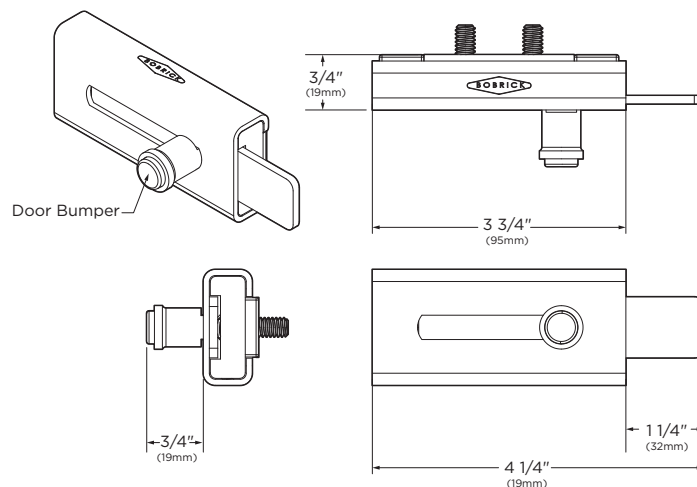


### 1040-35 KEEPER, INSWING

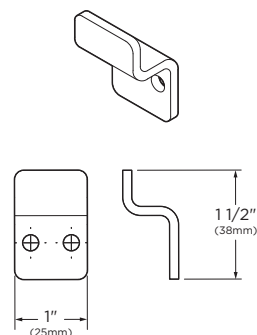


### 1040-36 KEEPER, OUTSWING

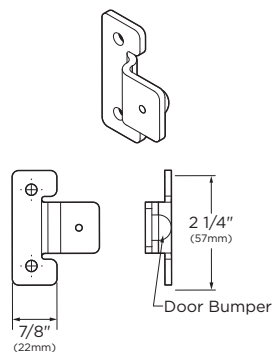







### 1040-39 PERPENDICULAR

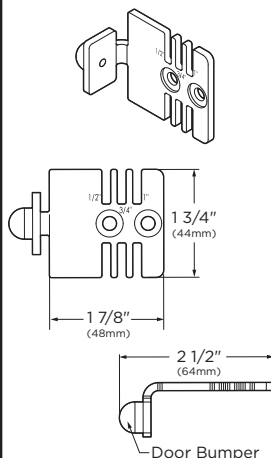


### #1040-56 WALL MOUNTED KEEPER INSWING

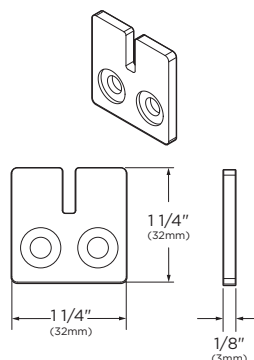




### #1000869 COAT HOOK

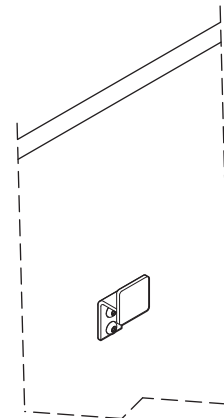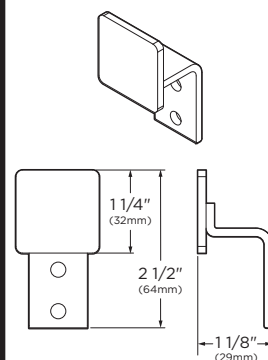

**#1002330  
BARREL HINGE SET, L**

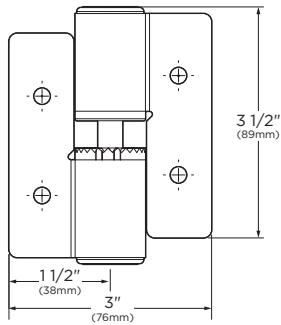

**#1002331  
BARREL HINGE SET, J**





**#1002156  
Hinge Cam**



Hinges are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish. Threaded inserts are factory installed for securing hinges. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware. Balanced hinge is adjustable to hold door of unoccupied toilet compartment partially open or fully closed.


**CAM SETTINGS**

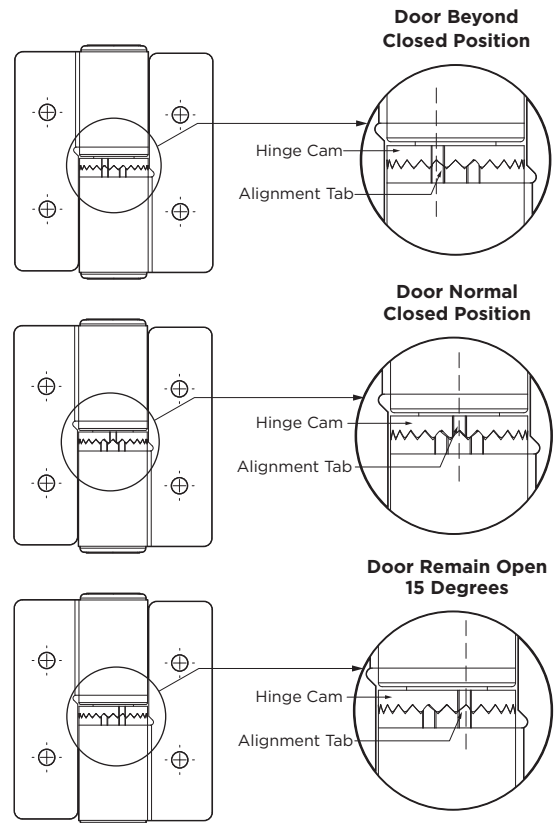


**#1002491  
1/4-20 x 1/2" (M6-1 x13mm)  
Pin-in-Head Torx Screw**

**BRACKETS (STANDARD):**


**#1000282  
Alcove Bracket  
(1/2" Panel to 3/4" Stile)**

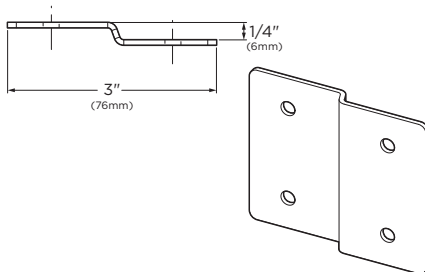


**#1000351  
L-Bracket  
(Panel to Corner Stile)**




**#1000972  
U-Bracket  
(Panel to Perp. Stile)**



**#1000974  
Y-Bracket  
(Stile to Wall)**

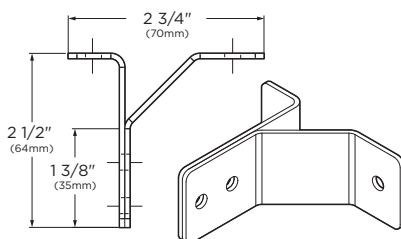


**#1000975  
F-Bracket  
(Panel to Wall)**

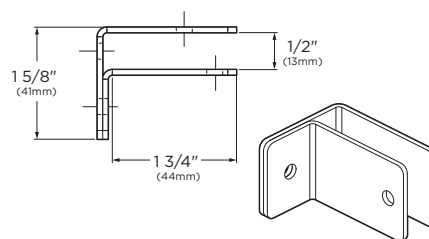


**#1002499  
#12 x 7/16" Pin-in-Head Torx Screw  
(M5.5 x 11mm)**




**#1002495  
#12 x 2" Pin-in-Head Torx Screw  
(M5.5 x 50mm) Wall Screw**



## 1081 SERIES FLOOR ANCHORED

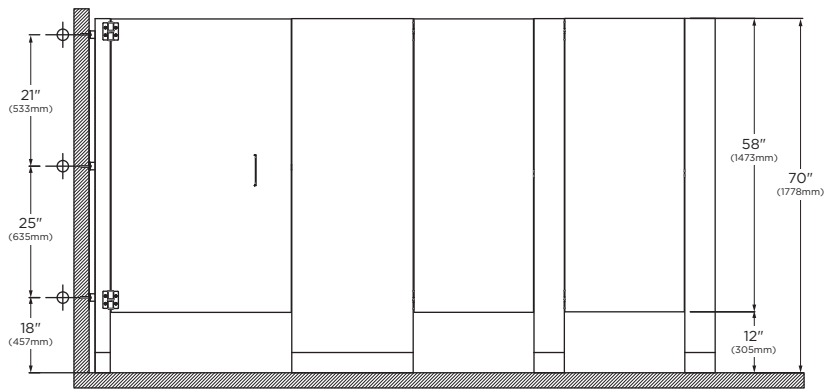

Front View

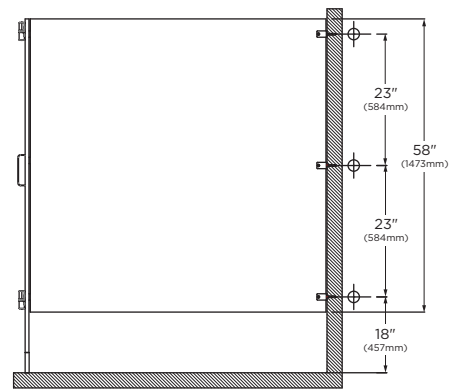

Side View

### STANDARD:

- ☐ #1081 - Barrel Hinge and Standard Bracket


### MODEL OPTIONS:

- ☐ #1081.67 - Continuous Hinge and Continuous Bracket
- ☐ #1081.67D - Continuous Hinge and Standard Bracket
- ☐ #1081.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1081.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1081.67P - Barrel Hinge and Continuous Bracket


### GAPLESS MODEL OPTIONS:

- ☐ #1081G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1081G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1081G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1081G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1081G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1081G.67P - Gapless, Barrel Hinge and Continuous Bracket

## 1082 SERIES OVERHEAD-BRACED

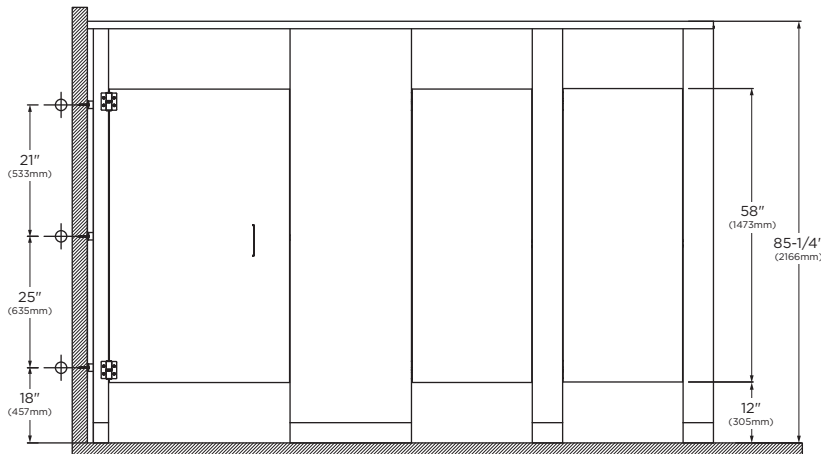

Front View

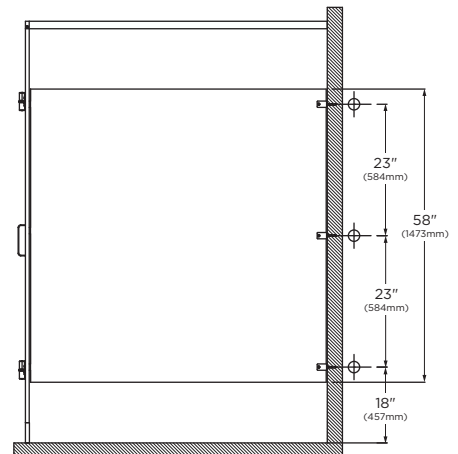

Side View

### STANDARD:

- ☐ #1082 - Barrel Hinge and Standard Bracket


### MODEL OPTIONS:

- ☐ #1082.67 - Continuous Hinge and Continuous Bracket
- ☐ #1082.67D - Continuous Hinge and Standard Bracket
- ☐ #1082.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1082.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1082.67P - Barrel Hinge and Continuous Bracket


### GAPLESS MODEL OPTIONS:

- ☐ #1082G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1082G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1082G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1082G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1082G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1082G.67P - Gapless, Barrel Hinge and Continuous Bracket


### Headrail Installation Detail

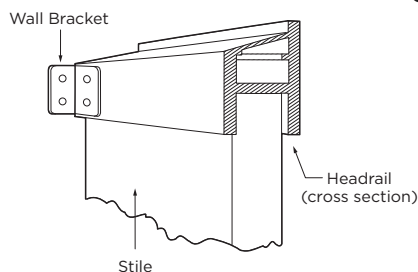


### Curtain Track Installation Detail



## 1086 SERIES FLOOR-TO-CEILING

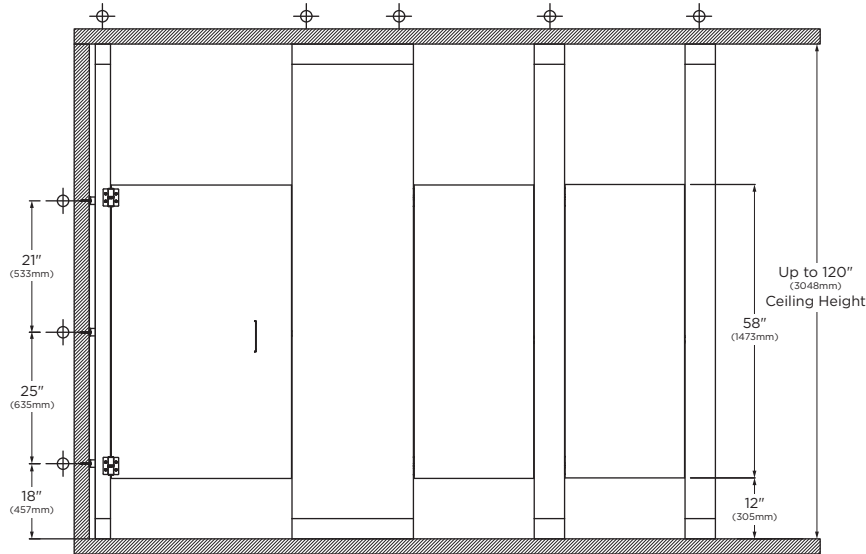

Front View

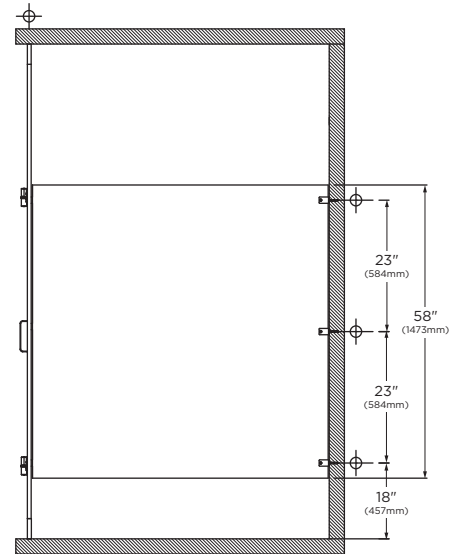

Side View

### STANDARD:

- ☐ #1086 - Barrel Hinge and Standard Bracket


### MODEL OPTIONS:

- ☐ #1086.67 - Continuous Hinge and Continuous Bracket
- ☐ #1086.67D - Continuous Hinge and Standard Bracket
- ☐ #1086.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1086.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1086.67P - Barrel Hinge and Continuous Bracket


### GAPLESS MODEL OPTIONS:

- ☐ #1086G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1086G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1086G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1086G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1086G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1086G.67P - Gapless, Barrel Hinge and Continuous Bracket

## 1088 SERIES CEILING HUNG

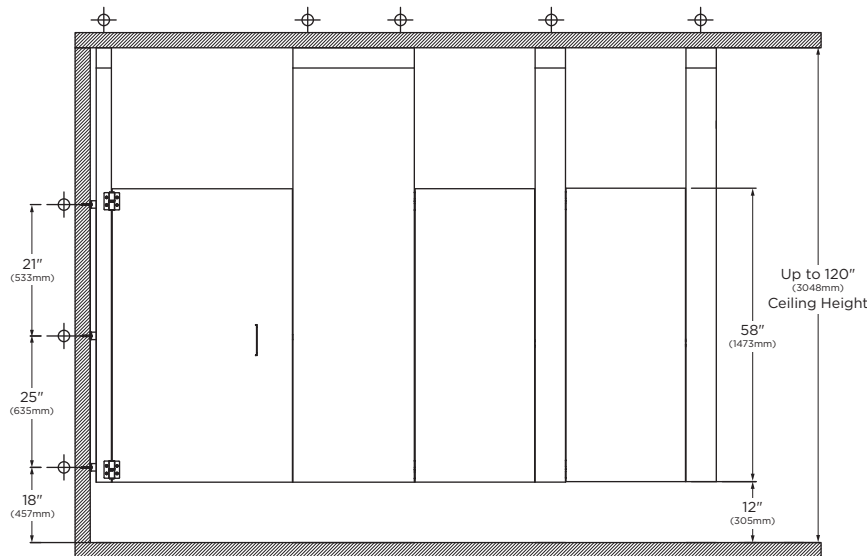

Front View

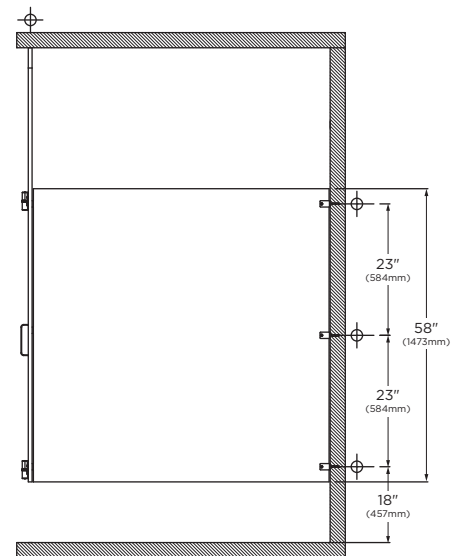

Side View

### STANDARD:


- ☐ #1088 - Barrel Hinge and Standard Bracket

### MODEL OPTIONS:

- ☐ #1088.67 - Continuous Hinge and Continuous Bracket
- ☐ #1088.67D - Continuous Hinge and Standard Bracket
- ☐ #1088.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1088.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1088.67P - Barrel Hinge and Continuous Bracket

### GAPLESS MODEL OPTIONS:

- ☐ #1088G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1088G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1088G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1088G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1088G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1088G.67P - Gapless, Barrel Hinge and Continuous Bracket

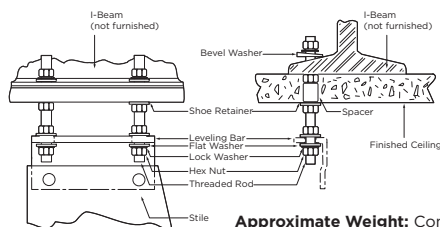

### Ceiling Leveling Device


Provisions must be in the construction of the building to support ceiling-hung toilet partitions. Structure in ceiling, not furnished by Bobrick, must support at least 275 lbs. per compact grade laminate toilet compartment, and must be sufficiently rigid to withstand swinging motion of toilet partition doors and impact of doors against stiles. Actual mounting system, including lateral bracing, if required, must be designed by the architect or structural engineer, and furnished by others. Wood beams are not recommended for ceiling hung application. **Note:** If adequate ceiling support cannot be provided, the floor-anchored or overhead-braced toilet compartments are recommended.

**Approximate Weight:** Compact Grade Laminate Toilet Compartment - 275 lbs.


### CONTINUOUS .67 BRACKET (OPTION):

Mounting brackets are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height U-channels and angle brackets are 18 gauge (1.2mm). U-channels secure panels to stiles, and angle brackets secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for U-channels, Z-bracket and angle brackets.


**#1001371 Angle Bracket**

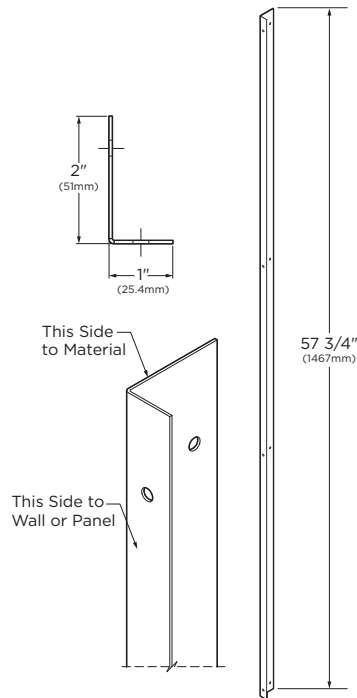

**#1001368 U-Channel**

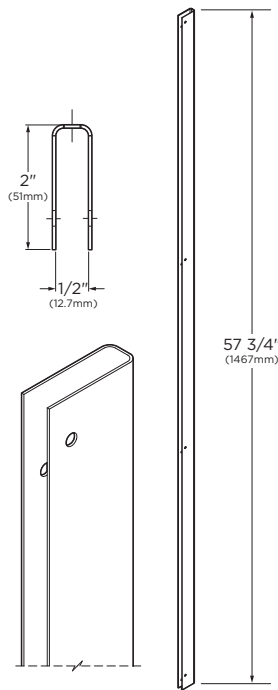



**#1080-76 Z-Bracket**

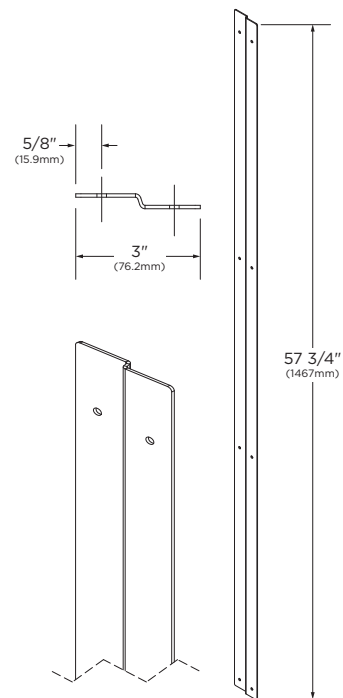




### CONTINUOUS .67 HINGES (OPTION):

Hinges are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish: one-piece, full-height hinge is 16 gauge (1.6mm); Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware. Doors are equipped with a gravity type self-closing hinge. Threaded inserts are factory installed to secure door hinge. **The continuous hinge (.67 option) depends on the weight of the door to return the hinge to its closed position, which may result in door slamming.**

**#1002920  
Left-Hand Inswing or  
Right-Hand Outswing**




**#1002921  
Right-Hand Inswing  
or Left-Hand Outswing**

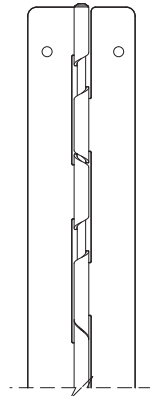

### HINGE CAM MAINTENANCE:


Cleaning and lubricating hinge is required to avoid failure of hinge mechanism. Must use a Teflon type based lubricant such as Tri-Flow Superior Lubricant with P.T.F.E. It is not recommended to use machine oil or WD-40 which will collect dust and dirt.



**#1002491  
1/4-20 x 1/2" (M6-1 x 13mm)  
Pin-in-Head Torx Screw**




## □ OCCUPANCY INDICATOR LATCH (OPTION):

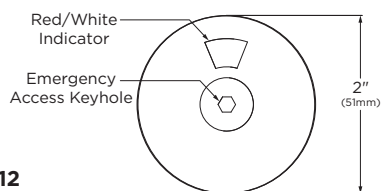


### #1002612 OccupancyIndicator Latch Packet



**Emergency Access** - The latch allows the door to be opened from the exterior of the toilet compartment by inserting a 3mm Allen key into the keyhole in the center of the cover plate and turning the key to release the latch.

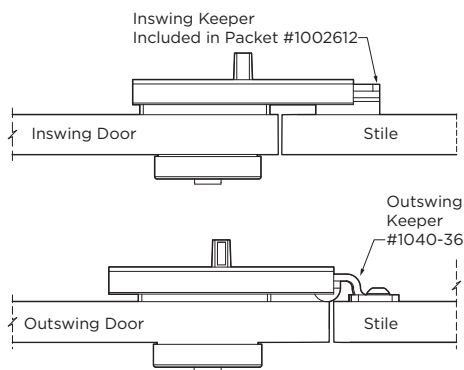



## DOOR STOP (OPTION):




### #1040-110 Door Stop Packet

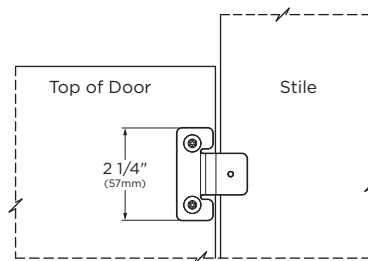


## GAP FREE DOORS & STILES (OPTION):

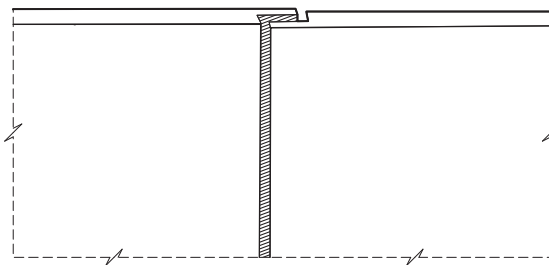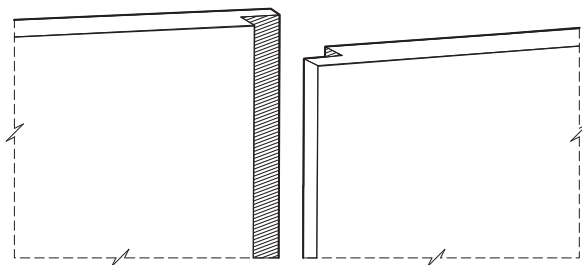

**Features: Interlocking, sightline-free design (Gapless).**

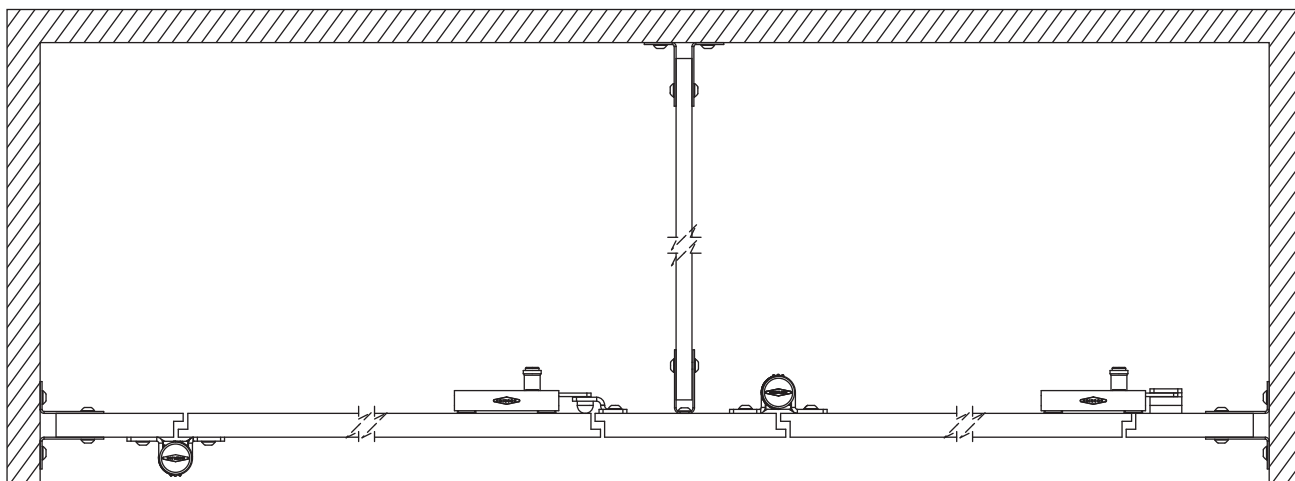

## 1080 URINAL SCREENS:

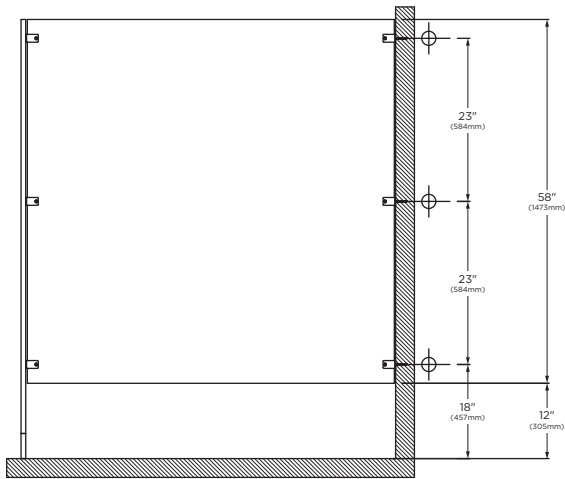


**FLOOR ANCHORED URINAL SCREEN**

### STANDARD:

- ☐ #1081 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1081.67 - Continuous Bracket

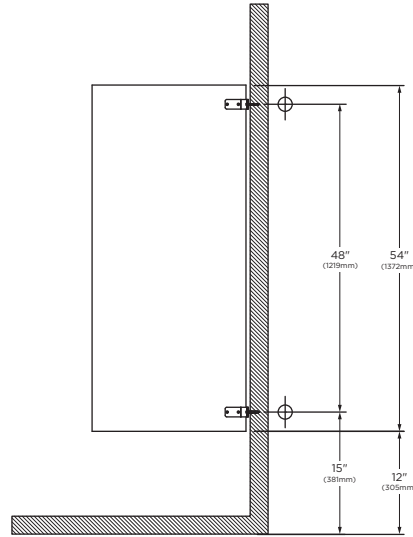

**WALL MOUNTED URINAL SCREEN**

Up to 54" (1372mm) high.




### STANDARD:

- ☐ #1085 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1085.67 - Continuous Bracket


## #1002956 W/H Urinal Screen Bracket



## #1002966 #10-32 x 1-1/4" (38mm) Pin-in-Head Torx Screw



## #1000133 Acorn Nut #10-32 Through-Bolt Urinal Screen

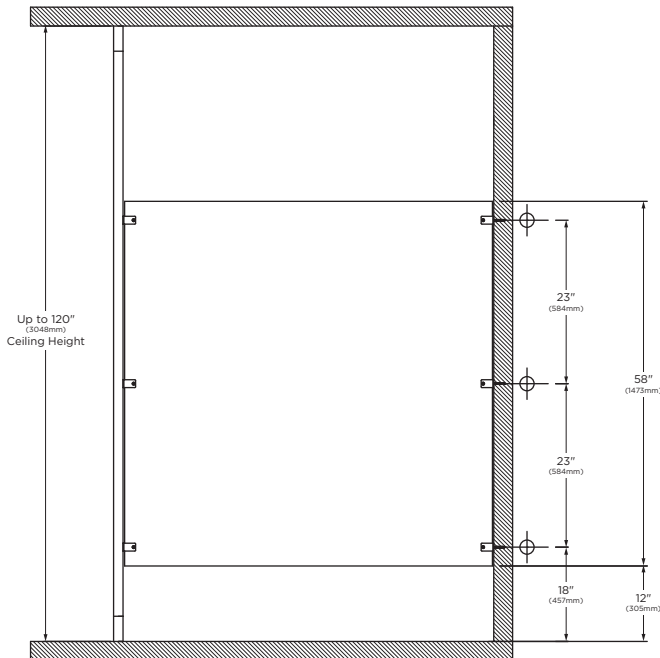


**POST-TO-CEILING URINAL SCREEN**

### STANDARD:

- ☐ #1083 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1083.67 - Continuous Bracket

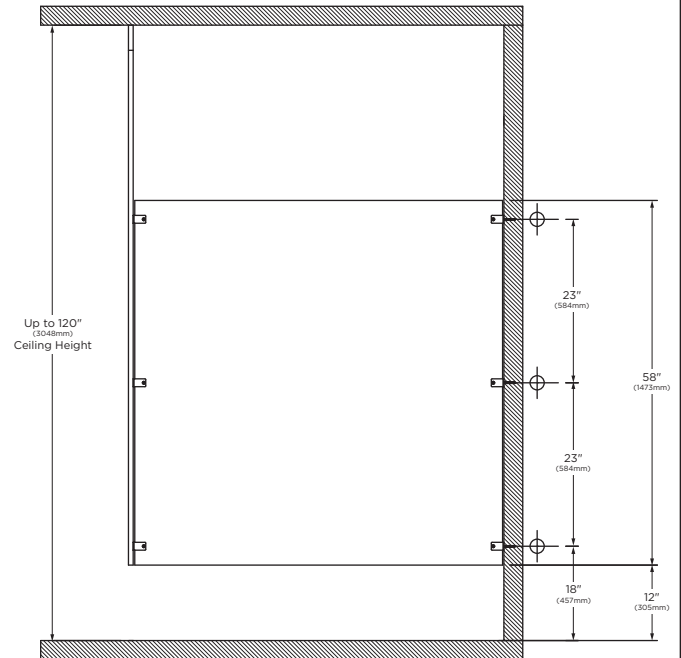

**CEILING-HUNG URINAL SCREEN**

### STANDARD:

- ☐ #1088 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1088.67 - Continuous Bracket

## INSTALLATION:

Refer to Bobrick installation instructions packed with each shipment. Also available on [bobrick.com](http://bobrick.com). Form No. 1080-69.

## NOTES:

1. Ceiling-hung and floor-to-ceiling toilet compartments require structural members (not furnished by Bobrick) in ceiling. For suggested types of ceiling support systems, see Bobrick Advisory Bulletin TB-32.
2. Wall backing is required to secure the mounting brackets of panels, stiles, and wall posts. For suggested wall backing, see Bobrick Advisory Bulletin TB-46.
3. Floor-anchored stiles are furnished with expansion shields and threaded rods. The expansion shields require minimum 2" (50mm) penetration into minimum 3" (75mm) thick structural concrete.
4. Bobrick stainless steel partition-mounted washroom accessories are available for mounting in panels between two compartments. See current Bobrick Catalog for description of accessories. Cutouts in panels can be pre-cut for Bobrick models at factory if location and size of all cutouts and Bobrick model numbers are furnished at time of order.
5. When the hinge cam has been set at the desired free resting position, "either closed or open" the top of the affixed components will be aligned.

## GUARANTEE:

Bobrick toilet partitions including all hardware and mounting brackets are guaranteed to be free from defects in material and workmanship for a period of one year from date of purchase. Any products returned to Bobrick under this guarantee will be repaired or replaced at no charge. **25-Year Warranty:** Bobrick extends a twenty-five-year limited warranty from date of purchase for DuraLineSeries Compact Grade Laminate partition panels, doors, and stiles against breakage, corrosion, delamination, and defects in factory workmanship when materials are properly installed, then used and serviced normally.

## SPECIFICATION:

Compact Grade Laminate (Solid Phenolic) \_\_\_\_\_ (insert one: toilet partitions, dressing compartments, shower dividers, urinal screens, entrance screens) shall be \_\_\_\_\_ (insert one: floor-anchored, overhead-braced, floor-to-ceiling anchored, ceiling-hung, wall-hung, post-to-ceiling). Stiles, panels and doors shall be constructed of solidly fused Compact Grade Laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded; and covered by a 25-year limited warranty against breakage, corrosion, and delamination. Stiles and doors shall be 3/4" (19mm) thick; panels shall be 1/2" (13mm) thick. All units shall meet ICC, NFPA Class B, ASTM E-84 Interior Wall and Ceiling Finish Classification. Stiles shall have leveling device that is concealed by a one-piece, type-304, satin-finish stainless steel shoe that is 4" (102mm) high. Stiles, panels and doors shall be \_\_\_\_\_ (insert color name and number from current Bobrick Catalog). Headrails for overhead-braced compartments shall be anodized aluminum with satin finish. \*\*All door hardware and mounting brackets shall be Type-304 stainless steel. No door hardware or mounting brackets shall be exposed on exterior of compartments, except on outswing doors. All doors shall be supplied with two hinges. Threaded inserts shall be factory installed for securing hinges and door latch. Theft-resistant, stainless steel pin-in-head, torx screws shall be furnished for door hardware and all mounting brackets. A clothes hook shall be furnished for each door. Hinges shall be adjustable to hold doors of unoccupied compartments partially open or fully closed, and shall allow a locked compartment to be opened from outside by lifting door to disengage latch from keeper.

\*To specify Gapless door and stile option, add suffix "G" to series number. Example: specify 1082G.

\*\*To specify Continuous hardware, replace end of specification paragraph with: .67 option. All door hardware, U-channels, and angle brackets shall be Type-304 stainless steel with satin finish: one-piece, full-height hinges shall be 16 gauge (1.6mm); one-piece, full-height U-channels and angle brackets shall be 18 gauge (1.2mm). U-channel shall be furnished to secure panels to stiles, and angle brackets furnished to secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, torx screws shall be furnished for door hardware, U-channels, and angle brackets. A clothes hook shall be furnished for each door. Hinges shall allow locked compartment to be opened in emergency from outside by lifting door to disengage latch from keeper. Doors shall be equipped with a self-closing hinge. Threaded inserts shall be factory installed to secure all door hinges and latch.


\*\*\*Addendum: Units fabricated with FunderMax or Abet Laminati Compact Grade Laminate will meet ICC, NFPA Class A, ASTM E-84 Interior Wall and Ceiling Finish Classification.

\_\_\_\_\_ (insert one: Toilet Partitions, Dressing Compartments, Shower Dividers, Urinal Screens, Entrance Screens) shall be \_\_\_\_\_ Series (insert series number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.

HEIGHT		COLOR SELECTION	DISTRIBUTOR	35205 - FRY SPECIALTY INC	Note: Dimensions are in inches	
PANEL	58	4830-60-Satin Stainless	QUOTE#/S.O.#	9061828-1		
STILE	69	4830-60-Satin Stainless	P.O.#			
DOOR	58	4830-60-Satin Stainless	DATE	4/23/2024		
			JOB NAME	17029646		
			ROOM	Womens		

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

## FLOOR CLEARANCE 12

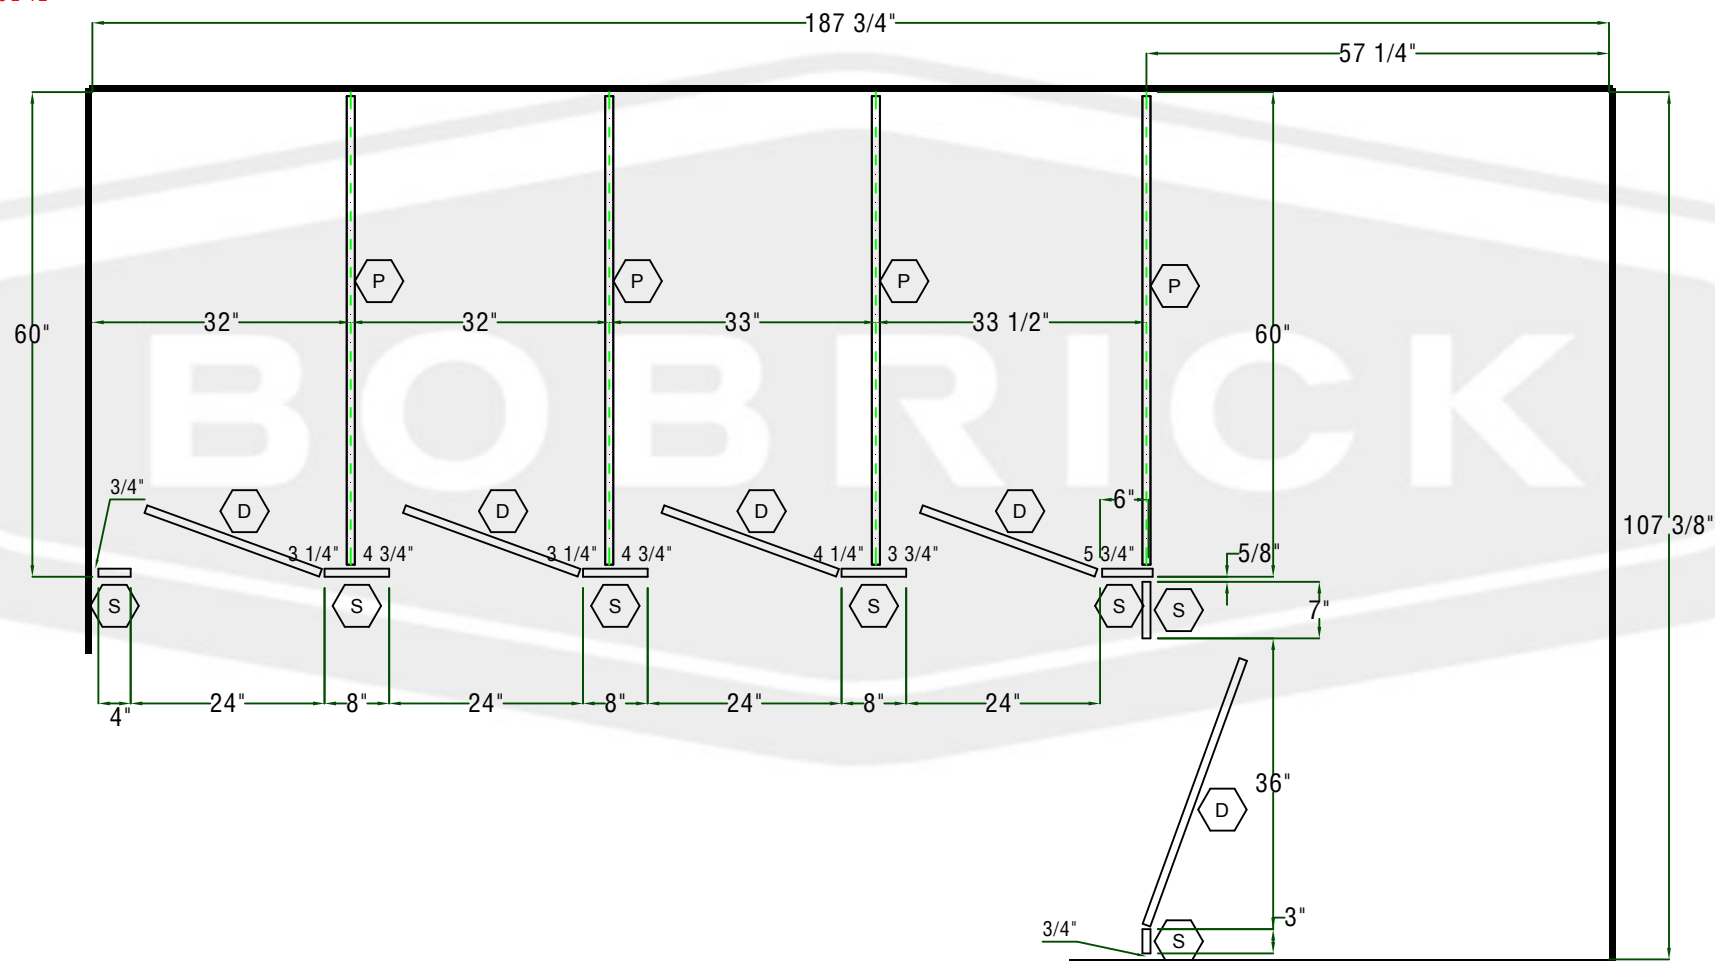

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL  
PLUS 1/4" PANEL TO STILE  
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

S STILE
 W WALLPOST
 D DOOR
 P PANEL
 H HEADRAIL
 B BENCH


EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED \_\_\_\_\_

HEIGHT	COLOR SELECTION	DISTRIBUTOR	45205 - FRY SPECIALTY INC	Note: Dimensions are in inches
PANEL 58	4830-60-Satin Stainless	QUOTE#/S.O.#	9061828-1	
STILE 69	4830-60-Satin Stainless	P.O.#		
DOOR 58	4830-60-Satin Stainless	DATE	4/23/2024	
		JOB NAME	17029646	
		ROOM	Mens	

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

## FLOOR CLEARANCE 12

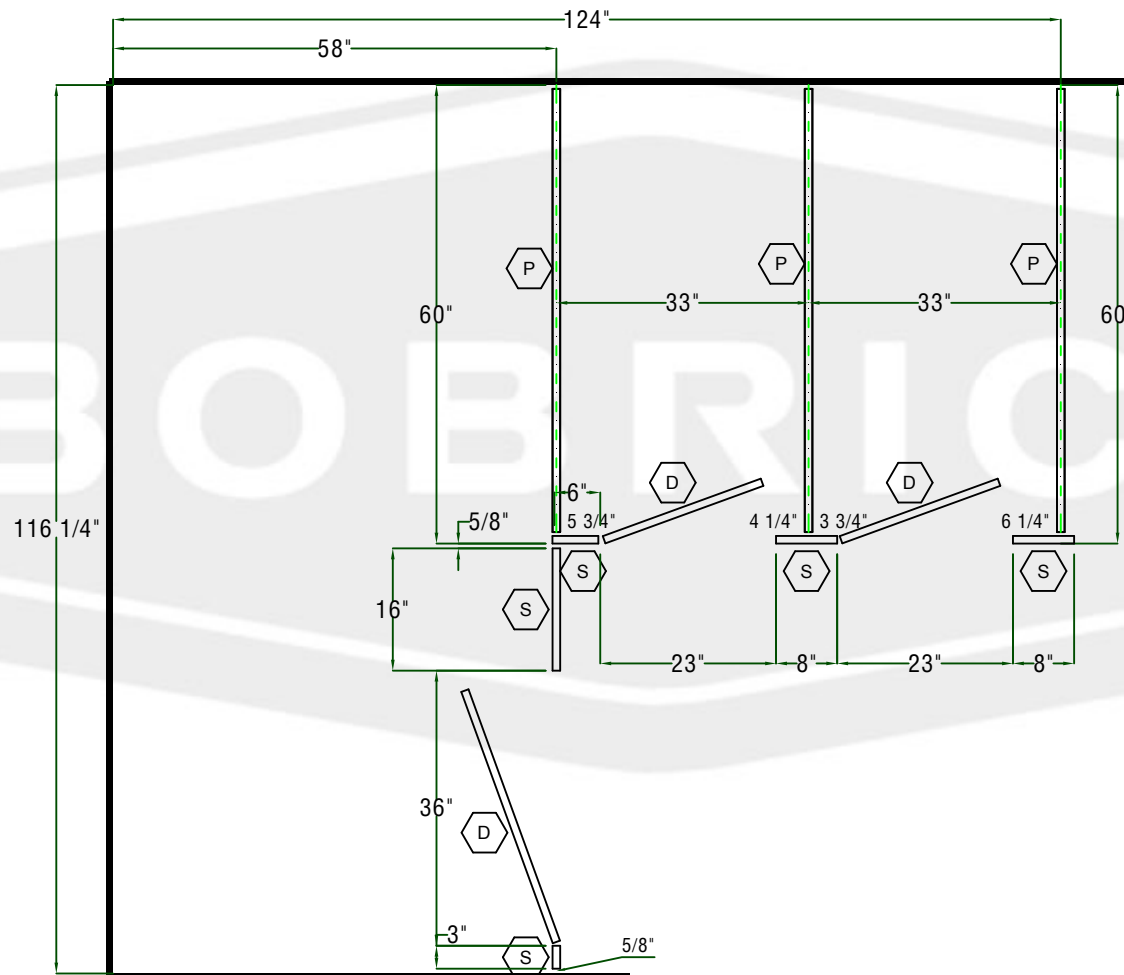

MAKE 1 UNITS THUS

1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL  
PLUS 1/4" PANEL TO STILE  
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

(S) STILE (W) WALLPOST (D) DOOR (P) PANEL (H) HEADRAIL (B) BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED \_\_\_\_\_



DURALINE

Series: 1085

Type: Screen Wall Hung

Layout: Urinal Screen

3 Of 3

COLOR SELECTION

4830-60-Satin Stainless  
4830-60-Satin Stainless  
4830-60-Satin Stainless


DISTRIBUTOR 35205 - FRY SPECIALTY INC  
QUOTE#/S.O.# 9061828-1  
P.O.#  
DATE 4/23/2024

JOB NAME 17029646  
ROOM Mens

Note: Dimensions are in inches

Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.

FLOOR CLEARANCE 12

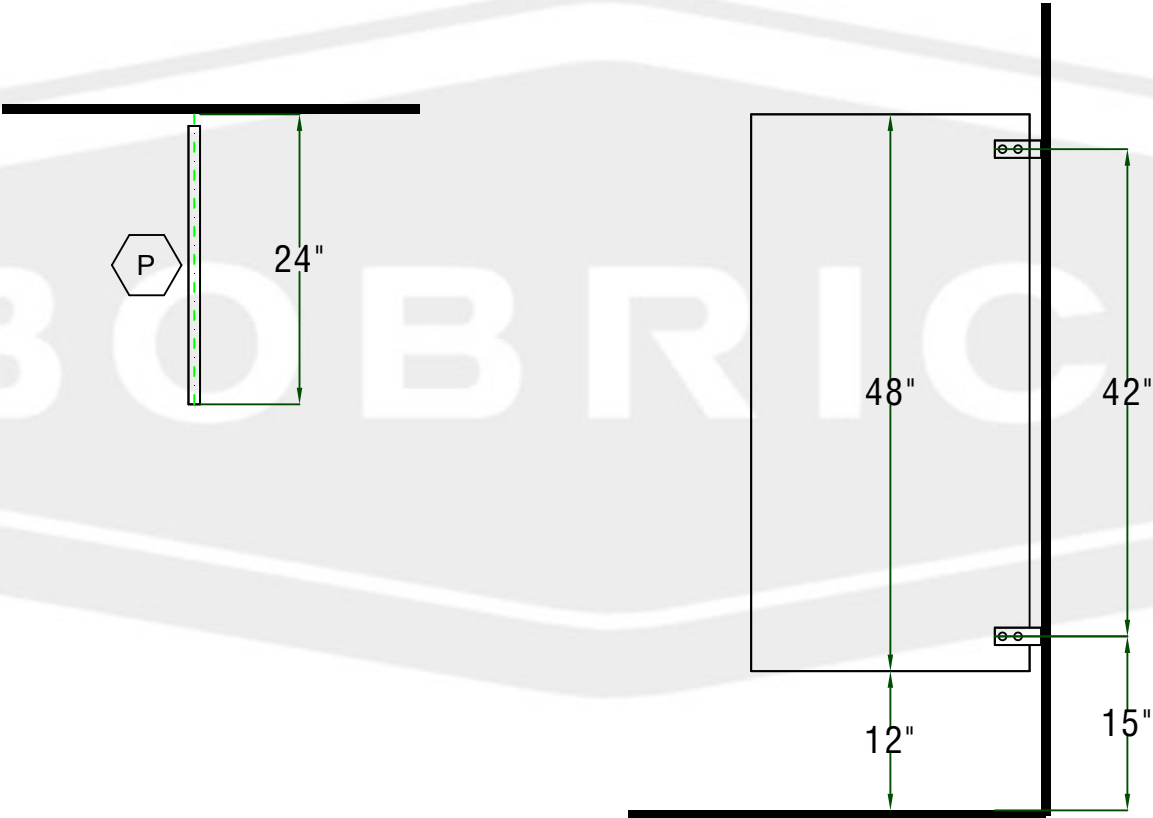

PLAN VIEW

SIDE VIEW

MAKE 4 UNITS THUS

1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL  
PLUS 1/4" PANEL TO STILE  
NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED

STILE WALLPOST DOOR PANEL HEADRAIL BENCH

EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.

APPROVED \_\_\_\_\_



BUILDING VALUE SINCE 1906



## COMPACT GRADE LAMINATE (CGL) STANDARD COLORS & PATTERNS


### Single Piece Panels Available Up To 5'




Satin Stainless with  
Dove Grey Core  
4830-SC-60SC\*



Satin Stainless with  
Black Core  
4830-60



White  
949-58



Grey Grit  
P-886-CA




Pewter Mesh  
4878-60




Earth  
5342-58



Evening Tigris  
4674-60




Citadel Warp  
5882-58



Navy Grafix  
7018-58



Graphite Grafix  
515-58




Black Stone  
P-500-CA



Black  
1595-60

\*Wilsonart® SOLICOR™ is a specialty laminate with a solid color core to match the surface. Color upcharge premium applies.

### Single Piece Panels Available Up To 6'\*\*\*



Ice White  
410-SEI




Sand  
414-SEI



Light Grey  
478-SEI



Pearl Grey  
475-SEI




Brushed Aluminum  
0328-FH



Charcoal  
0077-FH




Silvretta  
0229-FH



Cello  
0811-FH

### Additional Colors: Solid Color CGL - Wilsonart® Solicor™ Colors & Patterns\*



Designer White  
D354-SC-60SC (White Core)


Note: Non-stock; made to order, lead times and color upcharge premiums apply. Samples can be requested from the manufacturer.



Dove Grey  
D92-SC-60SC



Khaki Brown  
D50-SC-60SC



Natural Almond  
D30-SC-60SC



Silver Oak Ply  
8203-SC-60SC



Silver Alchemy  
4860-SC-60SC



High Line  
7970-SC-60SC



Park Elm  
7967-SC-60SC



Field Elm  
7999-SC-60SC



Flax Linen  
4990-SC-60SC



Pressed Linen  
4991-SC-60SC



Pearl Soapstone  
4886-SC-60SC



Phantom Ecru  
8212-SC-60SC



Tan Soapstone  
4887-SC-60SC



Calacatta Oro  
4981-SC-60SC

\*Wilsonart® SOLICOR™ is a specialty laminate with a solid color core to match the surface. Color upcharge premium applies.

\*\*Standard color by ABET LAMINATI and FUNDERMAX® allows for single panel width up to 72", eliminating use of additional hardware. Meets Class A fire rating without upcharge.

Hundreds of additional CGL colors are available from our partners; additional lead time will apply. Please consult with ABET LAMINATI®, ARBORITE®, FORMICA®, Wilsonart® or FUNDERMAX for color options. Non-stock Abet Laminati or FUNDERMAX colors carry a significant lead time of 10-14 weeks.

ABET LAMINATI is a trademark of ABET Inc. and ABET LAMINATI S.p.A. ARBORITE and Wilsonart are registered trademarks of Wilsonart Engineered Surfaces and Wilsonart International, Inc. SOLICOR is a trademark of Wilsonart Engineered Surfaces and Wilsonart International, Inc. FORMICA and the FORMICA Anvil logo are registered trademarks of The Diller Corporation. © 2015 The Diller Corporation. FUNDERMAX is a registered trademark of FUNDERMAX GmbH.

