

# Washroom Equipment Job Summary



BUILDING VALUE SINCE 1906

Quote No: 9058872-1  
Quote Date: 4/18/2024  
Distributor: FRY SPECIALTY INC  
PO No:  
Architect:  
Last Revised: 4/18/2024

Customer:  
Contact:  
Job Name: PERACHA PARTS  
Building Type: Stock  
Prepared By: christinaziccardi  
Last Revised By: christinaziccardi

Item	Description	Qty	Weight	Cube	Quote (\$)	Quote Ext (\$)
1085	N/A	1	25.73	0.24		
1082	1082 SERIES TC PER LAYOUT	1	11.42	0.11		
Total No. of Stalls 0, Screens 1			37.15	.35	<b>Merch. Total:</b>	<b>438.55</b>
					Freight Estimate:	129.29
					<b>Grand Total:</b>	<b>567.84</b>

Quantities and descriptions are not guaranteed to agree with plans and specifications. Please compare them with actual requirements to avoid errors, Sales or Use Tax of any kind is not included in any price shown above.

Models quoted using crossover guide are similar in function. Bobrick does not guarantee descriptions to agree with plans and specifications. Please compare with actual requirements to avoid error.

Partition volume discount pricing is based on each qualifying color on a single shipment.

The Quote is subject to your acceptance within (30) days. Prices are based on current costs of labor and material, and are firm for orders authorizing immediate shipment. If future shipment is requested, prices will be subject to escalation to cover costs at the time of requested shipment.

At the time of shipment of this order, if your firm warrants open credit by Bobrick, the Terms of Sale would be Net 30 Days from Date of Invoice.

Freight costs are estimates only. Actual Freight is subject to change.

**Shipping Information (PLEASE MARK ALL THAT APPLY):**

- 
- ☐ Ship ASAP
  - ☐ Do NOT Ship Before Date \_\_\_\_/\_\_\_\_/\_\_\_\_
  - ☐ Lift Gate Fee Add. \$125.00  
**(REQUIRED IF NO FORKLIFT OR LOADING DOCK)**
  - ☐ Residential / Non-Commercial Delivery Add. \$95.00\*
  - ☐ Notification call prior to delivery Add \$40.00

**APPROVED:** \_\_\_\_\_

**\* The term "residential/non-commercial" also includes apartments, places of worship, schools, pre-schools, day cares, camps, farms, public storage facilities, business operating within a private residence, and other such locations not generally recognized as commercial locations and shall apply to the entire premises.**



## Technical Data

# DuraLineSeries®

## Compact Grade Laminate Partition and Screens

# 1080 SERIES

### SPECIFICATION

**Height:** 58" (1473mm) Doors and Panels with 12"(305mm) Floor Clearance

### MATERIAL

**Stiles\*** — 3/4" (19mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Stiles:

- For compartments — 3", 4", 5", 6", 7", 8", 10", 12", 16", 18", 20", or 24" (76, 102, 127, 152, 179, 203, 254, 305, 406, 457, 508, 610mm) wide.
- For screens — 6" (152mm) wide.
- Floor-anchored — 69" (1753mm) high.
- Overhead-braced — 83" (2108mm) high.
- Floor-to-ceiling anchored — Up to 120" (3048mm) ceiling height.
- Ceiling-hung — 83" (2108mm) high for 96" (2438mm) ceilings or as required up to 120" (3048mm) ceilings.

**Panels** — 1/2" (13mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Panels:

- For compartments — Up to 84" (2134mm) wide; 58"(1473mm) high.

**Urinal Screens** — 1/2" (13mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Urinal Screens:

- For wall-hung screens — Up to 24" (610mm) wide; 42" to 54" (1067 to 1372mm) high.
- For ceiling-hung, floor anchored and post-to-ceiling screens — Up to 60" (1524mm) wide; 58" (1473mm) high.

**Doors** — 3/4" (19mm) thick, solidly fused compact grade laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded. Edges are black.

#### Standard Size Doors:

- Inswing and outswing doors are standard 22" to 37" (559 to 940mm) wide; 58" (1473mm) high.

**Posts (for 1083 Series screens only)** — 1 1/4" (32mm) square tubing; 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish. Floor and ceiling connections are constructed of 18-8, Type-304, heavy-gauge stainless steel. Furnished in 120" (3048mm) lengths; to be cut in field to job specifications.

#### Standard Size Post:

- For 1083 Series post-to-ceiling screens only. 1 1/4" (32mm) square. 120" (3048mm); cut to required height in field.


**Headrail (for 1082 Series compartments only)** — Extruded anodized aluminum. Enclosed construction with sloping top. Face has raised grip-resistant edge.

#### Designer's Notes:

- Headrails with integral curtain tracks and hooks are available for compartments without doors. Optional vinyl curtains are available.

**Wall Posts** — 1" by 1 1/2" (25 by 38mm) wide tubing; 18-8, Type-304, 16-gauge (1.6mm) stainless steel with satin-finish. 58" (1473mm) high, pre-drilled for door hardware.

### TOP VIEW OF 1082 (BARREL HINGE AND STANDARD BRACKET) INSTALLATION.

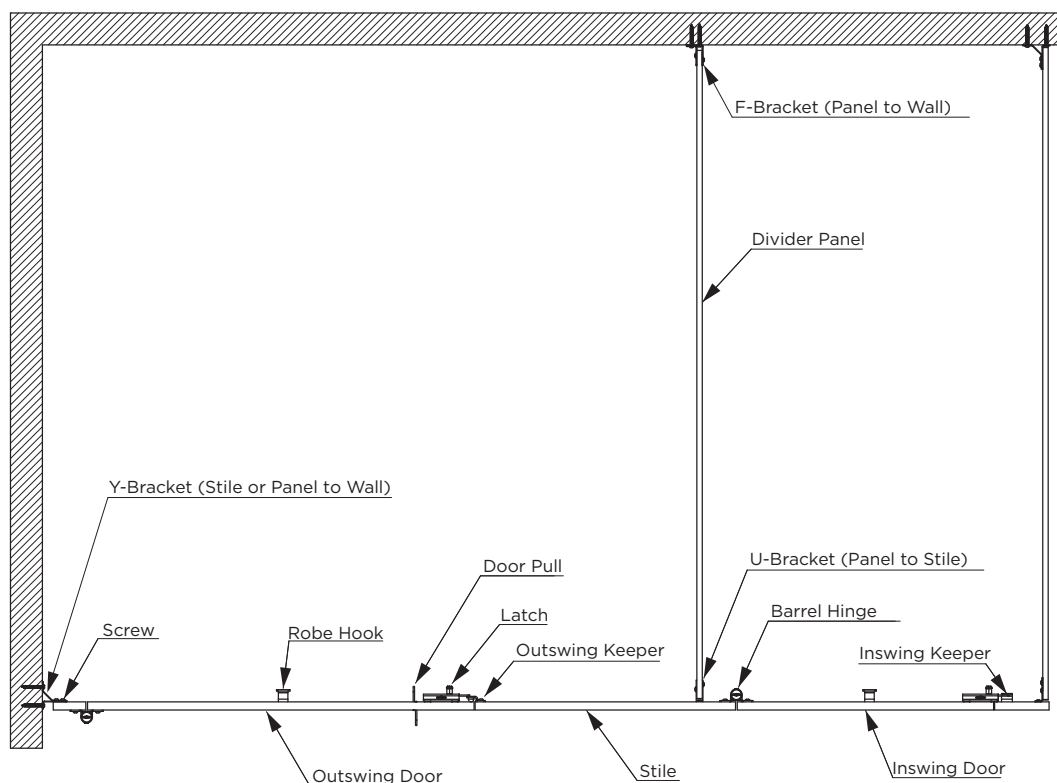


## ANCHORING DEVICE:

**Leveling Device** — 3/16" (5mm) thick, corrosion-resistant, chromate-treated, double zinc-plated steel angle leveling bar bolted to stile; furnished with 3/8" (10mm) diameter threaded rods, hex nuts, lock washers, flat washers, spacer sleeves, expansion anchors, and shoe retainers.

**Shoe** — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish; 4" (102mm) high. \*Stiles for 1086 Series floor-to-ceiling anchored have a leveling device at each end.

## #1002701 FLOOR ANCHOR

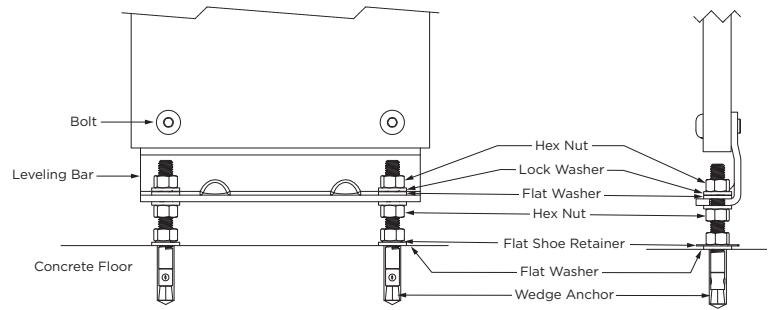

## COMMERCIAL HARDWARE (STANDARD)


Hinges, door latch, door keepers, clothes hooks, mounting brackets and door handles are constructed of 18-8, Type-304, heavy-gauge stainless steel with satin finish.

Threaded inserts are factory installed for securing hinges and door latch. Theft-resistant, stainless steel pin-in-head, torx screws are furnished for door hardware and all mounting brackets.



Balanced hinge is adjustable to hold door of unoccupied toilet compartment partially open or fully closed.

Toilet compartment door is locked from inside by sliding door latch into keeper. A locked compartment may be opened from outside by lifting door to disengage latch from keeper. Track of door latch prevents inswing door from swinging out beyond stile; on outswing door, the door keeper prevents it from swinging in beyond stile. Door handles and latch have operable parts that are operable with one hand and do not require tight grasping, pinching, or twisting of the wrist; and comply with ADA Sections 404.2.7 and 309.4. The force required to activate the operable parts shall be 5 pounds (22.2N) maximum. Black rubber bumper on the latch serves as door bumper for inswing door.



## #1040-42 LATCH ASSEMBLY

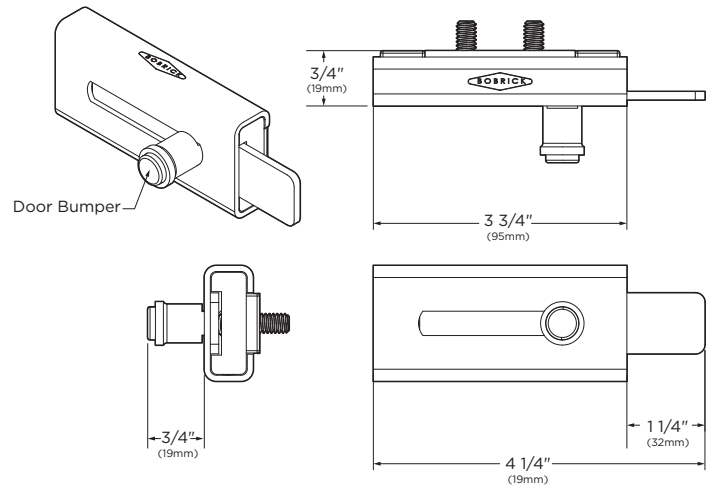



### 1040-35 KEEPER, INSWING





### 1040-36 KEEPER, OUTSWING

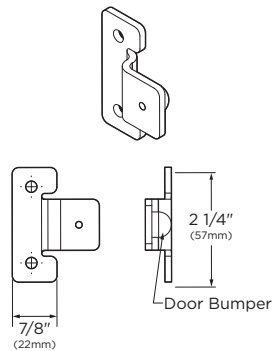



### 1040-39 PERPENDICULAR

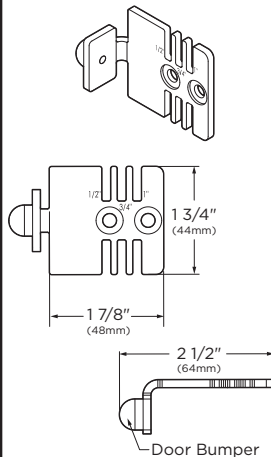


### #1040-56 WALL MOUNTED KEEPER INSWING

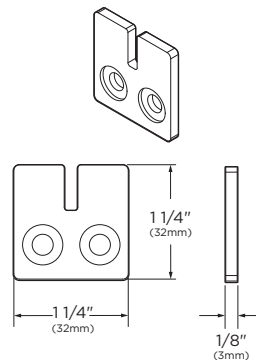


### #1000869 COAT HOOK

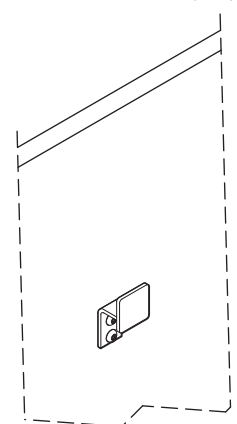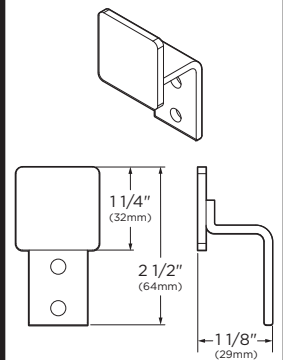

## 1081 SERIES FLOOR ANCHORED

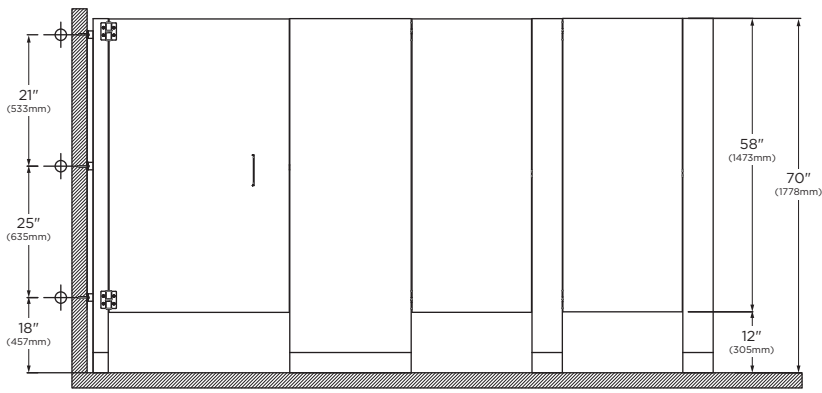

Front View

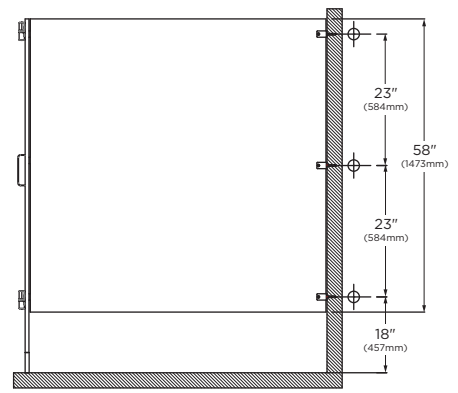

Side View

### STANDARD:

- ☐ #1081 - Barrel Hinge and Standard Bracket


### MODEL OPTIONS:

- ☐ #1081.67 - Continuous Hinge and Continuous Bracket
- ☐ #1081.67D - Continuous Hinge and Standard Bracket
- ☐ #1081.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1081.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1081.67P - Barrel Hinge and Continuous Bracket


### GAPLESS MODEL OPTIONS:

- ☐ #1081G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1081G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1081G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1081G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1081G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1081G.67P - Gapless, Barrel Hinge and Continuous Bracket

## 1082 SERIES OVERHEAD-BRACED

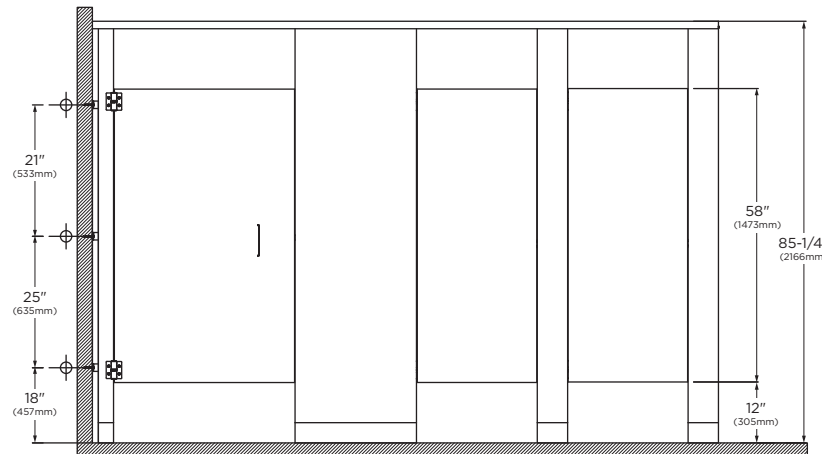

Front View

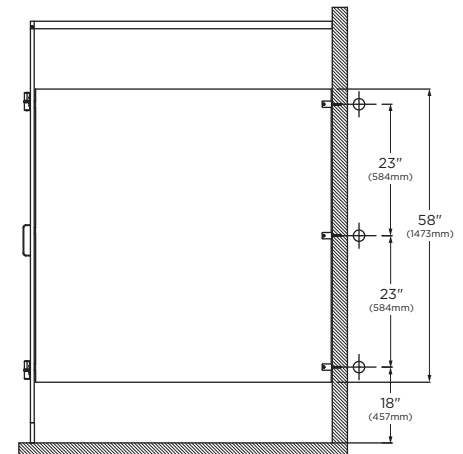

Side View

### STANDARD:

- ☐ #1082 - Barrel Hinge and Standard Bracket


### MODEL OPTIONS:

- ☐ #1082.67 - Continuous Hinge and Continuous Bracket
- ☐ #1082.67D - Continuous Hinge and Standard Bracket
- ☐ #1082.67DDS - Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1082.67DS - Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1082.67P - Barrel Hinge and Continuous Bracket


### GAPLESS MODEL OPTIONS:

- ☐ #1082G - Gapless, Barrel Hinge and Standard Bracket
- ☐ #1082G.67 - Gapless, Continuous Hinge and Continuous Bracket
- ☐ #1082G.67D - Gapless, Continuous Hinge and Standard Bracket
- ☐ #1082G.67DDS - Gapless, Continuous Hinge, Standard Bracket and Door Stop
- ☐ #1082G.67DS - Gapless, Continuous Hinge, Continuous Bracket and Door Stop
- ☐ #1082G.67P - Gapless, Barrel Hinge and Continuous Bracket


### Headrail Installation Detail

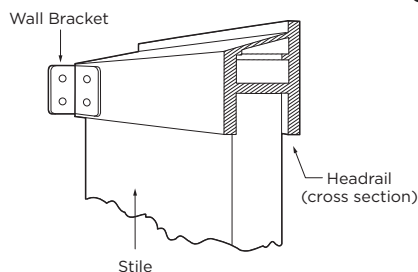

### Curtain Track Installation Detail



## 1080 URINAL SCREENS:

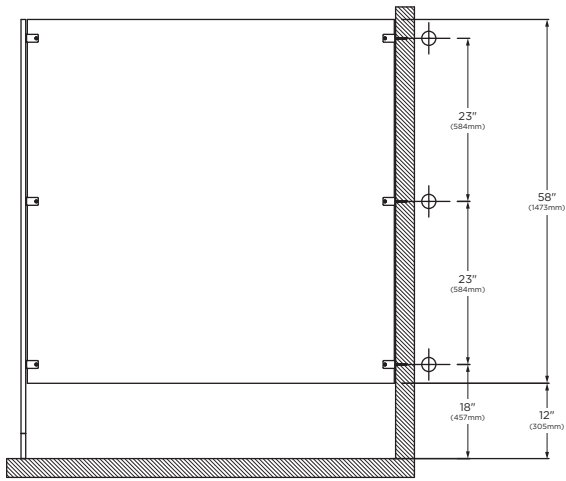


**FLOOR ANCHORED URINAL SCREEN**

### STANDARD:

- ☐ #1081 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1081.67 - Continuous Bracket

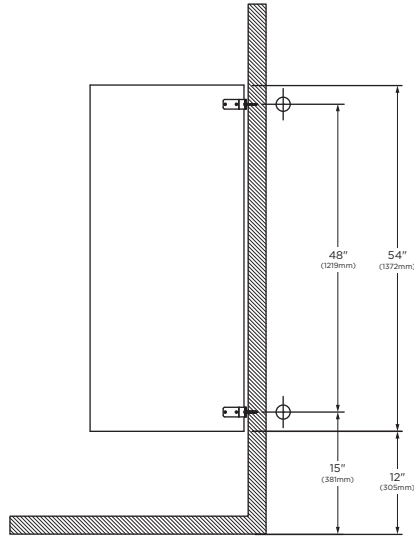

**WALL MOUNTED URINAL SCREEN**

Up to 54" (1372mm) high.




### STANDARD:

- ☐ #1085 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1085.67 - Continuous Bracket


## #1002956 W/H Urinal Screen Bracket



## #1002966 #10-32 x 1-1/4" (38mm) Pin-in-Head Torx Screw



## #1000133 Acorn Nut #10-32 Through-Bolt Urinal Screen

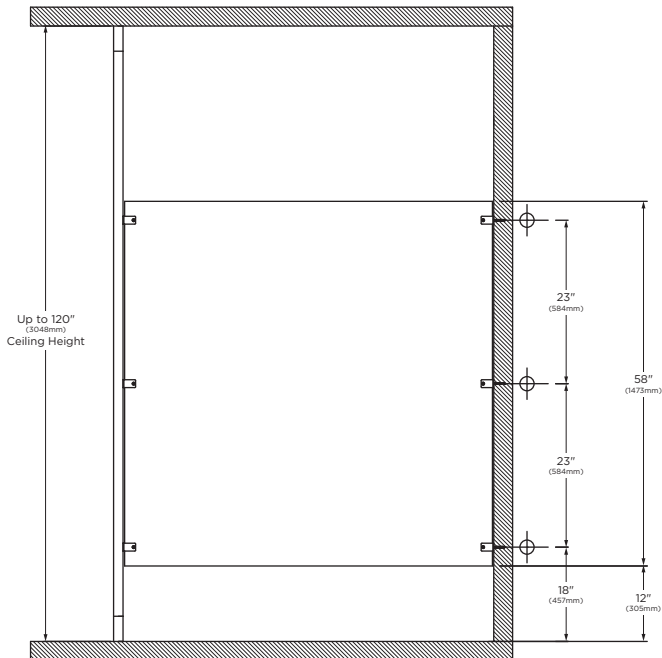


**POST-TO-CEILING URINAL SCREEN**

### STANDARD:

- ☐ #1083 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1083.67 - Continuous Bracket

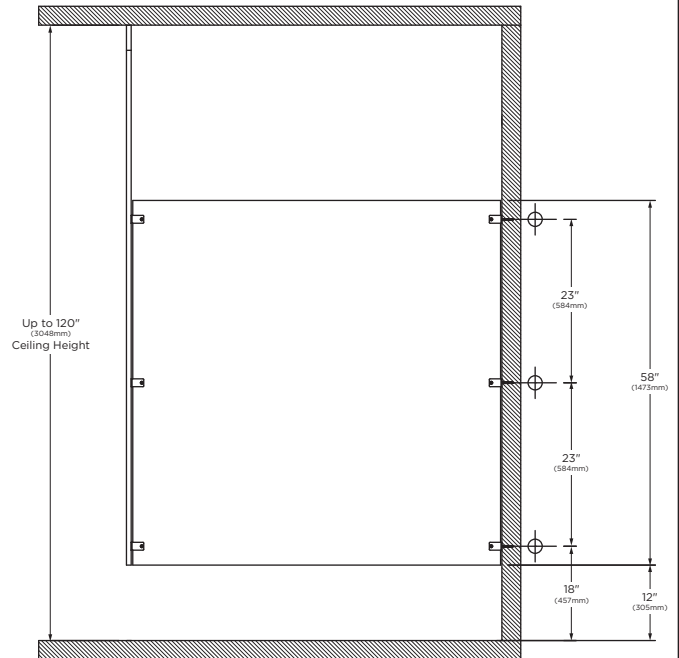

**CEILING-HUNG URINAL SCREEN**

### STANDARD:

- ☐ #1088 - Standard Bracket

### MODEL OPTIONS:

- ☐ #1088.67 - Continuous Bracket

## INSTALLATION:

Refer to Bobrick installation instructions packed with each shipment. Also available on [bobrick.com](http://bobrick.com). Form No. 1080-69.

## NOTES:

1. Ceiling-hung and floor-to-ceiling toilet compartments require structural members (not furnished by Bobrick) in ceiling. For suggested types of ceiling support systems, see Bobrick Advisory Bulletin TB-32.
2. Wall backing is required to secure the mounting brackets of panels, stiles, and wall posts. For suggested wall backing, see Bobrick Advisory Bulletin TB-46.
3. Floor-anchored stiles are furnished with expansion shields and threaded rods. The expansion shields require minimum 2" (50mm) penetration into minimum 3" (75mm) thick structural concrete.
4. Bobrick stainless steel partition-mounted washroom accessories are available for mounting in panels between two compartments. See current Bobrick Catalog for description of accessories. Cutouts in panels can be pre-cut for Bobrick models at factory if location and size of all cutouts and Bobrick model numbers are furnished at time of order.
5. When the hinge cam has been set at the desired free resting position, "either closed or open" the top of the affixed components will be aligned.

## GUARANTEE:

Bobrick toilet partitions including all hardware and mounting brackets are guaranteed to be free from defects in material and workmanship for a period of one year from date of purchase. Any products returned to Bobrick under this guarantee will be repaired or replaced at no charge. **25-Year Warranty:** Bobrick extends a twenty-five-year limited warranty from date of purchase for DuraLineSeries Compact Grade Laminate partition panels, doors, and stiles against breakage, corrosion, delamination, and defects in factory workmanship when materials are properly installed, then used and serviced normally.

## SPECIFICATION:



Compact Grade Laminate (Solid Phenolic) \_\_\_\_\_ (insert one: toilet partitions, dressing compartments, shower dividers, urinal screens, entrance screens) shall be \_\_\_\_\_ (insert one: floor-anchored, overhead-braced, floor-to-ceiling anchored, ceiling-hung, wall-hung, post-to-ceiling). Stiles, panels and doors shall be constructed of solidly fused Compact Grade Laminate with matte-finish melamine surfaces, colored face sheets, and black phenolic-resin core that are integrally bonded; and covered by a 25-year limited warranty against breakage, corrosion, and delamination. Stiles and doors shall be 3/4" (19mm) thick; panels shall be 1/2" (13mm) thick. All units shall meet ICC, NFPA Class B, ASTM E-84 Interior Wall and Ceiling Finish Classification. Stiles shall have leveling device that is concealed by a one-piece, type-304, satin-finish stainless steel shoe that is 4" (102mm) high. Stiles, panels and doors shall be \_\_\_\_\_ (insert color name and number from current Bobrick Catalog). Headrails for overhead-braced compartments shall be anodized aluminum with satin finish. \*\*All door hardware and mounting brackets shall be Type-304 stainless steel. No door hardware or mounting brackets shall be exposed on exterior of compartments, except on outswing doors. All doors shall be supplied with two hinges. Threaded inserts shall be factory installed for securing hinges and door latch. Theft-resistant, stainless steel pin-in-head, torx screws shall be furnished for door hardware and all mounting brackets. A clothes hook shall be furnished for each door. Hinges shall be adjustable to hold doors of unoccupied compartments partially open or fully closed, and shall allow a locked compartment to be opened from outside by lifting door to disengage latch from keeper.

\*To specify Gapless door and stile option, add suffix "G" to series number. Example: specify 1082G.

\*\*To specify Continuous hardware, replace end of specification paragraph with: .67 option. All door hardware, U-channels, and angle brackets shall be Type-304 stainless steel with satin finish: one-piece, full-height hinges shall be 16 gauge (1.6mm); one-piece, full-height U-channels and angle brackets shall be 18 gauge (1.2mm). U-channel shall be furnished to secure panels to stiles, and angle brackets furnished to secure panels and stiles to walls. Theft-resistant, stainless steel pin-in-head, torx screws shall be furnished for door hardware, U-channels, and angle brackets. A clothes hook shall be furnished for each door. Hinges shall allow locked compartment to be opened in emergency from outside by lifting door to disengage latch from keeper. Doors shall be equipped with a self-closing hinge. Threaded inserts shall be factory installed to secure all door hinges and latch.

\*\*\*Addendum: Units fabricated with FunderMax or Abet Laminati Compact Grade Laminate will meet ICC, NFPA Class A, ASTM E-84 Interior Wall and Ceiling Finish Classification.

\_\_\_\_\_ (insert one: Toilet Partitions, Dressing Compartments, Shower Dividers, Urinal Screens, Entrance Screens) shall be \_\_\_\_\_ Series (insert series number) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.
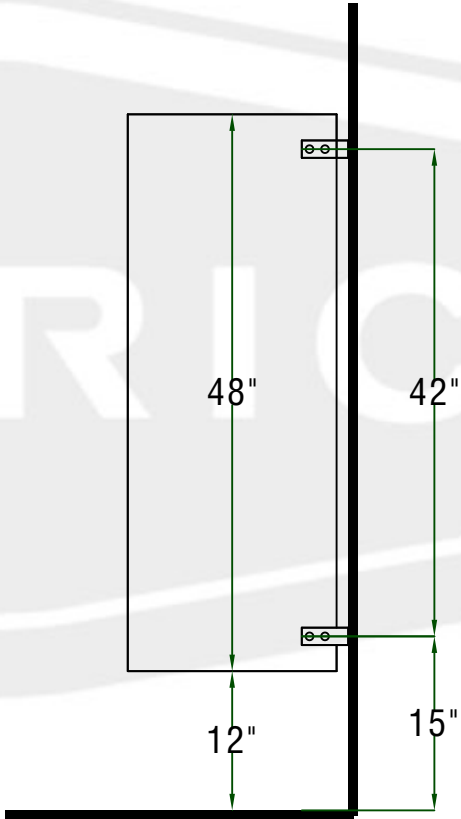
<div>BOBRICK</div> <div>DURALINE</div>		Series: 1085	Type: Screen Wall Hung	Layout: Urinal Screen	1 Of 1
COLOR SELECTION 1595-60-Black 1595-60-Black 1595-60-Black		DISTRIBUTOR 35205 - FRY SPECIALTY INC QUOTE#/S.O.# 9058872-1 P.O.# DATE 4/18/2024		JOB NAME PERACHA PARTS ROOM N/A	
Note: Dimensions are in inches					
Toilet partition and urinal screen layout drawings are the sole, confidential and proprietary property of Bobrick Washroom Equipment, Inc. The layout drawings are custom designed and prepared exclusively for the quotation and manufacture of Bobrick toilet partitions and urinal screens for the distributor and job name stated on the layout. Reproduction or distribution of the layout drawings to other toilet partition manufacturers or other persons without the prior written permission of Bobrick Washroom Equipment is strictly prohibited.					
FLOOR CLEARANCE 12					
					
PLAN VIEW		SIDE VIEW			
MAKE 1 UNITS THUS					
1. O.A.=OVERALL GAP, 1/2" FROM WALL TO PANEL PLUS 1/4" PANEL TO STILE NOTES FOR INSTALLER: UNLESS OTHERWISE SPECIFIED		<div><div>S</div> STILE<div>W</div> WALLPOST<div>D</div> DOOR<div>P</div> PANEL<div>H</div> HEADRAIL<div>B</div> BENCH</div>			
EACH DRAWING MUST BE SIGNED APPROVED BEFORE FABRICATION CAN BEGIN. FABRICATION WILL BE FROM FINAL APPROVED DRAWINGS ONLY. PLEASE REVIEW CAREFULLY BEFORE SIGNING APPROVED.					
APPROVED _____					



Quote: 9058872-1

BOBRICK CUT SHEET

PAGE: 1

Dist.: FRY SPECIALTY INC

DATE: 4/18/2024

S.O.: P.O.:

SERIES	COLOR	PART	QTY	NET SIZE	CORE SIZE	QTY	LAMINATE SIZE
1082	#1595-60 Black	Stile	1	3 X 83 X 3/4	3 X 81 9/16 X 3/4		
1085	#1595-60 Black	Panel	1	17 5/8 X 48 X 1/2	17 5/8 X 48 X 1/2		

Bobrick Hardware Sheet

Quote: 9058872-1

Page: 1

S.O.:

P.O.:

Date: 4/18/2024

Dist.: FRY SPECIALTY INC

Job : PERACHA PARTS

Ship Date: 04/18/2024

Part #	Description	Room Number										
		1	2	3	4	5	6	7	8	9	10	Total
1000133	Nut, Acorn	4										4
1000974	Y Bracket			3								3
1002175	Shoe 3"			1								1
1002185	Clip, Shoe			1								1
1002189	Screw, Shoe			2								2
1002495	Torx Screw-#12 X 2 Sht Mtl, 25 pack	6		6								1
1002499	Torx Screw-#12 X 7/16 Sht Mtl, 25 pack			12								1
1002701	Floor Anchor Pkt,Single-1080			1								1
1002956	W/H Urinal Screen Bracket, 1/2	2										2
1002966	#10-32 Torx Screw	4										4
1045-69	Instruction book, Rev 10/06/2020	1										1
1080-69	Instruction Book, Rev 2/6/23	1										1