

# Phenolic (GGL) Toilet Partitions

---



Standard Stainless Steel Hardware



Standard Reduced Gap



## Height Options

Privacy is increasingly seen as an expectation. Gaps and sightlines are among the most common complaints about today's toilet partitions.

### HEIGHT OPTIONS



#### Standard Height:

58" doors & panels,  
12" floor clearance

**Available On:** All Systems



#### Maximum Height:

71 3/4" doors & panels,  
4 1/2" floor clearance

**Available On:** All Systems



#### Extended Height:

84" to 96" doors & panels,  
1" floor clearance

**Available On:** DuraLineSeries CGL  
(Overhead-Braced and  
Floor-to-Ceiling only)

### GAP OPTIONS



#### Standard Reduced-Gap:

±3/32" door-to-stile  
gaps, 1/2" to 1" wall gaps

**Available On:** All Systems



#### Gap-Free Doors & Stiles:

Interlocking, sightline-free design

**Available On:** DuraLineSeries CGL,  
SierraSeries SCRC



## Design Options

### MOUNTING CONFIGURATIONS



#### Floor-Anchored



#### Overhead-Braced



#### Floor-to-Ceiling



#### Ceiling-Hung



## Design Options

### STANDARD HARDWARE



## HARDWARE

### ☐ Full-Height Brackets



### ☐ Full-Height Hinges






### ☐ Occupancy Indicator Latch

(Standard with Extended Privacy, Systems)



## SPEC SUMMARY

|  Select a Material  |  Select Privacy Options  |  Select Design Options  |
|--|---|--|
| <div><input checked="" type="checkbox"/> DuraLineSeries CGL<br/><b>ASTM E 84 Fire Ratings:</b><br/>Class A (1180 Series) or<br/>Class B (1080 Series)</div> <div><input type="checkbox"/> SierraSeries SCRC<br/><b>ASTM E 84 Fire Rating:</b><br/>Class B (1090 Series)</div> <div><input type="checkbox"/> DesignerSeries HPL<br/><b>ASTM E 84 Fire Rating:</b><br/>Class B (1040 Series)</div> <div><input type="checkbox"/> MetroSeries HPL<br/><b>ASTM E 84 Fire Rating:</b><br/>Class B (1550 Series)</div> | <div><b>Height Options</b><br/><input checked="" type="checkbox"/> <b>Standard:</b><br/>58" doors &amp; panels, 12"<br/>floor clearance</div> <div><input type="checkbox"/> <b>Maximum</b><br/><br/>71 3/4" doors &amp; panels, 4<br/>1/2" floor clearance</div> <div><input type="checkbox"/> <b>Extended:</b><br/><br/>84" to 96" doors &amp; panels, 1"<br/>floor clearance</div> <div><b>Gap Options</b><br/><input checked="" type="checkbox"/> <b>Standard Reduced-Gap</b><br/>Available On:</div> <div><input type="checkbox"/> <b>Gap-Free Doors &amp; Stiles</b><br/>Available On:</div> | <div><b>Hardware Options</b><br/><input type="checkbox"/> Heavy Duty Full-Height Stainless<br/>Steel Brackets</div> <div><input type="checkbox"/> Heavy Duty Full-Height Stainless<br/>Steel Hinges</div> <div><input type="checkbox"/> Occupancy Indicator Latch<br/>(Standard with Extended Privacy)</div> <div><b>Mounting Configurations</b><br/><input type="checkbox"/> Floor-Anchored<br/><input checked="" type="checkbox"/> Overhead-Braced<br/><input type="checkbox"/> Floor-to-Ceiling<br/><input type="checkbox"/> Ceiling-Hung</div> |

## COMPACT GRADE LAMINATE (CGL) STANDARD COLORS & PATTERNS

### Single Piece Panels Available Up To 5'




<sup>1</sup> Wilsonart® SOLICOR™ is a specialty laminate with a solid color core to match the surface. Color upcharge premium applies.

### Single Piece Panels Available Up To 6' <sup>2</sup>



### Additional Colors: Solid Color CGL - Wilsonart® Solicor™ Colors & Patterns

Non-stock; made to order, lead times and color upcharge premiums apply. Samples can be requested from the manufacturer.

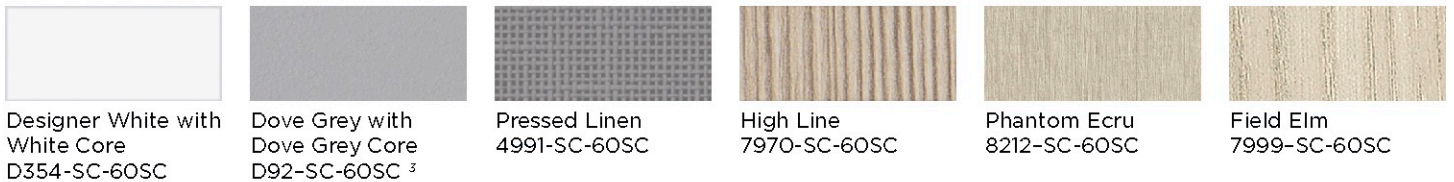

<sup>1</sup> Wilsonart® SOLICOR™ is a specialty laminate with a solid color core to match the surface. Color upcharge premium applies.

<sup>2</sup> Standard color by ABET LAMINATI and FUNDERMAX® allows for single panel width up to 72", eliminating use of additional hardware. Meets Class A fire rating without upcharge.

<sup>3</sup> Available for the Rapid Response program starting September 15, 2025.

Hundreds of additional CGL colors are available from our partners; additional lead time will apply. Please consult with ABET LAMINATI®, ARBORITE®, FORMICA®, Wilsonart® or FUNDERMAX® for color options. Non-stock Abet Laminati or FUNDERMAX colors carry a significant lead time of 10-14 weeks.













ABET LAMINATI is a trademark of ABET Inc. and ABET LAMINATI S.p.A. ARBORITE and Wilsonart are registered trademarks of Wilsonart Engineered Surfaces and Wilsonart International, Inc. SOLICOR is a trademark of Wilsonart Engineered Surfaces and Wilsonart International, Inc. FORMICA and the FORMICA Anvil logo are registered trademarks of The Diller Corporation. © 2015 The Diller Corporation. FUNDERMAX is a registered trademark of FUNDERMAX GmbH.



# MATERIAL OVERVIEW

## Scratch, Dent and Graffiti Resistance


Compared to competitive materials, Bobrick materials perform exceptionally well for scratch, dent and graffiti resistance when subjected to industry-standard ASTM test protocols. Consider the relative price of Bobrick’s high performance substrates and it’s clear: Bobrick materials are the pinnacle of value.

|                                | Material                                     | Price Index   | Scratch Resistance<br>ASTM D 2197<br>Weight Required to Scratch                           | Impact Resistance<br>ASTM D 2794<br>Visible Damage, Inches-Pounds Per Force (lbf)           | Graffiti Resistance<br>ASTM D 6578<br>Marks Removed (Out of 6)                          | Interior Finish Classification<br>ASTM E 84   |
|--------------------------------|--|---------------|---|---|---|---|
| Bobrick Material               | Compact Grade Laminate (CGL)<br>(Black Core) | \$\$-\$\$\$\$ |  >10kg   | 168" -lbf  | 5    | Class A or B  |
| Other Manufacturers' Materials | Powder-Coated Metal                          | \$            |  <0.5kg  | 2" -lbf    | 4    | Class A   |
|                                | Plastic (HDPE)                               | \$\$          |  <0.5kg | <1" -lbf  | 3   | In 48 states and Washington, D.C., ASTM E 84 is not the relevant test. Must pass an unmodified NFPA 286 test. |
|                                | Stainless Steel                              | \$\$\$\$\$    |  1.0kg | 2" -lbf  | 5  | Class A   |

### Bobrick Material



Compact Grade Laminate (CGL)

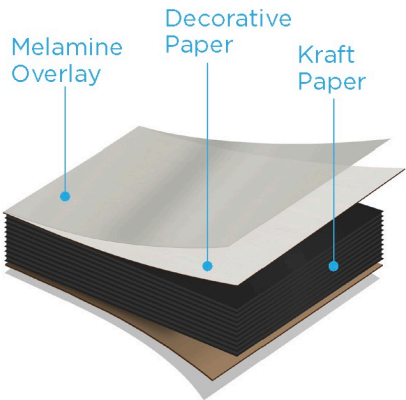


### Material Specification:

Solidly fused plastic laminate with matte-finish melamine surfaces; integrally bonded colored face sheets and black phenolic-resin core.


- Scratch, moisture, impact and graffiti resistant
- Class A or B ASTM E 84 classification
- Wide selection of colors and patterns

**Available on:** Evolve Cubicles, Traditional DuraLineSeries®

### Other Manufacturers' Materials



Powder-Coated Metal



Plastic (HDPE)



Stainless Steel